

PRINCE HENRY SITE

Development Control Plan







Approved 27 July 2004 Effective Date 8 December 2004



CONTENTS

1.0 INTRODUCTION

- 1.1 Purpose
- 1.2 What is the Plan called?
- 1.3 Where does the Plan apply?
- 1.4 Objectives
- 1.5 Relationship to other Plans, Policies and Documents
- 1.6 How to use this DCP
- 1.7 Site Analysis
- 1.8 The Development Application Process
- 1.9 Heritage Requirements
- 1.10 Affordable housing requirements

2.0 SITE CONTEXT

- 2.1 Regional and Local Context
- 2.2 Precincts
- 2.3 Transport and Access Links
- 2.4 Views and Vistas
- 2.5 Landscape
- 2.6 Heritage Context
- 2.7 Archaeological Context
- 2.8 Built Form
- 2.9 Sustainable Design
- 2.10 Desired Future Character

3.0 SUBDIVISION AND AMALGAMATION

4.0 BUILDING AND SITE DESIGN

- 4.1 Building Envelope
- 4.2 Height
- 4.3 Building Depth
- 4.4 Density
- 4.5 Setbacks
- 4.6 Building Articulation
- 4.7 Landscaped Area and Private Open Space
- 4.8 Landscape Design and Biodiversity
- 4.9 Development Adjacent to Watercourses
- 4.10 Activity Strip
- 4.11 Solar Access
- 4.12 Acoustic Privacy
- 4.13 Visual Privacy
- 4.14 Dwelling Layout and Mix
- 4.15 Roof Design
- 4.16 Fences
- 4.17 Safety and Security
- 4.18 Materials and Finishes
- 4.19 Signs

5.0 SUSTAINABLE DESIGN

- 5.1 Energy and Greenhouse
- 5.2 Total Water Cycle Management
- 5.3 BASIX Building Sustainability Index
- 5.4 Waste Management and Minimisation
- 5.5 Environmental Education
- 5.6 Bushfire Risk Management
- 5.7 Contaminated Land



6.0 FACILITIES AND ACCESS

- 6.1 Pedestrian and Cycle Access
- 6.2 Barrier Free Access
- 6.3 Vehicle Access and Parking
- 6.4 Driveway Design
- 6.5 Utilities/Site Facilities
- 6.6 Storage

7.0 PRECINCT CONTROLS

- 7.1 Precinct P1
- 7.2 Precinct P2
- 7.3 Precinct P3
- 7.4 Precinct P4
- 7.5 Precinct P5
- 7.6 Historic Precinct

Definitions

Checklist

Acknowledgements

Appendices

Appendix A	List of species		
Appendix B	Bushfire Risk Management Report (2001), NSW		
	Bushfire Brigades, Specialised State Operations,		
	Bushfire/Natural Hazards Section		
Appendix C	Map extracts from the Archaeological Management		
	Plan and the Conservation Management Plan		
Appendix D	Total Water Cycle Strategy		
Appendix E	Watercourse Categories and Riparian Land Widths		
Appendix F	Specific Elements Conservation Policies (SECP)		

List of Figures

_	
AA	Land to which this DCP applies
1.	Key Plan and Lot Numbers
1A.	Transport Links and Access
2.	Views and Vistas
3.	Key Landscape Structure
4.	Built and Landscape Heritage
5.	Aboriginal and Historical Archaeology
6.	Building Density
7.	Built Form Controls
8-9.	Precinct P1
10-11.	Precinct P2
12-13.	Precinct P3
14-16.	Precinct P4
17.	Precinct P5
18-21.	Historic Precinct

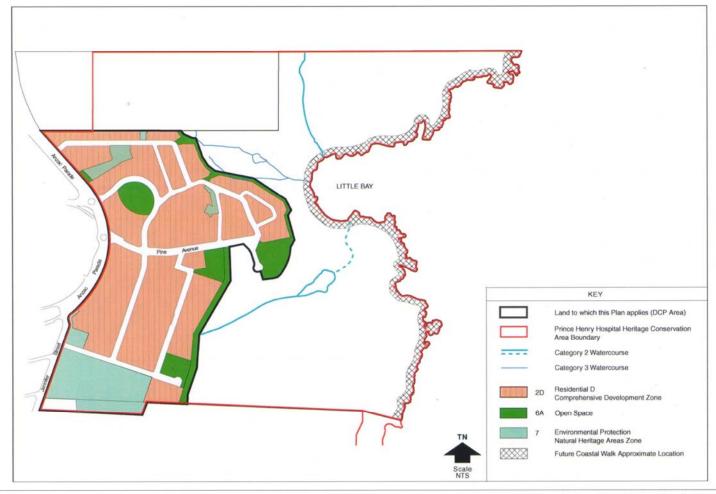


Figure AA: Land to which this plan applies

December 2004



1.0 INTRODUCTION

1.1 Purpose

This Development Control Plan (DCP) provides a framework for the redevelopment at the Prince Henry Hospital site at Little Bay. The Plan provides performance criteria and controls to guide the built form, environmental and amenity standards, and requirements for appropriate heritage protection for the site.

This DCP has been prepared in accordance with Section 72 of the Environmental Planning and Assessment (EP&A) Act 1979 and the EP&A Regulations in 2000.

1.2 What is the Plan Called?

This plan may be cited as the 'Prince Henry Development Control Plan'. This plan was adopted by Randwick City Council on 27 July 2004 and came into effect on 8 December 2004.

1.3 Where does the plan apply?

This plan is a site specific DCP that applies to the land shown in Figure AA. Under Section 79C of the Environmental Planning and Assessment Act 1979, Council is required to take the provisions of this DCP into account when it determines development applications on this land.

1.4 Objectives

The objectives of this DCP are to:

- a) to create a sustainable neighbourhood that integrates new and existing development
- b) to ensure design reflects the site's unique location and characteristics
- to conserve the heritage significance of the Prince Henry site and the natural and cultural elements that contribute to the significance of the site and its setting.
- d) to protect the visual amenity and scenic value of the coastline.
- e) to ensure development reflects the principles of the adopted master plan for the site.
- to ensure development within the DCP area demonstrates architectural merit and incorporates high quality materials and finishes.
- g) to ensure development within the DCP area promotes and incorporates the principles of ecologically sustainable development (ESD).
- h) to provide for a mix of land uses and dwelling types.
- to provide for a housing choice to accommodate the needs of current and future households and to provide for affordable housing in accordance with State Government and Council plans and policies.
- to protect and enhance remnant native vegetation, habitat corridors, riparian buffers and wetland areas



1.5 Relationship to other Plans, Policies and Documents

This plan should be read in conjunction with the provisions of the EP&A Act 1979, Randwick Local Environmental Plan 1998, and other relevant planning instruments, DCPs and Council Policies and Codes.

It should also be read in conjunction with the following:

- NSW National Parks and Wildlife Act;
- Prince Henry Master Plan (adopted with variations May 2003);
- the Prince Henry Site, Little Bay Conservation Management Plan (CMP) prepared by Godden Mackay Logan, May 2002 (amended February 2003), and any subsequent amendments endorsed by the NSW Heritage Council;
- the Prince Henry Site, Little Bay Archaeological Management Plan (AMP) prepared by Godden Mackay Logan, August 2002;
- any Specific Elements Conservation Policy (SECP) for the site, as required by the CMP (see Appendix F); and
- the Bushland Plan of Management (POM) and the Little Bay Geological Reserve Plan of Management (POM).

The principles of the master plan are reflected as objectives and principles in the relevant sections of this DCP. To the extent of any inconsistencies with any other DCPs, this DCP prevails.

1.6 How to use this DCP

Part 1 is the introduction to and purpose of the DCP, including Development Application Requirements.

Part 2 outlines the site context and key design principles on which this DCP is based. **Figures 1-7** are inserted at the end of Part 2.

Part 3 is about subdivision and lot orientation.

Part 4 is about building design and location. Key elements include:

- building envelope and articulation
- landscaped area and private open space
- apartment mix and design
- material selection

Part 5 is about sustainable design and contains requirements for multi unit dwellings (State Environmental Planning Policy (Building Sustainability Index: BASIX) 2004 applies to all single dwellings). Key elements include energy efficiency and total water cycle management.

Part 6 is about parking, access and site facilities.

Part 7 contains detailed precinct guidelines for each precinct within the site. **Figures 8-20** are inserted at the back of Part 7.



Applicants should also refer to Council's **DA Guide**.

1.7 Site Analysis

A site analysis identifies existing conditions of a specific development site in relation to surrounding buildings and landscape characteristics. A site analysis is necessary to ensure that the development is of a high quality, sensitive to its environment and that it positively contributes to its context. The site layout and building design must demonstrate how the opportunities and constraints of the site and its surrounds have been addressed, such as minimising issues relating to noise, overshadowing, community safety, access, views, privacy, energy consumption and waste generation.

The Applicant must demonstrate to Council that the site analysis has been utilised in preparing the design for the site and that due consideration has been given to the opportunities and constraints identified.

Applicants must also demonstrate that the key principles in **Part 2** of this DCP have been considered and addressed in the site analysis.

A site analysis drawing must be based on a survey drawing produced by a qualified surveyor. Information required in a site analysis includes, but is not limited to:

- site dimensions, area and north point
- topography, showing spot levels and contours
- views to and from the site
- prevailing winds
- location, use and heritage significance of any existing buildings or archaeological features on the site and on adjacent properties
- location, use and overall height (in storeys and metres) of adjacent buildings
- location and height of existing windows and balconies on adjacent properties
- location and size of significant and heritage plantings on site, on adjacent properties, and any street trees
- location of any remnant native vegetation, habitat corridors, or riparian buffers (site analysis should also demonstrate how loss of remnant vegetation has been minimised)
- orientation and overshadowing of the site and adjoining properties
- pedestrian and vehicular access points (existing and proposed) and bus stops (if any)
- location of utility services, including electricity poles, stormwater drainage lines, natural drainage, kerb crossings and easements

Refer to Council's DA guide.

1.8 The Development Application Process

The Applicant is encouraged to have pre-lodgement meetings with Council prior to the lodgement of the DA.

a) Statement of Environmental Effects

All development applications must include a Statement of Environmental Effects. This statement must:

- describe the proposed development including any preliminary site work and proposed uses;
- identify and assess the environmental impact of the development;
- set out any measures taken to mitigate any likely adverse environmental impact;
- address the requirements of the LEP and this Development Control Plan;



- address the design quality principles of State Environmental Planning Policy No. 65 (SEPP 65) – Design Quality of Residential Flat Buildings (where applicable);
- demonstrate compliance with environmental controls and identify any additional measures that further enhance ecologically sustainable development;
- include or be accompanied by a Heritage Impact Statement (refer to Section 1.9 Heritage Requirements);
- include an economic analysis if applicable (refer to Section 4.10 Activity Strip); and
- provide comprehensive justification for any non-compliance with any control in the DCP having regard to the objectives for the control.

b) The Randwick-Waverley Design Review Panel

Development Applications will be referred to Council's Design Review Panel (where applicable), under the provisions of SEPP 65, at the pre-lodgement stage. DAs may also be referred to the panel again at DA stage as part of the development assessment process.

c) Other Documents

In addition to the Statement of Environmental Effects and the requirements outlined in Council's DA Guide, check that the following documents are included with the DA (refer to the **checklist** enclosed at the back of this DCP):

- Site analysis (Section 1.7)
- Landscape Plan (Sections 4.7 and 4.8)
- Heritage Impact Statement (including Aboriginal Heritage Assessment if applicable) and any associated documents (Sections 1.9, 2.6, 2.7)
- Economic Analysis for commercial/retail development (Section 4.10)
- Noise and Vibration Assessment (Section 4.12)
- Crime Risk Assessment (Section 4.17)
- Sample board (Section 4.18)
- Waste Management Plan (Section 5.4)
- Environmental Education Kit (Section 5.5)

In addition, all dwelling houses require:

- a BASIX Certificate (Section 5.3)

And all **multi unit¹** and **mixed use** development requires:

- a NatHERS Certificate or equivalent (Sections 5.1 and 5.2)
- a Sustainable Building report (Section 5.1)
- a Total Water Cycle Strategy (Section 5.2)

These documents must be prepared by the relevant certification body/suitably qualified professionals, and **must be submitted at DA stage**.

¹ It is noted that State Environmental Planning Policy (Building Sustainability: BASIX) 2004 will replace the water and energy conservation requirements when it comes into effect for **multi unit housing** (Stage 2). It is anticipated that this will occur in October 2004. Applicants are advised to check with DIPNR or Council prior to DA lodgement.



1.9 Heritage Requirements

Most development applications for development within the Prince Henry site will constitute Integrated Development, due to the site's listing on the NSW State Heritage Register, and sometimes because approvals may be required under other Acts. Applicants should check with Council to determine Integrated Development requirements prior to lodging any development application.

A Heritage Impact Statement (HIS) prepared by a suitably qualified professional must be included with any development application, together with a Specific Elements Conservation Policy (SECP) (where applicable).

Applicants should refer to the Conservation Management Plan (CMP), the Archaeological Management Plan (AMP) and any relevant Specific Elements Conservation Management Policy (SECP) when preparing a Development Application.

Key requirements identified in these plans/policies are noted below:

Built and Landscape Elements

 Significant built and landscape items and elements should be retained, conserved, managed and interpreted in accordance with the detailed policies in the Conservation Management Plan (CMP) and any relevant Specific Elements Conservation Policy (SECP) as well as the requirements of the NSW Heritage Act 1977.

Aboriginal Archaeology

- Identified and potential Aboriginal archaeological objects and sites are to be conserved and managed in accordance with the Archaeological Management Plan (AMP) and the requirements of the NSW National Parks and Wildlife Act 1974.
- Damage or destruction of any Aboriginal object or place is only permitted where a permit or consent has been issued by the Director of the National Parks and Wildlife Service (NPWS), Department of Environment and Conservation.
- Any proposals affecting known or discovered Aboriginal objects or places on the Prince Henry site or proposals that will disturb the ground within identified Aboriginal Archaeological Zones must be referred to the La Perouse Local Aboriginal Land Council (LPLALC).
- Prepare an Aboriginal Heritage assessment if required (see Section 2.7).

Historical Archaeology

- Identified and potential archaeological relics and sites are to be conserved and managed in accordance with the Archaeological Management Plan (AMP) and the requirements of the NSW Heritage Act.
- Where the archaeological assessment determines that the development would disturb a potential historical archaeological resource, an application for an excavation permit issued under the NSW Heritage Act is required.

1.10 Affordable Housing Requirements

1% of all dwellings (ie an estimated eight dwellings) within the site (except the aged care dwellings) will be made available for affordable housing. The mix will be:

Number of Apartments	Type of Apartment
One	One-bedroom
Five	Two-bedroom
Two	Three-bedroom



2.0 SITE CONTEXT

This section outlines the context and key features of the Prince Henry site as well as the key design principles for the DCP area.

2.1 Regional and Local Context

The Prince Henry site is located on Anzac Parade at Little Bay, at the southern end of the Randwick Local Government Area and the Eastern Beaches. The Prince Henry DCP area is part of the broader Prince Henry site. The DCP area is bound by the University of New South Wales (UNSW) land to the north, The Coast Golf Course and Little Bay beach to the east, the Spinal Injuries Australia and Golf Driving Range to the south, St Michaels Golf Course to the south-east, and Anzac Parade to the west.

The Little Bay-La Perouse area is characterised by detached dwellings in a mix of styles, with some Department of Housing apartment buildings.

The DCP area has a rich Aboriginal and European history. From 1881-1934 this area was occupied by the Coast Hospital, built for the isolation and treatment of infectious diseases. Apart from archaeological evidence, the main evidence of this phase that remains within the DCP area includes Pine Avenue (including alignment, pine trees and sandstone kerbing) and the Artisans Cottages and associated water reservoir. 1915-1934 saw the expansion of the Coast Hospital, which included the construction of the Flowers Wards. The Flowers Wards and all other mentioned aspects remain within the DCP area today and are to be adapted for residential and community re-use.

In November 1934 it was announced that the Coast Hospital was to be renamed the 'Prince Henry Hospital' in honour of Prince Henry, the Duke of Gloucester, who had recently visited Sydney. The period from 1935-1959 saw the hospital's capacity increased and the construction of more new buildings. From the 1960s to 2002 saw the role of the Prince Henry Hospital as a general and major teaching hospital established and consolidated. The Interdenominational Australian Nurses War Memorial Chapel is one of the key buildings from this phase that will be retained within the DCP area.

Aboriginal occupation of this area pre-dates European settlement by many years. Evidence of Aboriginal occupation prior to the establishment of the Coast Hospital in 1881, includes a diverse collection of middens, open campsites, rock engravings, axe grinding grooves and a possible fish trap and an ochre source. The majority of identified sites lie outside the DCP area, however there is potential for previously unidentified artefacts and significant sites to lie within the DCP area.

The Prince Henry Hospital Site (including the DCP area) is listed on the NSW State Heritage Register.

2.2 Precincts

The Prince Henry Site is divided into 6 precincts for the purpose of this DCP. These precincts are shown on **Figure 1**. The Historic Precinct runs through the core of the DCP area. This precinct contains most of the buildings and landscape items of heritage significance, however the whole of the former Prince Henry Hospital site is a highly significant cultural landscape and other precincts contain items of heritage significance. Precincts P1, P3 and P4 provide for a mix of residential densities. Precinct P2 is located on the corner of Pine Avenue and Anzac Parade, the main entry to the site. This mixed use precinct will comprise local neighbourhood scale shops, including a potential supermarket, and commercial uses, with residential uses above. Precinct P5 is located at the eastern end of Pine Avenue on the eastern edge of the DCP area. This precinct will contain a Community Recreation Centre that will serve the needs of the incoming residents as well as the wider community.

Part 7 of the DCP contains performance criteria and controls that are specific to each of these precincts. These precinct specific requirements provide an additional layer of detail to the general performance criteria and controls contained in the other parts of the DCP (Parts 1-6).

To the extent of any inconsistencies between the general and precinct specific requirements the precinct specific requirements prevail.



2.3 Transport Links and Access

Anzac Parade links the DCP area to the remainder of Randwick City. As shown on Figure 1A, there are three proposed vehicular access points to the DCP area from Anzac Parade. A fourth vehicular access to the southern part of DCP area from Jennifer Street is proposed.

The DCP area is currently served by State Transit Authority bus routes that run along Anzac Parade. Figure 1A shows an indicative bus route and bus stops through the DCP area.

It is proposed to make provision for a cycleway along Anzac Parade, connecting the DCP area to its surrounds, including the national park to the south. As shown on Figure 1A, the cycle way will run along the southern road within the DCP area and along the buffer strip between the DCP area and the golf course, providing a dedicated shared cycle/pedestrian link from Anzac Parade to the eastern end of Pine Avenue. Roads within the DCP area will have a low speed environment, and will also be suitable for cycling.

The DCP area has a connective and convenient street layout for both vehicles and pedestrians. In addition, there are a number of pedestrian paths providing further links throughout the DCP area, and linking the DCP area to Anzac Parade. Figure 1A shows the pedestrian access down Pine Avenue, which connects to the Little Bay beach pathway.

Key principles include:

- To promote the use of alternative modes of transport to the car, including walking, cycling and public transport (bus)
- To promote safe and convenient movement throughout the DCP area

Refer to Part 6 for detailed objectives and performance criteria and controls.

2.4 Views and Vistas

Figure 2 shows the key views to and from the DCP area, and as well as views of heritage significance identified in the Conservation Management Plan (CMP). Key views include views of the ocean and coastline, views of heritage buildings, and views along significant streets within the site. Any development application will need to demonstrate that these views and vistas are retained or enhanced.

Key principles include:

- maintain and enhance significant views and vistas throughout the site
- buildings are to be designed to maximise view sharing
- to ensure the visual amenity of the coast is protected.

Refer to Part 7 for detailed objectives and performance criteria and controls.

2.5 Landscape

The Prince Henry DCP area has an open, green and uncluttered landscape quality that contributes to the setting of its heritage buildings, while retaining ocean and coastal views.

Figure 3 shows the key landscape elements of the DCP area. There are two main areas of remnant bushland, both of which contain Eastern Suburbs Banksia Scrub (ESBS), a threatened species of national significance. There is also a stand of ESBS near the former Matron Dickson building and smaller pockets of bushland elsewhere in the DCP area.

The DCP area also contains an array of culturally significant plantings, which are predominantly located within the Historic Precinct. These are identified on Figure 3 together with the key public open spaces within the DCP area. Open spaces within the DCP area have generally been located to form links with other open spaces and plantings where possible.

7



A landscaped buffer runs along the eastern edge of the DCP area, between the residential area and the Coast Golf Course. The buffer plays a number of important roles including creation of habitat, water management, safety (separation of residential and golf course uses) and public recreation (southern half of buffer only). South of Pine Avenue, the buffer is approximately 18 metres wide and will be publicly accessible via a shared pedestrian/cycle path that connects to Pine Avenue and the southern access road to the site. North of Pine Avenue, the buffer is approximately 10 metres wide. The topography in this area is much steeper and this part of the buffer will not have pedestrian access. Two small parks adjacent to this part of the buffer and located at the end of key view corridors will ensure views across the vegetated buffer to the coast are maintained as publicly accessible views.

Figure 4 identifies the significant landscape curtilages around heritage buildings.

The DCP area has a predominantly easterly aspect, exposed to breezes from the north-east, east and south. These breezes are typically cooling in summer; however in winter protection from southerly wind is desirable.

Key landscape design principles include:

- buildings are to be designed so they do not dominate the landscape and are consistent with the Prince Henry DCP area's character of "buildings within an open landscape setting dominated by sky and sea"
- locate private communal open spaces so they form visual links with other opens spaces on the site
- use local native species and species that recognise the DCP area's coastal location and that complement existing significant and heritage plantings (where appropriate to the heritage context) within the DCP area
- characterise open space by high quality landscape design that emphasises principles of sustainability and functionality
- conserve and enhance bushland areas through planting of non-invasive indigenous vegetation in areas adjacent to remnant bushland
- create a landscape that contributes to the built environment by providing climate amelioration and functional space appropriate to the needs of residents
- · repair and maintain significant riparian land
- establish and maintain biological linkages between areas of remnant native vegetation
- create a vegetated link via suitably designed landscaping along the southern boundary of the DCP area, providing a connection between the Jennifer Street remnant bushland and the golf course buffer.
- promote biological diversity and use of local native plants from locally provenanced seed where appropriate

Refer to **Sections 4.4** and **4.5** for detailed objectives and performance criteria and controls on landscape design.

2.6 Heritage Context

The Prince Henry site (of which the Prince Henry DCP area is part) is listed on the NSW State Heritage Register as an item of State heritage significance. Randwick LEP 1998 also identifies the former Prince Henry Hospital site as a conservation area. Schedule 3 of Randwick LEP 1998 contains a list of heritage items, and Schedule 4 lists known and potential archaeological sites.

Figure 4 of this DCP shows built and landscape heritage items, the extent of the Little Bay Geological site within the DCP area, key views identified as having heritage significance, the historic precinct boundary, and parts of the Prince Henry Conservation Area boundary.

The Little Bay Geological site is a site of national significance and provides evidence of topography, relative sea level, vertical land movements and coastal



landscape prior to the formation of Sydney Harbour and other coastal valleys (refer to the CMP, and Little Bay Geological Site SECP and Plan of Management).

The different types of elements of heritage significance occurring within the Prince Henry Site are summarised below:

- **Elements of Built significance** including, but not limited to, the entrance gateposts, the Clocktower, Henry's Trading Post the Matron Dickson building and the Flowers Wards. Refer to **Figure 4** for a list of items within the DCP area, and refer to the CMP for items beyond the DCP area.
- Elements of Landscape significance including, but not limited to, a
 number of natural and cultural plantings such as indigenous vegetation and
 several species of palms, banksias and Norfolk Island Pines, road
 alignments, rock outcrops and the Male Lazaret. Refer to Figure 4 for a list
 of items within the DCP area, and refer to the CMP for items beyond the
 DCP area.
- **Elements of Aboriginal significance** on the site include open and sheltered shell middens, axe-grinding grooves and rock engravings, pathways, a possible fish trap and ochre source. The Prince Henry DCP area may contain further undetected Aboriginal archaeological sites relating to both prehistoric and post-contact periods of occupation (refer to Appendix C).
- Elements of Historical Archaeological significance within the DCP area include, but are not limited to subsurface features/deposits, rock cut features associated with former activities on the site (i.e. graffiti, drainage, coastal defences etc), and sites of former structures associated with the Coast and Prince Henry Hospitals (eg lazarets, mortuary buildings) (refer to Appendix C).
- Moveable items of potential heritage significance are identified in the Conservation Management Plan, the Archaeological Management Plan, any relevant Specific Elements Conservation Policy and the Museum Plan.

Section 1.9 outlines the heritage requirements for Development Applications. In preparing development applications, applicants should refer to the following documents prepared by Godden Mackay Logan Heritage Consultants:

- Prince Henry Site, Little Bay Conservation Management Plan (CMP), May 2002 (amended February 2003), and any subsequent amendments endorsed by the NSW Heritage Council;
- Prince Henry Site, Little Bay Archaeological Management Plan (AMP), August 2002, and any subsequent amendments endorsed by the NSW Heritage Council; and
- any relevant Specific Elements Conservation Policy (SECP).

The Conservation Management Plan for the site identifies a number of heritage principles for the Prince Henry site. These *key heritage principles* include:

- Conserve, manage and interpret the site as an item (place) of State significance;
- Recognise the importance of the site as a whole, in addition to the values of
 individual components (such as natural and cultural landscape values, built
 and landscape heritage elements, and geological and archaeological
 features);
- Respect and recapture as much as possible the qualities of the site that contributed to the village atmosphere valued by the community, including significant buildings and landscape features, and the character established by generally low-scaled buildings in an open setting.
- Ensure that new development respects, enhances and contributes to the heritage significance of the site and its setting;
- Restore and reconstruct built and landscape elements that contribute to the significance of the site and its setting;
- New buildings, infill development and alterations/additions to heritage items



are to respect the design and scale of existing heritage buildings and elements on the Prince Henry Site

- Significant and heritage trees are to be protected during construction;
- New planting should retain and enhance the open landscape character of the site.

Refer to **Part 7** for detailed objectives and performance criteria and controls.

2.7 Archaeological Context

Figure 5 illustrates the Prince Henry site's aboriginal and historical archaeological features for the DCP area. This aboriginal archaeological resource has high educational, cultural and scientific significance.

Three levels of Aboriginal Archaeological Sensitivity have been identified within the Prince Henry site:

- Aboriginal Archaeological Sensitivity Zone 1 (Very High) this includes the golf course and beach (mostly outside the DCP area, with the exception of a small part of Precinct P1);
- Aboriginal Archaeological Sensitivity Zone 2 (High) this includes locations within the built areas of the site (DCP area); and
- Aboriginal Archaeological Sensitivity Zone 3 (High) this comprises the large area of remnant bushland in the south western corner of the Prince Henry site. This bushland will be retained and will not be directly affected by the redevelopment of the site.

For the full extent of aboriginal and historical archaeological items, including items located beyond the DCP area, refer to the **Archaeological Management Plan** (AMP). Extract maps from these plans are also attached as **Appendix C**.

Section 2.6 contains key principles for the management of heritage sites. In addition to these principles, *key archaeological principles* include:

- To conserve, manage and interpret identified and potential Aboriginal relics and sites in accordance with the AMP and the requirements of the NSW National Parks and Wildlife Act; and
- Development should be planned to minimise impacts on areas of Aboriginal heritage significance and should seek to enhance the values of these areas.

National Parks and Wildlife (NPWS) recommend that an **Aboriginal heritage assessment** be prepared for land under the following circumstances:

- the NSW NPWS Aboriginal Sites Register identifies sites in or near the development area, which could potentially be affected during or after the development;
- the proposed development is likely to have an impact on areas of bushland or undisturbed ground;
- the proposed development is likely to have an impact on areas containing sandstone outcrops, rock shelters, old growth trees, sand bodies and ground adjacent to watercourses, lakes and swamps; and
- the proposed development is likely to have an impact on an area of importance to the Aboriginal community not included in the above (eg story places, missions etc).

Refer to **Part 7** for precinct-specific objectives and performance criteria and controls.

Applicants should refer to the Archaeological Management Plan (AMP) prepared by Godden Mackay Logan Heritage Consultants for requirements and procedures, and should liaise with NSW NPWS to ascertain whether an Aboriginal Heritage Assessment is required.

Refer to Part 7 for precinct-specific objectives and performance criteria.



2.8 Built Form

The built form controls for the DCP area reflect the master plan principles and the site's unique features, opportunities and constraints identified in the master plan site analysis. This section provides an overview of the rationale on which the built form controls shown in **Figures 6** and **7** are based, and the site's desired future character and new development.

Existing road alignments within the Prince Henry DCP area have been retained where possible. New roads and paths have been designed to complement the existing road network.

Pine Avenue is the main entry to the DCP area, forming a central tree lined axis along one of the key vistas. The DCP area's key facilities will be located along Pine Avenue, with shops and offices at the Anzac Parade (western) end, and a community centre and path to Little Bay beach at the eastern end of Pine Avenue. Pine Avenue contains a number of significant built and landscape heritage items, including the Clocktower, entrance gateposts and the Interdenominational Australian Nurses War Memorial Chapel.

Much of the DCP area slopes away from Anzac Parade down towards the coast. The gradient of the land varies across the DCP area, and the built form controls reflect this. The tallest buildings (5 storeys and 4 storeys with loft) are to be located along Anzac Parade and at the southern end of the site, to maintain views and minimise the impact of new development on the heritage buildings.

The built form controls require a consistent setback along and strong address to Anzac Parade to strengthen its townscape qualities. The built form controls also facilitate an appropriate transition in height and scale across the DCP area to facilitate the integration of new development with existing heritage buildings. The future built form of the site will be characterised by simple block building forms, which reflect the existing rectilinear building forms, and reinforces the street pattern.

The new buildings and the adaptive re-use of retained heritage buildings will provide for a diversity of households. Consistent with the master plan, the built form controls make provision for a range of dwelling types including detached housing, terrace and courtyard housing, garden apartments, apartment buildings of 4 to 5 storeys, apartments for older persons, and a residential aged care facility. There are a number of community groups on site who will remain on site.

The open landscape character is to be maintained through buildings that do not dominate the open, coastal landscape setting of the DCP area and surrounds.

Key built form and urban design principles include:

- Create new residential and community precincts within an area of great natural beauty and heritage significance;
- Strengthen the townscape qualities of the Anzac Parade boundary of the DCP area through consistent building setbacks and strong building address to Anzac Parade;
- Integrate the new community with the existing community;
- New buildings are to comprise simple, block forms which do not dominate the site's open landscape setting;
- Encourage a strong sense of continuity through retention of significant built and landscape heritage elements.
- Maximise physical and social connection to the surrounding community;
- Provide safe access to local open spaces, recreation areas, community facilities, and public transport; and
- Reinforce safe and convenient pedestrian, cycle and vehicular access for both able and disabled persons throughout open space and public domain.

Refer to **Parts 4** and **7** for detailed objectives and performance criteria and controls.



2.9 Sustainable Design

The Prince Henry DCP area and surrounds is a unique environment and it is important to ensure development occurring within the DCP area complements and enhances the site's unique coastal location. It is also important that development minimises adverse impacts on the environment, particularly given proximity to the ocean, remnant bushland, the Little Bay Geological Site, wetland, and the watercourses to the north, north-east and east of the DCP area.

Key sustainability principles include:

- Incorporate the principles of ESD in all design.
- Maximise the opportunities for sustainable development, such as renewable energy use, energy smart features and water sensitive urban design through innovative design.
- Minimise the ecological footprint of development and impacts on the environment.
- Design sites to optimise the microclimate (ie utilising cooling summer breezes, protection from cool winter winds).
- Protect the local occurrence of endangered, threatened or protected native species listed under the Threatened Species Conservation Act 1995.
- Protect and enhance vegetated riparian corridors, wetland buffers, remnant vegetation and biological linkages between remnants.
- Optimise the community services provided.
- Minimise impact of noise from roads, open spaces and parking areas.

Refer to **Parts 4** and **5** of this DCP for detailed sustainability objectives and performance criteria and controls.

2.10 Desired Future Character


The desired future character for the redevelopment of the Prince Henry site (DCP area) can be summarised as:

- development that reflects the DCP area's open, coastal location, and that does not dominate the landscape;
- development that is well integrated with surrounding development;
- development that seeks to minimise impact on the environment and which is environmentally sustainable;
- development which maintains an appropriate setting for the heritage elements to be retained, and which is appropriate in bulk, scale and form and recognises and builds upon the existing character;
- development that presents a strong, consistent edge to Anzac Parade, softened by substantial planting, with height and scale of development then gradually decreasing towards the coast;
- development that comprises a variety of dwelling types, including affordable housing, characterised by high quality, sustainable design;
- development that includes a mix of residential, open space, community, and neighbourhood scale retail; and
- development that provides significant views and vistas throughout the site, towards the coast.



20 50 100

Figure 1: Key Plan Precinct and Lot Numbers

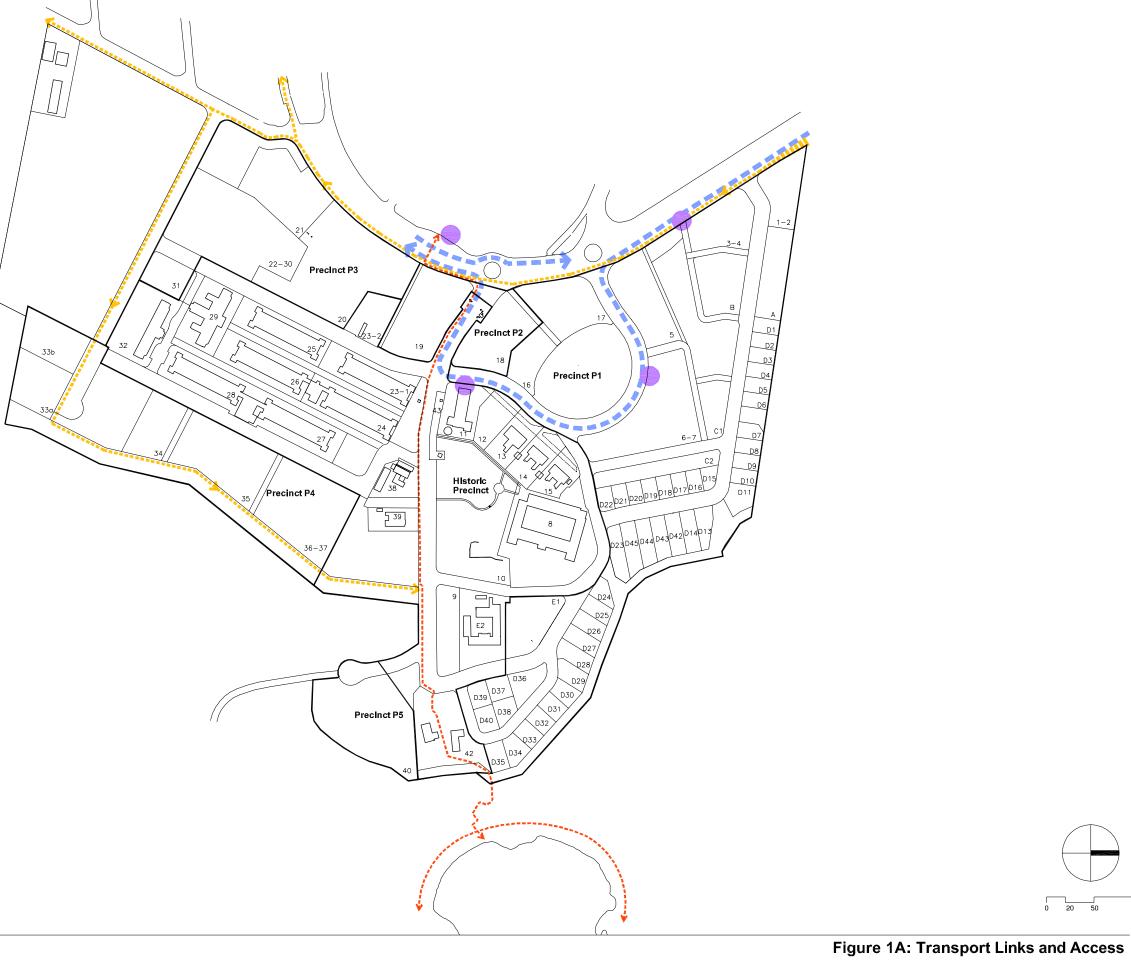

Bus route

Bus stop (indicative)

Cycle path

---- Primary pedestrian access



0 20 50 10

- - → Views and Vistas

For more detail on heritage views and vistas refer to Conservation Management Plan (CMP)

Figure 2: Views and Vistas





Public Open Space

Bushland

Little Bay Geological Site -Critical Exposure Area





Significant Trees to be Retained

Heritage Trees

Relocated Heritage Trees


For more detail on heritage trees and relocated heritage trees refer to Conservation Management Plan (CMP)




Key Indicative Private Open Space Refer to precinct plans



December 2004

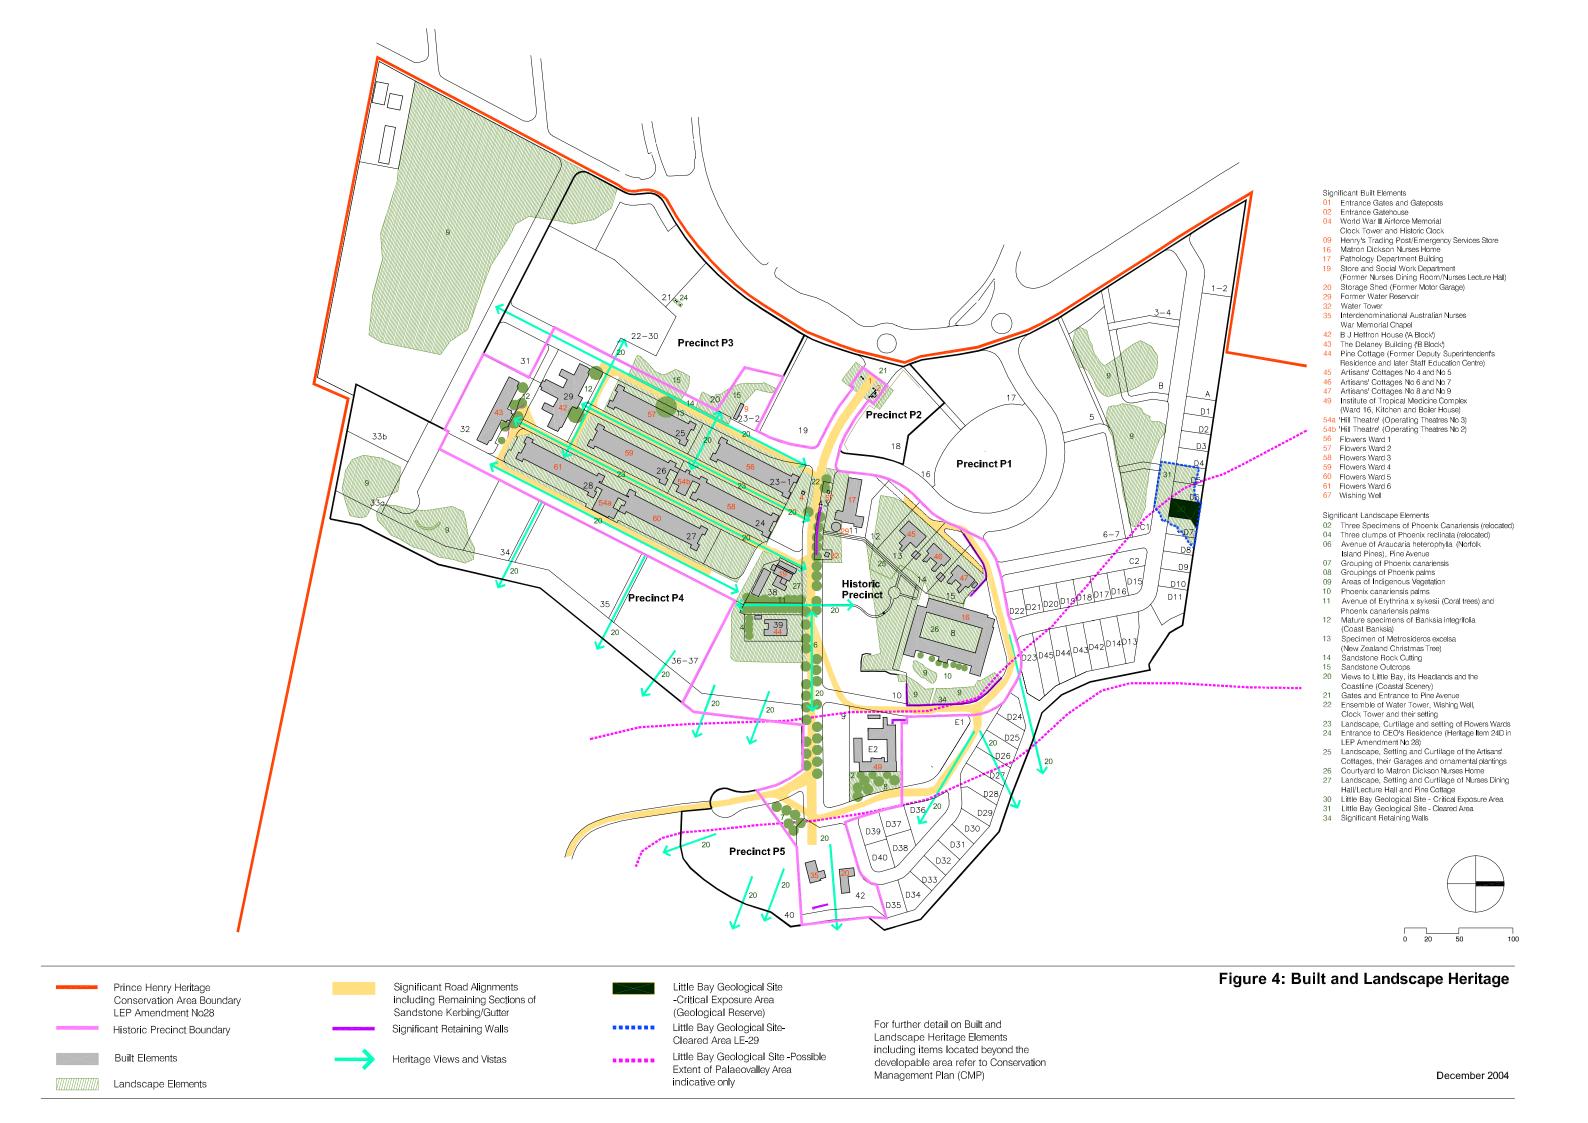

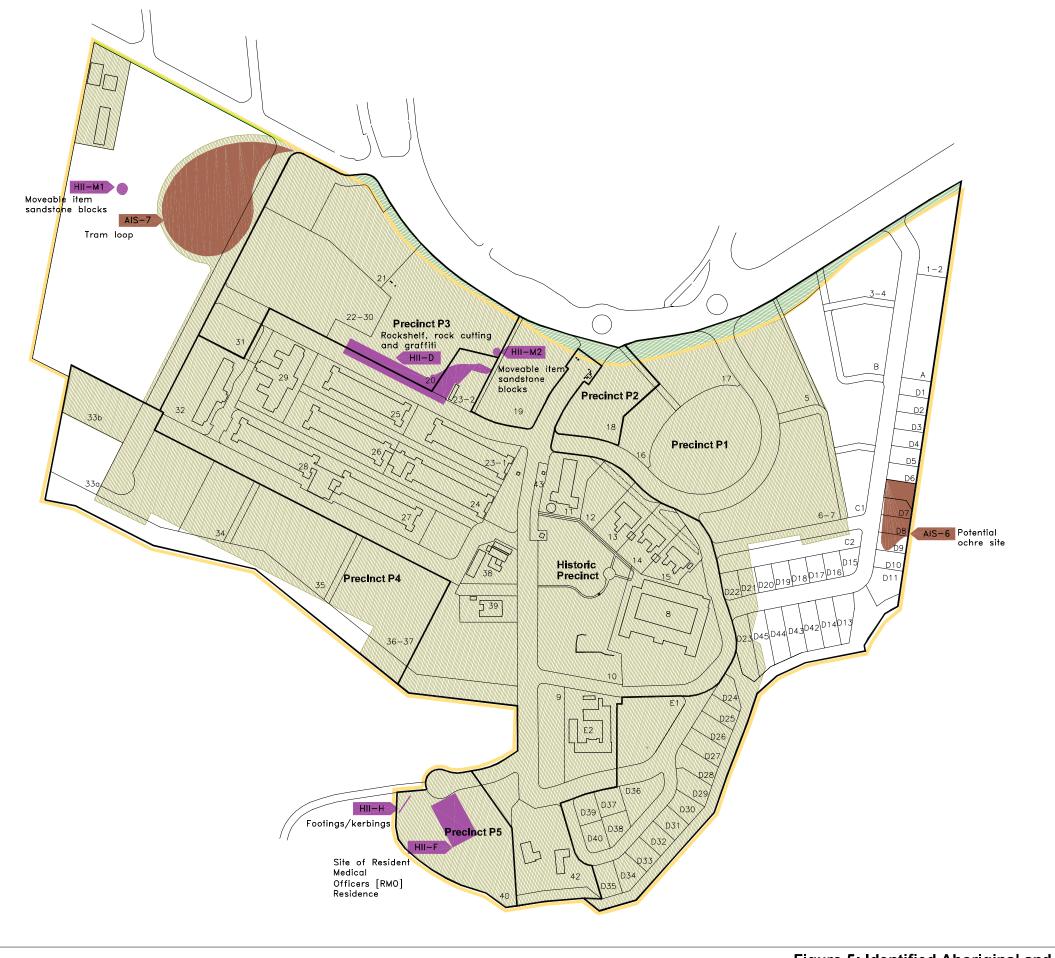

Extent of Aboriginal Archaeological Sensitivity Zones

Extent of Historical Archaeological Zones

Proposed Extension of Aboriginal and Historical Archaeological Zones




Aboriginal Identified Site

Historical Identified Item

For full extent of aboriginal and historical archaeological items including items located beyond the developable area, refer to Archaeological Management Plan (AMP).

Figure 5: Identified Aboriginal and Historical Archaeology

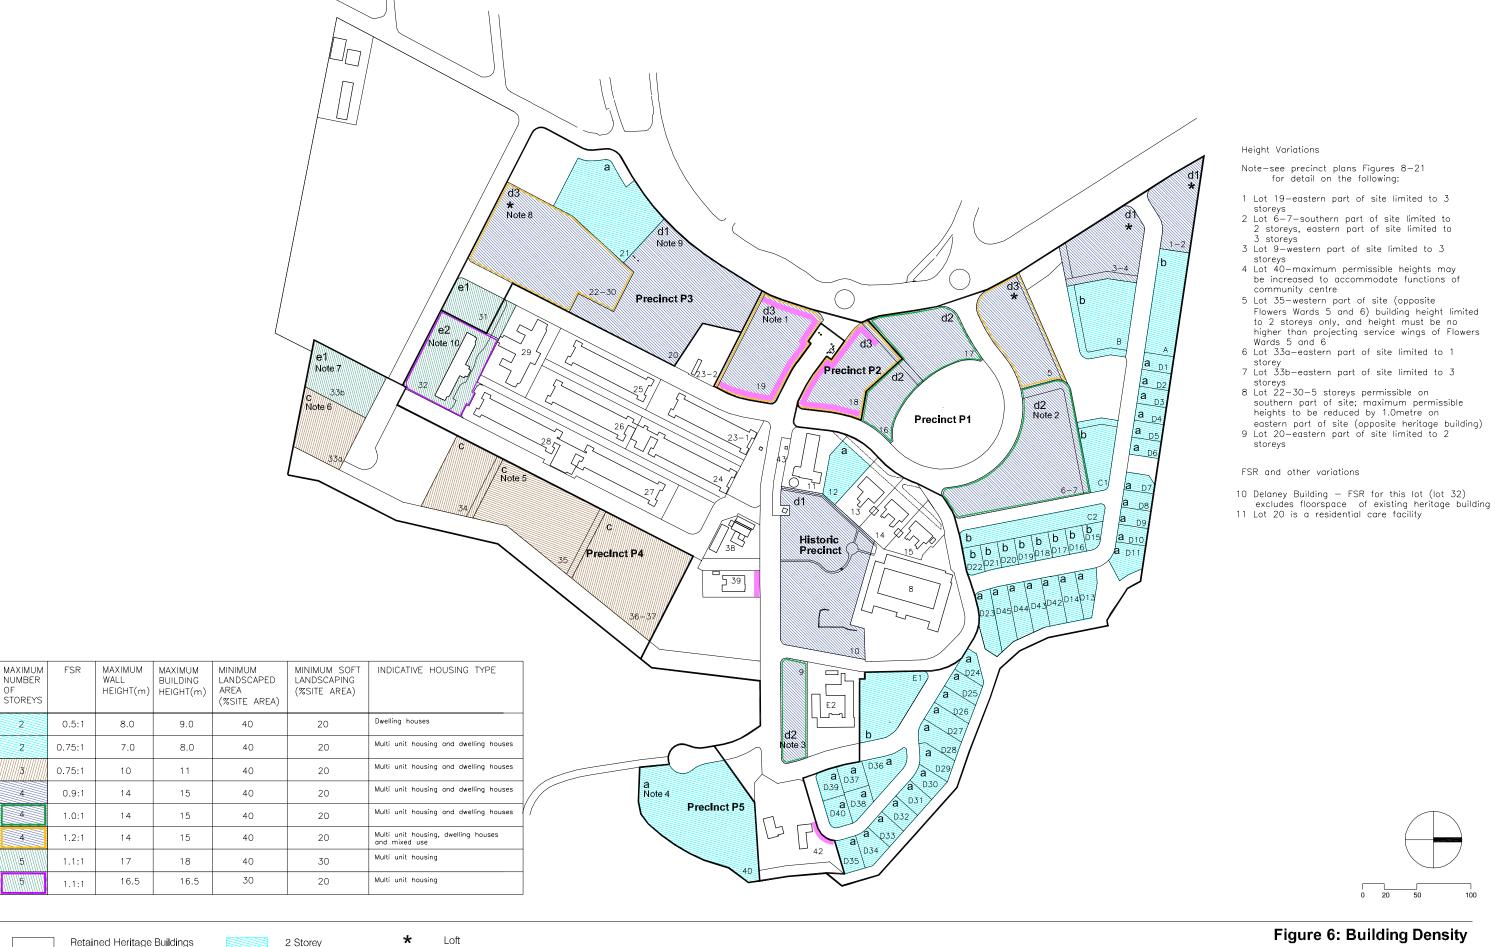



Retained Heritage Buildings limited to existing envelope subject to Specific Element Conservation Policy (SECP) for each building

> For more detail on retained built items refer to SECP for each built item

3 Storey 4 Storey 5 Storey Activity Strip

Figure 6: Building Density

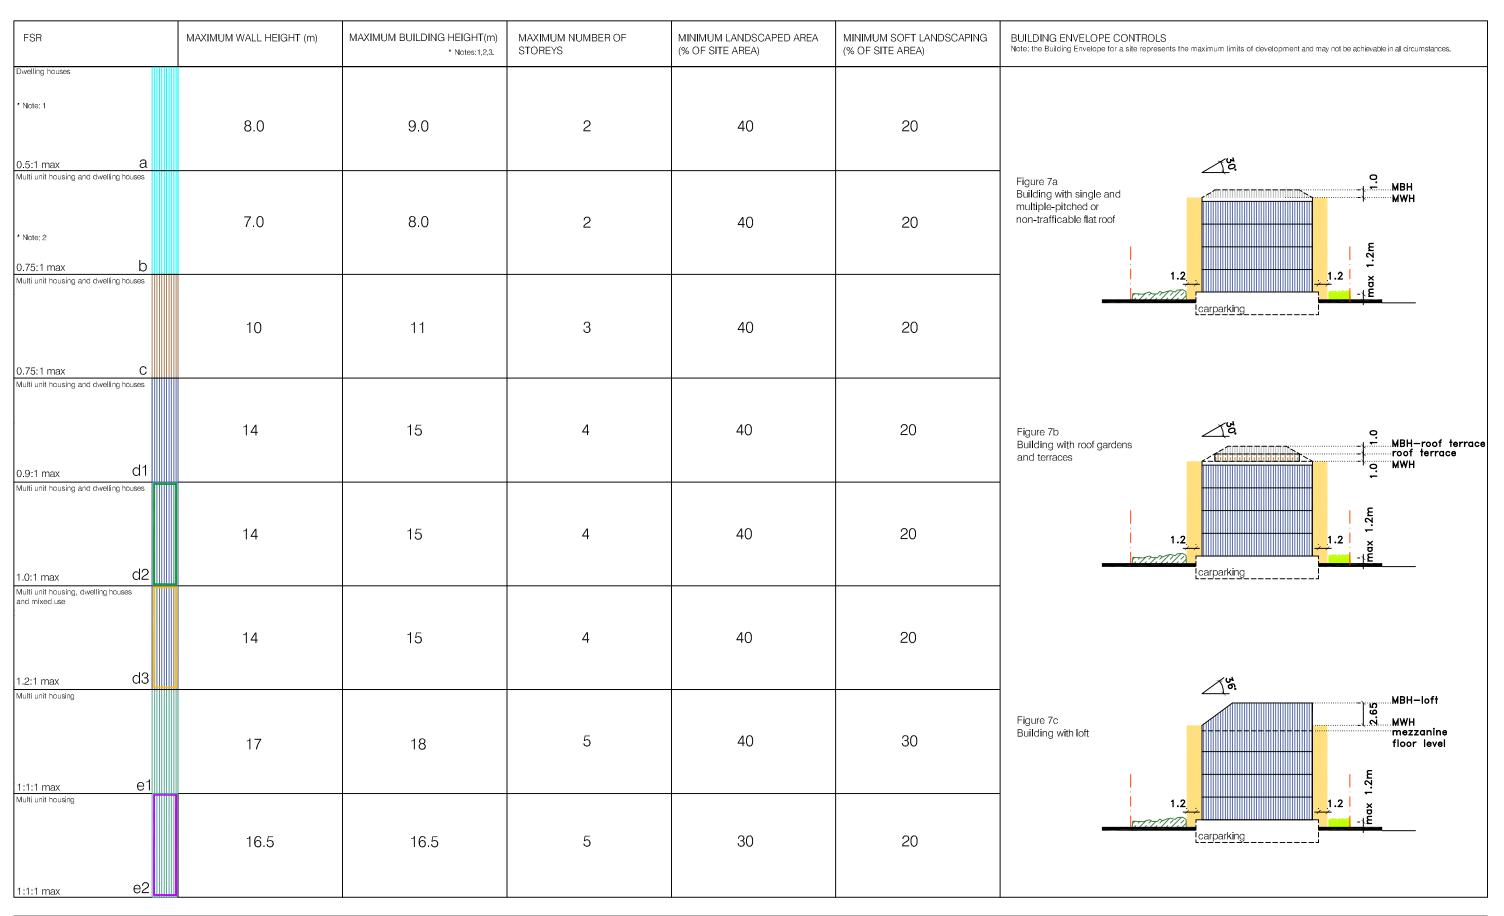



Roof projection zone to accommodate pitched roof forms and maximum 15 % fill by lift and stair shafts, roof mounted equipment and structures

Maximum Wall Height Maximum Building Height

MWH

MBH

Note:

 Lot 40 - maximum permissible heights may be increased to accommodate functions of community centre 2.An additional height of 1.0 metre is permitted to accommodate roof terraces except on lots 6-7(2+3 storey portions), 9,10,32,34-37,E1
See Figure 7b
An additional height of 1.65 metres is permitted to accommodate lofts on identified sites only. See Figure 7c

3. The roof projection zone established by the maximum wall height, inclined plane and maxiumum building height may be filled by pitched roof forms, roof gardens and terraces and to a maximum of 15 % by lift and stair shafts, roof mounted equipment and structures

Figure 7: Built Form Controls



3.0 SUBDIVISION AND AMALGAMATION

Explanation

Amalgamation is the combination of two or more lots. Subdivision is the division of land into blocks and/or lots for the purpose of redevelopment. Block and lot size and orientation influence possible building types. Topography, other natural features, and significant built and landscape elements also influence amalgamation and subdivision.

Objectives

- To provide a range and mix of lot sizes with areas and dimensions suitable for the permitted land uses and a variety of building types.
- To enable lot sizes that facilitate housing diversity and choice.
- To promote and facilitate ecologically sustainable development and micro climate management by providing lots that are appropriately oriented.
- To ensure that all lots have a primary street frontage.
- To arrange lots in a manner that facilitates personal and property safety and security.
- To ensure lots have total areas and dimensions that allow dwellings, ancillary buildings, private outdoor open space, landscaped areas, and vehicle access and parking to be located and constructed appropriately, and significant built and landscape elements to be retained within an appropriate setting.

Performance Criteria and Controls

- i Lots with direct vehicle access to car parking areas from a public road are to have a minimum width of 9 metres (this control does not apply if parking access is not on the primary street frontage).
- ii All lots are to provide frontages oriented to streets and public open spaces to provide a clear address so that personal and property security, deterrence of crime and vandalism, and surveillance of footpaths and public open space is facilitated.
- iii Lots are to be oriented so that dwellings can take advantage of micro climatic benefits and can have dimensions that allow adequate on-site solar access and access to breezes.
- iV Lots are to be designed to maximise efficiency in house design and useable external areas by having a regular shape.



4.0 BUILDING AND SITE DESIGN

This part of the DCP contains objectives and performance criteria and controls for building and site design. These objectives and performance criteria and controls apply to *all* development on the Prince Henry site.

Building height, density (FSR) and landscaped area requirements are contained in LEP Amendment No. 28 and are also set out in the **Built Form Control Table**. These requirements are explained in more detail in the following sections.

Other requirements in this part include setbacks, building articulation, privacy, dwelling layout and mix, safety, and materials.

Part 7 contains detailed objectives and performance criteria and controls that apply to specific precincts within the site, in addition to the general requirements contained in the rest of the DCP.

4.1 Building Envelope

Explanation

The building envelope defines the maximum extent of a building in terms of its height, length and depth. Buildings are to be designed to fit *within* the maximum applicable building envelope. The proportion of a building envelope that a building can occupy is detailed in the building density controls in **Section 4.3**.

The building envelopes shown in this DCP illustrate the absolute maximum envelope allowed on a site, within which all other criteria in this DCP must also be satisfied. Maximum building envelopes may not always be able to be achieved as requirements such as minimum landscaped area, solar access, overshadowing, and other individual site constraints may reduce the building envelope.

Where there is inconsistency between building envelope and minimum landscaped area requirements, minimum landscaped area requirements prevail.

The buildings envelopes vary across the Prince Henry site. These envelopes have been designed in response to topography, heritage items, landscape elements, street pattern and width, all of which vary across the site.

Objectives

- To provide a built form that respects the site's characteristics and its neighbours including existing significant heritage items and the natural environment
- To ensure that the distribution of built form responds to the site topography, attributes, and heritage significance.
- To define building bulk, height and scale of development across the site.
- To ensure building scale is suited to the scale of the street.

Performance Criteria and Controls

 New buildings must comply with the requirements in the Built Form Control Table (Figures 6-7, Part 2) and the building envelopes indicated in the Precinct Controls in Part 7.

Refer to **Part 7** of this DCP for the specific building envelopes for each precinct within the site.

Refer to **Section 4.7**Landscaped Area and Private
Open Space for landscape
requirements.



Under Local Environmental Plan 1998 (Amendment No. 28):

ground level means the ground level that exists after completion of the initial redevelopment earthworks and recontouring of the site as determined by that development consent issued for the land

wall height means the vertical distance from the highest point on an external wall to the ground level of that site. Each external wall height measurement must include gable ends and attic walls with an area of 6m² and dormer windows that protrude horizontally from the roof more than 2.5 metres.

4.2 Height

Explanation

Building height is an important control in terms of bulk and scale of development. It is a key factor in determining the character of a locality as well as the scale and bulk of development that occurs in that locality. Building height also has a major impact on the degree of overshadowing and potential loss of privacy and views.

Building heights on the Prince Henry site generally decrease in scale towards the coast, in response to site topography, and to encourage views from both public and private viewpoints. Heights also vary across the site to respect the scale of existing heritage items.

The maximum building heights (in both metres and number of storeys) are shown on Figures 6 and 7 in **Part 2**. More detailed height requirements for each precinct are contained in **Part 7** of this DCP.

In some cases where there are potential view loss or overshadowing impacts, the maximum building heights may not be able to be achieved. It is important that each site analysis correctly identifies these issues, and demonstrates how they are addressed by the proposed building design.

Objectives

- To ensure building height relates to the context of the building, including street type, surrounding buildings, heritage items, landscape, and views.
- To minimise the impact of development on heritage items and remnant bushland by providing for appropriate building heights in adjacent areas.
- To ensure reasonable daylight and solar access to all development and the public domain.

Performance Criteria and Controls

- The external wall height of a building must not exceed the maximum wall height for that lot indicated in the **Built Form Control Table** (Figures 6-7, **Part 2**).
- The number of storeys in any building must not exceed the number of storeys indicated in the relevant Precinct Control diagram in Part 7 of this DCP.
- iii. A minimum floor to ceiling height of 2.7 metres is required for all habitable rooms in new buildings and the extension to the Delaney Building (existing heritage buildings are excluded). Minimum floor to ceiling height of 3 metres is to be provided for the ground and first floor levels of buildings on Lots 18 and 19 (neighbourhood centre, mixed use development).
- iV. Where fill is required, it must not be introduced to artificially elevate (or excavate) the site for other than essential recontouring to establish suitable grades for access, landscape, infrastructure/services and drainage.



4.3 Building Depth

Explanation

Building depth is the horizontal cross section dimension of a building. It generally refers to the dimension measured from front to back (from the street side to the inside of the block).

The depth of a building will have a significant impact on the amenity of the building for its occupants. Buildings with slim floor plans and dual aspect apartments provide better sunlight and daylight access and natural ventilation than deep floor plans or single aspect apartments.

Part 7 contains building depths on a precinct by precinct basis. The maximum building depths set out in this part of the DCP have been designed in response to site conditions.

Objectives

- To ensure that the bulk of the development is in scale with its surrounds.
- To encourage dual aspect apartments with good amenity in terms of sun access and natural ventilation.

Performance Controls and Criteria

- Building depth is to be consistent with the requirements specified in Part 7

 Precinct Controls of this DCP
- ii. In multi unit housing, building depths must provide for dual aspect apartments, allowing optimal natural ventilation of apartments.

4.4 Density

Explanation

Building density is defined by maximum floor space ratio (FSR). The maximum allowable FSR varies across the site, in response to site topography, potential views, preferred building types, and relationship to heritage buildings and open space.

The FSR control works in conjunction with the building height, building depth and landscaped area controls. The achievement of maximum FSR is dependant on how the proposed development meets the objectives and performance requirements of this DCP.

In some instances it may not be possible to achieve the maximum allowable FSR for a particular site, due to potential impacts on views, overshadowing, and minimum landscaped area requirements, and other design considerations.

Objectives

- To control the bulk and scale of development.
- To ensure building bulk is compatible with the surrounding built form and minimise the impact of building bulk on existing buildings in the locality, open spaces and streetscape.
- To encourage a mix of dwelling sizes and types.

Performance Criteria and Controls

 The maximum floor space ratio for a building must not exceed the floor space ratio indicated for that DCP Lot in the **Built Form Control Table** (Figures 6-7, **Part 2**).

<u>Note</u>: Where there is any inconsistency between maximum allowable FSR and minimum landscaped area requirements, the minimum landscaped area requirements prevail.



4.5 Setbacks

Explanation

Setbacks contribute to the landscape character, visual and acoustic privacy, solar access and amenity of an area. They help create the proportions and continuity of the street. Street setbacks can enhance the setting of a building, by providing space for landscaping and allowing views between buildings.

Building setback is measured from the property boundary to any part of a building.

Objectives

- To minimise the impact of development on adjoining land and to ensure adequate separation between buildings.
- To provide strong street edges in the activity strips
- To provide adequate space for landscaping, visual and acoustic privacy, and solar access.
- To encourage the retention of significant views.

Performance Criteria

- Building setbacks must comply with the setbacks contained in the precinct controls in Part 7.
- ii. New buildings are to be sited so that they maintain significant views as identified in **Part 2** and to maintain an open landscape setting.
- iii. New buildings are to be sited and designed to form a strong, predominantly continuous built edge to the primary street frontage and public parks and pathways. Where an allotment has frontage to two or more streets (or vehicular thoroughfares), the primary street frontage is the widest, public street adjoining that allotment. Where an allotment has frontage to a street and public park or pathway, a strong, built edge is to be provided to both/all.

4.6 Building Articulation

Explanation

Articulation of building facades provides for interesting buildings and streetscapes, and greater amenity for occupants. It also assists in breaking up building mass.

Buildings can be articulated through the use of architectural elements such as balconies, entries, bay windows, sun shading devices, privacy screens and similar architectural elements.

Objectives

- To promote building facades that make a positive contribution to the design character of the street.
- To promote high quality architectural design.
- To promote integration of buildings and private open space.



Performance Criteria

- Building articulation is to be consistent with the articulation areas identified in the precinct specific controls in Part 7.
- Building articulation must not extend forward of the identified building articulation area.
- iii. Building articulation should respond to the environmental conditions of the site including orientation, breezes and privacy.
- iv. The maximum unarticulated building length is 9 metres along the primary street frontage and 10 metres along the secondary street frontages.
- Buildings are to be aligned predominantly parallel to the street and provide a clear street address.
- vi. Building entries are to address the primary street frontage and should form an integral part of the façade.
- vii. All facades, including rear facades, must include windows.
- viii. Multi unit developments must provide street entrances to at least 50% of the units that face the street or public open space.
- ix. A minimum of 30% and a maximum of 60% of the building articulation area for the building may be used.
- x. Up to 30% of the building articulation of any floor on any façade may comprise lifts, stairwells and associated lobby space.
- xi. Up to 20% of the articulation of any floor on any façade may comprise glazed stairwells and lobby space in order to allow such vertical elements to establish the major rhythm of façade compositions and to function as lanterns along the streets at night.
- xii. Large areas of glazing should be modulated by louvres, fins or the like.
- xiii. Windows and other glazing must be set back from the structure by a minimum of 80mm.
- xiv. Predominantly clear glazed shopfronts are to be provided to ground floor local shops.
- xv. Grilles and transparent security shutters are to have a minimum of 70% transparency and are to comply with Building Code of Australia (BCA) requirements. Solid roller shutters, screens or grills on shopfronts and dwellings are not appropriate.

4.7 Landscaped Area and Private Open Space

Explanation

This section contains the landscaped area requirements, minimum private open space dimensions (including balconies), and the location of private spaces.

Landscaped area includes communal (in the case of multi unit housing), and private open space. Private open space is an important part of urban living. Landscaped area requirements ensure spaces between buildings. Generous landscaped areas should be provided between buildings to retain the Prince Henry site's original character of buildings in a strong, open landscaped setting. The landscape area requirements ensure that this character is carried through to new development on the site, as well as ensuring private open spaces are adequate in size and provide amenity for residents.

It is also important to ensure that private and communal open spaces are sustainable in design. **Section 4.5** contains requirements to ensure development incorporates sustainable landscape design and irrigation practices.

Objectives

 To locate buildings so that the provision and use of outdoor areas is maximised;



A Landscape Plan, prepared by a suitably qualified professional, must be submitted as part of any DA.

Refer to **Section 4.8** for landscape design and requirements.

- To provide adequate space for landscaping, visual and acoustic privacy, sunlight penetration and private open space;
- To ensure that all residents have access to useable and well designed private open space;
- To ensure that new landscaping does not visually dominate significant built and landscape heritage items, or obscure key views.

Performance Criteria and Controls

a) General Requirements

- A Landscape Plan, prepared by a suitably qualified professional, must be submitted as part of any development application.
- Landscaped area on each site must not be less than the minimum percentage indicated in the **Built Form Control table** (Figures 6-7, **Part 2**).

<u>Note</u>: where there is any inconsistency between minimum landscape area and the maximum FSR requirements, the minimum landscape area requirements prevail.

- iii. Soft landscaped area on each site must not be less than the minimum percentage indicated in the **Built Form Control table** (Figures 6-7, **Part 2**).
- iv. At least two-thirds of the area occupied by external car parks, driveways, courtyards, pathways and the like are to be laid with porous paving. Areas above underground parking and driveway ramps steeper than 1 in 10 are excluded from the calculation for this requirement.

b) Detached, Terrace and Courtyard Housing:

- i. Detached dwellings are to have a minimum contiguous private open space area of 60m² and terrace and courtyard houses are to have a minimum contiguous private open space area of 45m².
- ii. The minimum dimension of private open space for detached, terrace and courtyard houses is 4m and the maximum gradient permitted is 1 in 10.
- iii. The private open space areas should be directly accessible from a living area and preferably be north facing.

c) Apartments:

- Each apartment should have at least one balcony or courtyard area directly accessible from the living area of the dwelling.
- ii. The minimum balcony depth for new buildings must be 2.4m.
- iii. The minimum area for the main balcony (for apartments) is as follows:

Dwelling size	Minimum balcony/courtyard size/area
Up to 60m ²	10m ²
More than 60m ²	12m ²

- iv. The main balcony must:
- be located adjacent to the principal living area;
- be sufficiently large and well proportioned to promote indoor/outdoor living;
- be able to accommodate a dining table and chairs;
- include sun screens, pergolas, shutters, operable walls, where appropriate;
- improve visual privacy and allow casual surveillance over the street, where applicable.



- Balconies should be north facing where possible.
- vi. Additional balconies may be provided, including Juliet and French balconies.
- vii. Balconies must not be so deep that they stop sunlight entering the lower apartments in a building.
- viii. Continuous wrap-around balconies are not appropriate.
- ix. For the adaptive re-use of heritage buildings for residential development, applicants should refer to the Conservation Management Plan (CMP) and the relevant Specific Elements Conservation Policy (SECP) for guidance on the provision of private open space for these dwellings.

4.8 Landscape Design and Biodiversity

Ensure Landscape Plans demonstrate how the proposed design responds to microclimate and addresses the requirements in this section and Section 4.7 Landscaped Area and Open Space.

Explanation

Landscape design and practices play an important role in designing for microclimate, the efficiency of water consumption and infiltration, protecting and conserving plant species, and providing habitat. Landscaping should be designed to serve multiple functions and should be an integral part of site design.

The use of local native plant species is encouraged as they require less water and are suited to the coastal microclimate of the Prince Henry site. Irrigation practices can also be made more water efficient, for example, by connecting the irrigation system to rainwater storage facilities or by using a drip irrigation system rather than sprinklers.

Permeable surfaces are an important way of reducing the impact that development has on natural water flows and processes. These surfaces include garden areas, lawn, gravel and semi porous paving.

Biodiversity refers to protecting and conserving the biological diversity of species, as well as the diversity of species within ecological communities.

There are a number of landscape elements on the site of heritage significance (refer to **Part 2**). In certain areas of the Prince Henry site, it is important that new landscaping design does not detract from the heritage significance of these landscape elements.

Objectives

- To promote sustainable landscape design and irrigation practices
- To ensure landscape design takes into account the site's microclimate
- To protect, improve and enhance the natural environment of the site, including remnant native vegetation, biological links between remnants and buffer areas.
- To regenerate and conserve the local threatened ecological communities.
- To provide landscape design consistent with any relevant Specific Elements Conservation Policy (SECP).

Performance Criteria and Controls

- i. Landscaping must include a predominance of:
 - native plant species (refer to Appendix A for appropriate species);
 - species that are drought resistant, and require minimal watering once established, or species with water needs that match rainfall and drainage conditions;
 - water conserving landscape practices/designs, including plant selection, mulching, hydro zoning and multi storey planting;
 - native ground covers and grasses in garden beds and path surrounds (turf is to be confined to useable outdoor areas)



- where applicable, landscaping must be consistent with any relevant Specific Elements Conservation Policy (SECP) or Plan of Management (POM).
 - **Landscape plans** are to demonstrate how and where these species/features have been incorporated in to the landscape design.
- ii. Landscape plans are to demonstrate how the proposed design responds to the site's microclimate to ensure that species survive and provide protection from wind and sun.
- iii. A minimum of one large tree of sufficient height and canopy spread at maturity to effectively screen or soften buildings or other structures must be provided on each dwelling house site, and clearly marked on the Landscape Plan submitted with the DA. Additional large trees are to be provided where multi unit housing is proposed.
- iv. Trees and shrubs are to be selected and positioned to maximise solar penetration in winter and minimise it in summer (e.g. deciduous plants on the north side of private open space).
- Pergolas and awnings should be located to shade external areas and control sunlight into buildings.
- vi. Landscape areas are to be contoured to encourage stormwater runoff to infiltrate to ground.
- vii. Garden irrigation and watering systems are to be connected to rainwater storage facilities, where applicable.
- viii. Avoid planting that may obscure building entries or the surveillance of the street and pedestrian paths.
- ix. Minimise the impact of driveways through materials selection and appropriate screen planting.
- x. Garden structures such as gazebos, clothes lines, play equipment, swimming pools, and spa baths, are not permitted in front gardens. These structures and paved areas must be sited to avoid damage to existing trees and their root systems.
- xi. Landscaped areas must include an area dedicated to on-site composting of a size relevant to the number of dwellings and the landscaped area it serves.

4.9 Development Adjacent to Watercourses

Explanation

Four watercourses have been mapped on the Prince Henry site, see figure AA. Inappropriate development in, on, or adjacent to these watercourses will be detrimental to its ecological function.

Clause 42D of Randwick Local Environmental Plan recognises the important role watercourses and wetlands play and seeks "to ensure that a mapped watercourse and or wetland and its riparian land is identified and preserved, with degraded areas rehabilitated to natural conditions as far as possible."

Objectives

- To ensure appropriate measures have been identified for ongoing protection, conservation and management to enhance the watercourse or wetland and its riparian land over time
- To ensure riparian land width maximises and enhances its potential as a habitat corridor
- To ensure riparian land width retains and incorporates within it, wherever possible, existing areas of remnant native vegetation, and
- To ensure the provision of public access is to be located and designed to minimise disturbance of the habitat corridor and existing native vegetation



Activity strips are marked on Randwick LEP 1998 Amendment No. 28 and Figure 6 of this DCP.

Development applications for a supermarket are to be supported by an **economic analysis**.

Performance Criteria and Controls

- Landscape plans are to demonstrate how the above objectives have been incorporated into the landscape design
- ii. Riparian land widths are to be provided in accordance with AppendixE.

4.10 Activity Strip

Explanation

An activity strip allows for non-residential uses permitted by the LEP, such as neighbourhood business premises, local shops, a medical centre or restaurants within certain locations marked with an activity strip.

LEP Amendment No. 28 identifies activity strips within the Prince Henry site (also marked on **Figure 6** in this DCP), and permits these non-residential uses on ground and first floor in identified locations.

Objectives

- To enable certain non-residential uses permitted by the LEP, such as neighbourhood business premises, local shops, medical centre or restaurants, on land marked as an activity strip within Figure 6;
- To encourage neighbourhood convenience type retail use with active frontages
- To ensure non residential use of land does not have an adverse effect on residential amenity
- To provide for local scale businesses and services only, which primarily serve the local community

Performance Criteria and Controls

- i. The non-residential use of a building is limited to the ground and first floor areas of a building on a site marked with an activity strip on **Figure 6**.
- ii. The first and ground floors in the Precinct P2 activity strip are to have minimum floor to ceiling heights of 3 metres.
- iii. In the Precinct P2 activity strip, buildings are to present active frontages to the street or pedestrian path at ground floor level. Blank and unarticulated facades are not to be provided to street and pedestrian frontages.
- iv. A small to medium size supermarket (between 1,500m² 2,500m²) may be permitted within Precinct P2 subject to:
 - supporting economic analysis which, at minimum, addresses the sustainability of the proposed supermarket size in relation to economic feasibility and impact on other nearby centres, and measures to integrate this proposed development with the existing 3B Local Business land opposite the Prince Henry site on the western side of Anzac Parade;
 - the provision of active facades to all street and pedestrian path frontages (ie where an activity strip is identified in Figure 6) within Precinct P2:
 - the design consistent with all heritage and other objectives and design principles set out in Section 2 of this DCP.
- v. Awnings over a public footway are to be:
 - a minimum clear height of 3 metres above the footpath
 - a depth of 2 metres where non-residential uses adjoin
 - not less than 600mm from the edge of the road/kerb.
- vi. Any outdoor seating is to be in accordance with Randwick City Council's Footpath Dining and Trading DCP.
- vii. Advertising signs are to be in accordance with the performance criteria and controls in **Section 4.19** of this DCP.



Refer to **Part 5** for water and energy conservation requirements.

4.11 Solar Access

Explanation

Solar access forms an integral part of the design process. Buildings should be sited and designed to provide adequate daylight and sunlight access to habitable rooms and private and communal open space areas. Good solar design improves amenity and energy efficiency.

Objectives

- To ensure adequate access to sunlight is provided to adjoining properties and the public domain;
- To ensure reasonable solar access is provided to solar energy collectors
- To encourage passive solar design that minimises energy consumption
- To reduce the need for mechanical heating and cooling, and artificial lighting

Performance Criteria

- i. Shadow diagrams, including elevations showing shadow impacts on any walls (and windows) of adjoining development and any remnant bushland, must be submitted with the development application for all new buildings of two or more storeys. Any adverse overshadowing impact may require a reduction in the height of the proposed development.
- Dwelling orientation, siting, layout and landscaping are to ensure solar access to living areas and private open space, and maximise use of cooling breezes.
- iii. The principal living room/s of a new dwelling must be designed to achieve not less than three (3) hours of sunlight between 9am and 3pm on 21 June.
- iv. Residential re-use of existing heritage buildings should demonstrate that a reasonable level of solar access is provided, where it cannot meet the minimum requirements specified above.
- v. Sunlight access to at least 50% of the primary private and communal open space area of adjoining properties must be achieved for at least three (3) hours between 9am and 3pm on 21 June.
- vi. The development is to maximise north facing roofs on new buildings. The roof areas shall be of an appropriate size, orientation and pitch, suitable for the installation of solar collectors.



This section should be read in conjunction with **Section 4.13** visual privacy, for performance criteria and controls for dwelling houses.

4.12 Acoustic Privacy

Explanation

Acoustic privacy is a measure of sound insulation between dwellings and between external and internal spaces. Acoustic privacy is particularly important for the amenity of apartments in multi unit housing and mixed use developments. Designing for acoustic privacy relates to the location and separation of buildings and the arrangement of apartments and internal spaces within apartments.

Objectives

- To ensure a high level of amenity by protecting the privacy of residential dwellings within multi unit housing both within the apartments and in private open spaces.
- To ensure that dwellings close to noise sources such as roads are sited and designed to provide a comfortable living and sleeping environment.

Performance Criteria and Controls

- A noise and vibration assessment report is to be submitted with development applications involving multi unit housing, addressing appropriate measures to minimise potential noise and vibration impacts for any proposed development. This assessment is to:
 - be prepared having regard to the NSW Environmental Protection Authorities Industrial Noise Policy, Chapter 174 of the NSW Environmental Protection Authorities Noise Control Manual (or relevant update) and relevant Australian Standards;
 - incorporate external noise sources (such as traffic, plant & equipment) and internal noise sources (such as mechanical ventilation);
 - specify if the findings and recommendations can be achieved and demonstrate how such can be achieved.
- All multi unit housing development is to be constructed so as to achieve the following internal acoustic amenity criteria, when tested in accordance with Australian Standard AS2107: 2000;
 - In naturally ventilated residential units; the repeatable maximum L_{Aeq} (1hour) should not exceed:
 - 35 dB(A) between 10.00 pm and 7.00 am in sleeping areas when the windows are closed:
 - 45 dB(A) in sleeping areas when windows are open (24 hours):
 - 45 dB(A) in living areas (24 hours) when the windows are closed, and
 - 55 dB(A) in living areas (24 hours) when the windows are open
 - Where natural ventilation cannot be achieved, in residential units provided with mechanical ventilation, air conditioning or other complying means of ventilation (in accordance with the ventilation requirements of the Building Code Of Australia), when doors and windows are shut, the repeatable maximum L_{Aeq (1hour)} should not exceed:
 - 38 dB(A) between 10.00 pm and 7.00 am in sleeping areas;
 - 46 dB(A) in living areas (24 hours);
 - 45 dB(A) in sleeping areas between 7.00 am and 10.00 pm



- iii. The site and building layout are to maximise acoustic privacy by providing adequate building separation within the development and from neighbouring buildings. All development should comply with **Section 4.5** Setbacks.
- iv. Developments are to be designed to minimise noise transition between apartments by:
 - locating busy, noisy areas next to each other and quieter areas next to other quiet areas, for example, living rooms next to living rooms, bedrooms with bedrooms
 - using storage or circulation zones within the apartment to buffer noise from adjacent apartments, mechanical services or corridors and lobby areas
 - minimising the amount of party (shared) walls with other apartments.
- v. Noise transmission is to be reduced from common corridors or outside the building by providing seals at entry doors.
- vi. Any conflicts between noise, outlook and views are to be resolved using design measures such as operable screening and the like.
- vii. Comply with BCA requirements for acoustic control of airborne noise and impact of noise between apartments.

4.13 Visual Privacy

Explanation

Visual privacy plays a significant role in the perceived level of enjoyment of living in an urban environment. It is important to ensure residents have a reasonable level of privacy without compromising views, outlook, ventilation or solar access. Visual privacy is influenced by topography, site configuration, scale of the proposed development, dwelling layout and relationship to adjoining development.

Objectives

- To maximise outlook and views from habitable rooms and private open spaces without compromising visual privacy.
- To ensure that new development respects the existing level of privacy of adjoining and nearby properties and minimises adverse privacy impacts.

Performance Criteria

- i. Direct overlooking of main internal living areas and private open spaces of other dwellings is to be minimised by building layout, location and design of windows and balconies, screening devices, landscape elements or remoteness. Effectively locating windows and balconies to avoid overlooking is preferred to screening devices, high sills or obscured glass. Where these are used, they should be integrated with the building design and have minimal impact on residents' or neighbours' amenity.
- ii. Habitable room windows with a direct outlook to the habitable room windows of any floor above ground floor in an adjacent dwelling within 12m;
 - are to be offset from the edge of one window to the edge of the other by a distance sufficient to limit views into the adjacent windows;
 - have an appropriate permanent privacy screening;

25



- have sill heights of 1.6m above floor level; or
- have fixed obscure glazing in any part of the window below 1.6m above floor level.
- iii. The outlook from windows, balconies, stairs, landings, terraces and decks or other private or communal areas within a development is to be screened where a direct view is available into the private open space of an existing or other proposed dwelling. If screening is used, site lines are to be provided in development application plans and sections to demonstrate its effectiveness.

No screening is required where:

- windows are in bathrooms, toilets, laundries, storage rooms or other non-habitable rooms and they have translucent glazing or sill heights of at least 1.6m
- windows are in habitable rooms and they have sill heights of 1.6m or more above floor level or translucent glazing to any part of a window less that 1.6m above floor level
- iv. Windows and balconies of an upper-level dwelling are to be designed to prevent overlooking of more than 50% of the private open space of a lower-level dwelling directly below and within the same development.
- v. Direct views may be obscured by solid translucent screens, perforated panels, trellises or the like which have a maximum of 25% openings, and which are:
 - permanent and fixed;
 - of durable materials;
 - designed and painted or coloured to blend in with the development.

4.14 Dwelling Layout and Mix

Explanation

Dwelling layout has a significant influence on environmental sustainability and residential amenity. This is particularly important for apartments, and dwellings on small lots. An efficient layout should minimise circulation space and should allow flexible furniture arrangements.

A mix of housing and apartment types provides housing choice and accommodates a range of household types. This assists in integrating new development with the existing community.

Maximising opportunity for natural ventilation is an important part of building design. Building orientation, dwelling layout and external building facades are key elements in achieving optimal natural ventilation. Designing for natural ventilation enhances building sustainability by responding to the local climate and reducing the need for mechanical ventilation. The building envelopes in **Part 7** of this DCP have been designed to encourage dual aspect apartments (including cross-through and cross over apartments) through slim building depths.

Objectives

- To ensure dwelling layouts are efficient and provide high standards of residential amenity
- To maximise the environmental performance of apartments and dwellings.
- To provide a diversity of housing types which cater for different household requirements now and in the future.
- To encourage optimal natural ventilation through dual aspect apartments.
- To reduce energy consumption by minimising the need for mechanical ventilation, particularly air conditioning.



Performance Criteria and Controls

- Dwelling layouts are to respond to the natural environment and optimise site opportunities by:
 - locating primary open space adjacent to the main living area
 - orienting main living spaces towards the primary outlook and aspect
- ii. Dwelling layouts, and particularly apartments, are to maximise opportunities for natural ventilation and natural light, through the provision of corner apartments, cross-over or cross-through apartments, and split level or maisonette apartments.
- iii. Dwelling layouts must be designed to:
 - provide appropriate room size for their use
 - accommodate a variety of furniture arrangements
 - ensure efficient circulation
 - maximise natural ventilation
- Innovative technologies to naturally ventilate internal building areas or rooms such as bathroom, laundries and underground car parks are to be explored.
- v. The following minimum apartment sizes (internal area) apply:

Apartment type	Size
Studio	40m²
1 bedroom cross-through	50m ²
1 bedroom maisonette/loft	60m²
2 bedroom corner	80m²
2 bedroom cross-through	90m²
2 bedroom cross over	90m²
3 bedroom	125m²

<u>Note</u>: for each additional bedroom above 3 bedrooms, an additional 20m² is required.

- vi. In multi unit housing developments, a mix of 1, 2 and 3 or more bedroom apartments is to be provided.
- vii. Optimise safety and security of internal circulation by grouping apartments to a maximum of 10 around a common lobby. Council may consider a variation in the maximum number of apartments per floor where the applicant can demonstrate that a high level of amenity of the common lobby, corridors and apartments is achieved (for example through light wells).
- viii. Where apartments are arranged off a double loaded corridor, the number of units accessible from a single core/corridor is to be limited to 8.
- ix. Building layouts are to utilise multiple access cores to:
 - maximise the number of pedestrian entries along a street;
 - articulate the building façade; and
 - limit the number of units off a circulation core on a single level.
- x. Long corridors are to be articulated by a change in direction/width, using a series of foyer areas, and/or providing windows/lightwells along or at the end of the corridor.
- xi. The number of accessible and adaptable dwellings is to be optimised to cater for a wide range of occupants.



Refer to **5.1 Energy and Greenhouse** for roof design requirements for photovoltaics.

4.15 Roof Design

Explanation

Roof forms vary with building type and architectural style and can include hip, gable, flat and profiled roofs and articulated parapets. Roof design should consider the context of surrounding development and should add interest to the building.

Roof forms with low pitches and skillion roofs are encouraged on the Prince Henry site, to create a contemporary coastal character.

Objectives

- To encourage roof design which creates a distinctive silhouette to buildings, while minimising building height and bulk; and
- To encourage roof design which can accommodate open space and photovoltaic cells.

Performance Criteria

- i. Roof design should minimise bulk and overshadowing.
- Roof design must relate to the size and scale of proposed development.
 Domestic roof forms may not be appropriate on larger buildings.
- iii. The profile and silhouette of parapets, eaves and roof top elements must be considered in the roof design.
- Roof materials should respond to those of surrounding buildings and the identified precinct character.
- v. Roof terraces and roof gardens are encouraged where the privacy of adjoining properties can be maintained.
- vi. Trafficable flat roofs must be paved or finished with gravel ballasts. Large flat roof areas should not be covered with metal decking or exposed membrane roof systems.
- vii. Lightweight pergolas, sun screens, privacy screens and planters are permitted on the roof, provided they do not increase the bulk of the building and do not significantly affect the views enjoyed by neighbouring properties.
- viii. Roof top solar heating panels should be installed so as not to be visible from the street.
- ix. All new service elements such as aerials, vent pipes, hot water services, solar collectors, plant equipment, air-conditioning units, telecommunications and satellite equipment and the like are to be integrated into the design of the building and concealed from public view.
- x. Lift over-runs and service plant equipment must be contained within roof structures and within the maximum building height stipulated by the precinct controls
- xi. Where gable or hipped roofs are proposed, the angle of the pitch should be compatible with adjacent/nearby heritage buildings, and shall have a minimum pitch of 30° and a maximum pitch of 36°.
- xii. Eaves and overhangs must be provided to pitched roofs to maximise building performance and response to climatic conditions.
- xiii. Rooftop signs are not permitted.



Refer to Part 7 -Precinct Controls for fencing requirements along Anzac Parade.

4.16 Fences

Explanation

The design of fences has an impact on the amenity of the public domain and the real and perceived security of residents.

It is important that the type and style of fencing on the Prince Henry site is consistent with the principle of buildings in a landscape setting, and continuing the character of the existing heritage buildings on site. Large, blank spaces are to be avoided as they detract from the streetscape and reduce safety through decreased passive surveillance of the street.

For development within or adjacent to the Historic Precinct, Applicants should refer to the Conservation Management Plan (CMP) and any relevant Specific Elements Conservation Policy (SECP) for any special fencing style or material requirements.

Objectives

- To define the edges between public and private land
- To provide privacy and security
- To contribute positively to the public domain

Performance Criteria

- i. Solid front fences facing the street are to be no higher than 1.2 metres. For multi unit housing, this may be increased to 1.8m where the fence has openings that make it at least 50% transparent, provided that this does not adversely affect the setting of the heritage buildings and the open character of the site.
- ii. Side boundary fences are to have a maximum height of 1.8 metres.
- iii. Fencing should be integrated with the building and landscape design through the use of compatible materials and detailing.
- iv. Fencing should return to the building line on side boundaries.
- v. Sheet metal and wire fences are not appropriate.
- vi. Preferred materials include masonry, and steel palisade fencing (paint finish).
- vii. The use of landscaping to soften the appearance and articulate fences is encouraged.
- viii. Consistent low fencing, 700mm high, is to be provided along the Anzac Parade frontage of the site.
- ix. For multi unit housing, fencing with a maximum height of 1.5 metres may be used to separate communal open space from private open space (at ground level). Fencing is to be articulated, and is to incorporate landscaping where appropriate.



4.17 Safety and Security

Explanation

Safety and security refers to formal and informal measures that protect properties, residents and visitors. Developments should provide safe ground level entry and exit and enable casual surveillance.

Objectives

- To encourage building design that provides casual surveillance of streets and open space areas
- To provide a safe and secure living environment for residents and visitors
- To promote the design of buildings and open space areas which encourage community safety and reduce the opportunity for crime.

Performance Criteria

- A formal crime risk assessment, consistent with the Department of Infrastructure, Planning and Natural Resources' (DIPNR) Crime Prevention and the Assessment of Development Applications guidelines (or any update), is to be carried out for all residential developments of 20 or more new dwellings.
- ii. Buildings must be designed to enable occupants to overlook streets and public open spaces to provide casual surveillance. Opportunities for casual surveillance should be provided by:
 - orienting living areas so they have views over public or communal open spaces
 - providing clear lines of sight between building entrances and the street
 - footpaths, landscaped areas, and driveways must provide opportunities for surveillance and allow safe movement of residents around the site.
- iii. Opportunities for concealment are to be minimised by:
 - avoiding blind or dark alcoves near lifts and stairwells
 - providing well lit routes throughout the development
 - ensuring car parking areas, pathways, and common areas of multi unit housing developments are adequately lit at all times.
- iv. High walls and planting around residential buildings and parking areas, which could obstruct views into developments, are to be avoided.
- Entrances to dwellings and buildings must be clearly visible from the street.
- Community buildings and public open space areas are to be provided with sufficient lighting and security.
- vii. Dwellings that face the street must allow for casual surveillance of footpaths and driveways.
- viii. The demarcation between public, communal and private areas in a development is to be clearly recognisable.
- ix. Shared entries should serve a limited number of dwellings and be able to be locked.
- Large expanses of wall and fences which may attract graffiti are to be avoided.

A Crime Risk Assessment is to be provided for all residential developments of 20 or more new dwellings.

Refer to DIPNR's Crime Prevention and the Assessment of Development Applications guidelines.



4.18 Materials and Finishes

Explanation

The selection of materials and finishes for development on the Prince Henry site is important for a number of reasons. As the site occupies a prominent position on the coast and is exposed to extreme weather conditions, the selection of building materials and finishes will play an important part in the appearance and longevity of the development.

The selection of materials and colours used on site is also important because of the site's heritage significance. For development within and adjacent to the Historic Precinct, Applicants should refer to the Conservation Management Plan (CMP) and any relevant Specific Elements Conservation Policy (SECP) for any specific requirements for materials and finishes.

Materials and finishes selected should be consistent with the site's coast location, and should contribute to the coastal character of the site.

It is also important to consider environmental impacts of materials in terms of their whole life cycle (including their manufacture and disposal) when selecting construction and building materials, fittings, fixtures and appliances.

Objectives

- To select colours and materials that aesthetically relate to the coastal environment and respect the heritage significance of the site;
- To ensure building materials are chosen that can withstand climatic extremes; and
- To ensure that new buildings relate sympathetically to neighbouring significant heritage buildings.
- To encourage the use of recycled and environmentally responsible materials

Performance Criteria

- A sample board, showing colours and finishes is to be submitted with the development application.
- Face brickwork must be limited to smooth face bricks, which range in colour from the cream of the sand-lime bricks of the Flower Wards to the red of the Heffron Building.
- iii. Mottled and highly textured bricks are not appropriate.
- iv. Acceptable wall materials include natural stones, integrally coloured or painted render, face brickwork, timber, painted or coated sheet metals or composite panels, and naturally finished metals such as copper and zinc.
- v. Where sandstone is proposed as a wall material, a thickness of 75mm to 100mm is required. Adhesive fixing is not appropriate.
- vi. Acceptable roofing materials include sheet metal (zinc, copper, aluminium, colour-coated steel), terracotta tiles and slate. Acceptable colours for tiles and colour-coated metals are greys, neutral greens, and terracotta tones.
- vii. Materials that provide surface relief and articulation are encouraged.
- viii. Changes of colour and texture should be used to complement façade articulation
- ix. Applicants should refer to any relevant Specific Elements Conservation Policy (SECP) for any requirements for new development within or adjacent to the historic precinct (refer to Appendix F).



x. Consider a colour palette for new buildings which includes:

Walls:

- Neutral colours with low chroma values (such as colours similar to those of natural soils and stones and indigenous plant materials).
- Sandstone
- Greys
- Low to medium reflectance

Accent colours:

- Different colours may be used for trims on a limited number of elements, such as external articulation elements.
- White, black
- Bright, primary and secondary colours
- xi. Where floodlighting is proposed, it must not have any adverse impact on neighbouring properties, and must not provide an excessive upward component of light when mounted in a horizontal position.

4.19 Signs

Explanation

Appropriate signage is required for all uses to ensure the heritage significance of the site is retained and the desired future character is achieved.

Objectives

- To ensure signage on all buildings is consistent with the desired future character of the Prince Henry Site.
- To ensure signage respects the heritage significance of the Prince Henry Site.

Performance Criteria

- i. All signs are to comply with State Environmental Planning Policy No 64 (SEPP 64) Advertising and Signage, and Randwick City Council's Outdoor Advertising DCP (or any draft).
- ii. Location and/or space for future signs is to be detailed in DA plans and elevations.
- iii. Signage for retail, commercial and community group uses must be contained within the building envelope.
- iv. Roof signage is not appropriate.
- v. Commercial signage on local shops is to be limited to identification signs. These may be located on shop front windows, above entrances or suspended under colonnades or awnings, as per Randwick City Council's Outdoor Advertising DCP.



5.0 SUSTAINABLE DESIGN

This Part of the DCP provides ecologically sustainable guidelines for development on the Prince Henry site. The United Nations World Commission on Environment and Development Report, *Our Common Future*, defines ecologically sustainable development (ESD) as "development that meets the needs of the present without compromising the ability of future generations to meet their own needs".

This part of the DCP includes sections on energy and greenhouse, total water cycle management, waste management and minimisation, and environmental education.

Section 5.3 explains the new *State Environmental Planning Policy (Building Sustainability Index: BASIX) 2004 (BASIX SEPP)* and its implications for development.

5.1 Energy and Greenhouse

Explanation

Energy refers to the use and conservation of non-renewable energy resources. Greenhouse refers to the greenhouse gas emissions associated with the use of energy.

This section currently applies to all development within the Prince Henry site, except for dwelling houses. Energy and water conservation requirements for single dwellings are contained in **Section 5.3** of this DCP.

Objectives

- To minimise the demand on non-renewable energy resources and reduce greenhouse gas emissions;
- To promote energy smart living by incorporating energy efficiency measures in the design of buildings and infrastructure
- To promote the use of renewable energy technologies and energy efficient products
- To use the natural climatic advantages of the coastal location such as cooling summer breezes and exposure to unobstructed winter sunlight to assist in minimising energy demands and consumption.

Performance Criteria and Controls

a) Existing Heritage Buildings and Structures

i. Development applications for the adaptive re-use of existing heritage buildings and structures within the DCP area must include a **Sustainable Building Report** that details the energy and water conservation initiatives that will be incorporated into the development, without adversely affecting the heritage significance of the building of structure.

b) Community Centre

ii. Development application/s for the Community Centre must include a Sustainable Building Report incorporating recommendations from a solar power designer, or appropriately qualified professional, to improve the energy efficiency of the building and demonstrate compliance with the objectives of this section.



c) Multi unit and mixed use development

- iii. All new multi unit and mixed use development must submit a Sustainable Building Report incorporating recommendations from a solar power designer, or appropriately qualified professional, to improve the energy efficiency of the building and demonstrate compliance with the objectives of this section.
- New multi unit dwellings must achieve a NatHERS rating of not less than 4.5 stars.
- v. Any non compliance with the nominated NatHERS ratings is to be justified in a report (prepared by an expert in this area) that comprehensively assesses the energy performance of the building and demonstrates compliance with the objectives of these controls.
- vi. All new multi unit and mixed use development must have insulation consistent with the recommended level of Australian Standard (AS) 2627 1993 Thermal Insulation of Dwellings.
- vii. Where practical and appropriate, skylights and/or wind powered ventilators are to be installed to enhance natural light and ventilation.
- viii. All habitable rooms must have at least one openable window, excluding skylight windows.
- ix. Skylight windows are not to provide the only source of daylight and ventilation to habitable rooms.
- x. New multi unit buildings are to maximise north facing roofs, suitable in size, pitch and orientation, for the installation of photovoltaics.
- xi. New buildings are to be pre-wired to accept solar panels and photovoltaics are to be promoted to residents.
- xii. New buildings must be designed to maintain an adequate level of solar access to photovoltaics on neighbouring buildings.
- xiii. All development, including the public domain, is to maximise the use of solar lighting.
- xiv. Energy efficient lighting and control systems are to be provided in all common and outdoor areas, including basement areas in multi-unit car parks.
- xv. Reliance on artificial lighting is to be reduced by:
 - providing a mix of lighting fixtures, including dimmable lighting, to provide for a range of activities in different rooms.
 - using separate switches for special purpose lighting
 - using high efficiency lighting, such as compact fluorescent, for common areas
 - using motion detectors in appropriate locations
 - investigate the use of voltage control units so that suitable lights (fluorescents) can operate in economy mode.
- xvi. A minimum 3.5 star Greenhouse Score water heater is to be provided in each new apartment. The following table indicates which types of systems will achieve this requirement.

Water heater type	Greenhouse Score	
Solar-gas boost*	Storage	5
Gas	Instantaneous	4
Gas-Storage	High Efficiency	4
Electric-Storage	Heat Pump	4
Gas-Storage	Low Efficiency	4
Solar-Electric boost*	Continuous	4
Solar-Electric boost*	Off Peak 2	4
Electric	Instantaneous	2
Electric	Continuous	1
Electric-Storage	Storage (Off peak 1, Off peak 2)	1

^{*} greater than 50% solar contribution



- xvii. Hot water systems should be installed as close as practical to the main draw off point as possible. Insulate pipes and ensure systems are sheltered to minimise heat loss from the system.
- xviii. Where pools and spas are proposed, they are to have solar heating and/or 5 star gas heating.
- xix. The efficiency of household appliances is to be maximised by installing high efficiency clothes dryers and dishwashers.
- xx. Clothes dryers must have a minimum Appliance Greenhouse Score of 3.5. The table below matches the Label Energy Star Rating to the Greenhouse Score.

Label Energy Rating Star	Greenhouse Score
4.5	6.0
4.0	5.5
3.5	5.0
3.0	4.5
3.5	4.0
2.0	3.5 minimum

- xxi. An external clothes-drying area, screened from the street, must be made available for all dwellings and sited to receive good winter sun and breezes, where possible.
- xxii. Gas is to be plumbed into the kitchen and living rooms as a minimum, and any other rooms as desired.
- xxiii. Material selection must take into account the life cycle expectancy of their manufacture, use and disposal.
- xxiv. The use of pvc is to be minimised.



5.2 Total Water Cycle Management

Explanation

Water is a precious resource. Total water cycle management seeks to minimise impacts on the water cycle and sustainably maximise the use and reuse potential of available water sources by maximising stormwater infiltration, reducing stormwater discharge, protecting stormwater quality and facilitating water reuse.

Buildings can contribute to environmental sustainability by integrating measures for improved water efficiency. Landscaping is also a key factor as the types of surfaces and plants used in a development influence water demands, runoff and infiltration.

A *total water cycle strategy* (Appendix D) has been prepared for the whole Prince Henry site. This section of the DCP deals with water cycle management at the lot, building and individual dwelling scale. Applicants need to demonstrate how the proposed development is consistent with the total water cycle strategy for the Prince Henry Site. Details are to be included in the Statement of Environmental Effects and on DA plans.

Sub sections a) and b) of this section currently apply to all development within the Prince Henry site, <u>except</u> for dwelling houses (Energy and water conservation requirements for single dwellings are contained in **Section 5.3** of this DCP).

Subsection c) – Stormwater applies to all development (*including* dwelling houses) within the Prince Henry DCP area.

Objectives

- To reduce consumption of potable water and encourage water reuse on site.
- To maximise the use of sustainable community based stormwater harvesting and detention within the DCP area and surrounds.
- To encourage the use of rainwater tanks in accordance with Randwick Council's Rainwater Tank Policy (excluding dwelling houses).
- To improve stormwater quality and minimise impacts on aquatic receiving environments.
- To ensure stormwater does not cause flooding or damage to any properties, remnant bushland, or public open space.
- To minimise the discharge of sediment and other pollutants during and post construction.
- To ensure that receiving water quality levels are in accordance with the Australian Guidelines for Fresh and Marine Waters, 2000 (or any update).
- To promote and encourage the replication of the natural stormwater cycle including infiltration and water quality treatment.

Performance Criteria and Controls

a) General

- Development applications (excluding dwelling houses) are to include a Sustainable Building Report, which demonstrates how the proposed development is consistent with the Total Water Cycle Strategy (or any update) (see Appendix D) for the Prince Henry site. DA plans and Statements of Environmental Effects are to:
 - contain details, including but not limited to, estimated water usage of the proposed development; and
 - demonstrate how the proposal addresses the estimated water usage and the performance criteria outlined in the following subsections (bd).



- ii. all developments (excluding dwelling houses) are to include a **Stormwater Management Plan** which demonstrates compliance with the objectives and the proposed method of stormwater management, re-use and disposal.
- Water efficient plumbing fixtures are to be incorporated into building design including, but not limited to, dual flush toilets and AAA rated taps and shower heads.
- iv. In-sink food and waste disposal systems are not to be installed.
- v. Water efficient local plant species should be used in landscaped areas.

b) Rainwater Tanks

 Installation of rainwater tanks (excluding dwelling houses) is to be generally in accordance with Council's Rainwater Tank Policy 2003 (or any update), Installation and Plumbing Guide, and relevant Australian Standards.

c) Stormwater (applies to all development including dwelling houses)

- All stormwater must be taken through a sediment/silt arrestor pit (or alternative Council-approved pollutant trap) prior to being discharged from the site. Applicants are advised to contact Council's Drainage Engineer to obtain a copy of Council's standard sediment/silt arrestor pit detail.
- ii. At least two thirds of the area occupied by car parks, car parking spaces, driveways, courtyards, pathways or similar must be laid with permeable paving (areas above underground car parking areas and underground car parking areas and driveway ramps steeper than 1 in 10 are excluded from the calculation for this requirement).
- iii. Piped stormwater systems shall be designed for a minimum 20 year ARI storm event and provision shall be made for safe overland flow for stormwater runoff up to the 100 year ARI storm.
- iv. All habitable and storage areas (including garages and car parking areas) shall be raised a minimum of 300mm above the 1 in 100 year flood levels/overland flow depths (or suitably waterproofed up to this same level).
- v. All site stormwater (in excess of that being retained on the development site for re-use) shall be discharged by:
 - gravity to the street drainage systems; and/or
 - as otherwise approved by Council in accordance with the Total Water Cycle Strategy for the site (refer to **Appendix D**).



As of July 1 2004, the BASIX SEPP applies to single dwellings. All applications for new single dwellings are to include a BASIX Certificate. For more details refer to the BASIX website at www.basix.nsw.gov.au. Applicants are advised to check with Council officers prior to submitting a DA if unclear about these requirements.

5.3 BASIX – Building Sustainability Index

Explanation

State Environmental Planning Policy – (Building Sustainability Index: BASIX) 2004 (BASIX SEPP) is effective from 1 July 2004. This policy aims to encourage the provision of more sustainable homes in NSW. This SEPP will be integrated into the planning system in a series of stages over the next 2 years and replaces a number of Council plans and policies in relation to ecologically sustainable development (ESD).

What is BASIX?

BASIX is an internet based tool designed to assess the potential performance of residential development against a range of sustainability measures. The first stage of BASIX focuses on energy (including thermal comfort) and water conservation. Some aspects of landscaping and stormwater are incorporated in the indices due to their interaction with water and energy efficiency.

BASIX Certificate

Through the internet based assessment tool, the proposed development is allocated scores for different components of water conservation and energy efficiency, and a BASIX Certificate is only issued if the proposed development meets the required conservation and efficiency standards set out in the BASIX SEPP. The BASIX Certificate must be lodged with the development application.

Applicants are responsible for undertaking a BASIX assessment for each residential development proposal as part of the development application process. The BASIX assessment tool and a range of practice notes may be accessed via the BASIX website at www.basix.nsw.gov.au

As subsequent stages of the BASIX SEPP are implemented, Council's DCPs will be amended accordingly.

Objectives

 To ensure new dwelling houses meet the State government's water and energy conservation targets.

Performance Criteria and Controls

 Development applications for new single dwellings are to be in accordance with State Environmental Planning Policy (Building Sustainability Index: BASIX) 2004, and must be accompanied by a BASIX Certificate.



5.4 Waste Management and Minimisation

Explanation

Minimising waste is relevant to all stages of a building's life cycle, from construction to demolition. Large amounts of waste can be generated during the construction of roads, buildings and infrastructure, as well as during the demolition phase, much of which can be recycled and re-used on site.

Waste management and minimisation also includes the way in which waste is stored, recycled and collected on a day to day basis during its occupation.

Objectives

- To encourage waste avoidance and resource recovery.
- To provide for the management of waste and recycling (source separation, reuse and recycling).
- To provide facilities for storing and collecting waste and recycling materials in accordance with the Better Practice Guide for Waste Management in Multi Unit Dwellings, Resource NSW, February 2002.
- To provide for waste removal and recycling whilst maintaining streetscape amenity.

Performance Criteria and Controls

- i. A Waste Management Plan (WMPs), consistent with Randwick City Council's Waste Management Plan Part A, or any update, must be submitted with each DA. The Waste Management Plan should be generally consistent with the Better Practice Guide for Waste Management in Multi Unit Dwellings, Resource NSW, February 2002 (or any update).
- ii. Waste storage facilities for garbage and recycling containers in multi unit developments are to be provided in either a centralised garbage/recycling room accessible to garbage compactors or in a facility where bins can be easily placed on the kerb for collection. Facilities are to be of sufficient size to meet the needs of the dwellings and the garbage/recycling collection service.
- iii. All dwellings in multi unit housing developments are to have a waste storage cupboard in the kitchen of sufficient size to hold a single day's waste and that facilitates the separation of recyclable materials.
- iv. Storage areas for garbage and recycling bins are to be located away from the front of the development and are to be appropriately screened. Details are to be shown on DA plans.
- v. On-site composting is to be incorporated, where possible, and detailed in the DA plans.



5.5 Environmental Education

Explanation

Environmental education plays a key role in sustainability. The ability to make informed choices and ways of dealing with environmental problems will help us towards sustainable living.

Environmental education packages raise resident's awareness of the environmental measures and sustainable features incorporated into the buildings and landscape on the site. These packages can also assist residents in understanding how to manage and maintain certain features (such as rainwater tanks) to ensure they operate efficiently and minimise costs.

Objectives

- To educate residents on the sustainability features of the development (both in their immediate building and the Prince Henry site as a whole).
- To encourage the use and maintenance of water efficient and energy efficient design features of the development over time.

Performance Criteria and Controls

- i. For developments comprising 3 or more dwellings, *Environmental education toolkits* and resource packages are to be provided for all residents detailing the design features and maintenance requirements for the sustainability features of the development, and neighbouring natural and built heritage including, but not limited to:
 - rainwater tanks;
 - total water cycle management (including water conservation devices and stormwater treatment);
 - solar powered devices (including information on photovoltaic connection options and wiring);
 - energy conservation devices;
 - transport access guide (refer to Section 6.1 for details);
 - composting
 - natural heritage (ie remnant bushland, Little Bay Geological Site)
 - built heritage
- ii. The environmental education package should identify site specific initiatives and may be complemented with information from Randwick City Council (such as the *Local Native Plants for Sydney's Eastern Suburbs* brochure) and other relevant organisations.
- A draft environmental education package is to be submitted with the Development Application.



5.6 Bushfire Risk Management

Explanation

There are two areas of remnant bushland within and surrounding the Prince Henry site, identified in Section 2.4 of the DCP. The site was assessed by the NSW Fire Brigades Bushfire Hazards section in 2001 and 2003. It is not classified as Bushfire Prone Land under the *Rural Fires Act 1997*. To manage bushfire risk, the NSW Fire Brigades nominated Asset Protection Zones (APZ) for development in the vicinity of these bushland areas, which are generally reflected in the site's infrastructure design by way of buffers established by dedicated roads, paths and building setbacks. The requirements of the NSW Fire Brigades Bushfire Hazards Section are contained in **Appendix B**.

<u>Note</u>: the requirements of the NSW Fire Brigade Bushfire Hazard Section contained in Appendix B are current at the time of printing. Should these requirements be revised or superseded in the future, then any new requirements will apply to development on the Prince Henry site (or any update).

A key requirement is the provision of an Asset Protection Zone between the bushland and any development. An Asset Protection Zone is an area of land that is not built upon, and is measured from the edge of the identified bushland to the edge of the building. It can include roads and private open space.

In addition to the general provisions below, detailed requirements are included in the precinct specific controls in *Part* 7 of this DCP.

Objectives

- To minimise the risk of fire spread from the bushland areas and impacts on development within the Prince Henry site.
- To ensure development is in accordance with the requirements of the NSW Fire Brigade Bushfire Hazard Section.

Performance Criteria and Controls

 All new development is to be consistent with the requirements of the NSW Fire Brigade Bushfire Hazard Section (refer also to the Precinct Controls in *Part 7* of this DCP).



Applicants are advised to contact Council prior to submitting any development application to confirm status of the staged remediation program.

5.7 Contaminated Land

Explanation

Detailed investigations of the site have revealed that the Prince Henry Site is contaminated in some locations. A staged remediation program is being undertaken. Individual sites within the staged remediation program must be validated by the Site Auditor as being fit for the purpose for which they are proposed, prior to the commencement of development works under this DCP.

Objectives

- To ensure that any contaminated land, after remediation, is suitable for the purpose for which development is proposed to be carried out.
- To ensure that contaminated land is remediated prior to use.
- To ensure development complies with Council's Contaminated Land Policy.

Performance Criteria and Controls

- Emergiation of the development site must be completed to the satisfaction of Council prior to commencing development under this DCP.
- ii.
- iii. The development site is to be investigated, remediated, validated and certified prior to development in accordance with:
 - NSW Contaminated Land Management Act 1997;
 - EPA's "Guidelines for Consultants Reporting on Contaminated Sites" 1997, and "Guidelines for the NSW Site Auditor Scheme" 1998;
 - State Environmental Planning Policy 55 Remediation of Land; and
 - Randwick City Council's Contaminated Land Policy.



Refer to Council's Parking DCP for parking requirements.

Refer to the RTA's website www.rta.nsw.gov.au for details of the RTA brochure 'Producing and Using Transport Access Guides'.

6. FACILITIES AND ACCESS

6.1 Pedestrian and Cycle Access

Explanation

Alternative modes of transport to the car include cycling, walking and public transport (bus). Initiatives that reduce car dependency are consistent with State government policy and Council's commitment to ESD.

The pedestrian and cycle links and proposed bus circulation on the Prince Henry site are shown in **Part 2**. The site's street and pedestrian/cycle path network provides convenient movement through the site, and provides strong pedestrian connections to Anzac Parade and Little Bay beach. All development should further encourage the use of alternative modes of transport.

Objectives

- To promote safe and convenient pedestrian movement through the site.
- To promote the use of bicycles as a safe and convenient alternative mode of transport to and from, and within the Prince Henry Site.
- To facilitate public transport use.

Performance Criteria and Controls

- All development should maximise opportunities for pedestrian and cycle access and movement around the site.
- ii. For development consisting of 3 or more dwellings, a *Transport Access Guide* must be produced in accordance with the RTA brochure '*Producing and Using Transport and Access Guides*' (or any update) and included as part of the environmental education package for the site.
 - Applicants are advised to check with Council for information that can be readily incorporated into a Transport Access Guide.
- Bicycle parking for multi unit dwellings is to be provided in accordance with Randwick City Council's Parking DCP.

6.2 Barrier Free Access

Explanation

Well designed housing accommodates the changing needs of residents over time and enables elderly people to stay in their homes for longer.

Provision of special access requirements can be incorporated without difficulty in new development if fundamental design issues are considered early in the design process. The requirements of the Building Code of Australia incorporate Australian Standard AS 1428.1 – Design for Access and Mobility Part 1. Reference should also be made to AS 1428.1 – Part 2, and AS 4299 – Adaptable Housing.

Objectives

- To provide housing that can easily be adapted to meet the specific requirements of residents with special needs or disabilities.
- To encourage the provision of accessible and adaptable housing to meet "whole of life" needs for the community.



Performance Criteria and Controls

- The design of new development, other than the design of single dwelling houses, is to provide special needs access. This includes access to and from public foyer areas, parking areas, and landscaped areas (including private open space for dwellings that have been nominated as adaptable dwellings).
- Access for people with a disability is to be provided to and within multi unit housing developments at the following minimum rates:

0-14 dwellings 15-29 dwellings 2 30-44 dwellings 45-59 dwellings

3 and so on

The requirements of AS1428.1 and AS 4299 are to be incorporated in special needs and adaptable dwelling designs.

- Each dwelling that is designed to be accessible for people with a disability is to have a corresponding suitably located parking space designed for people with a disability.
 - Access to public areas of buildings and dwellings should be direct and without unnecessary barriers.
 - All development that provides a passenger lift is to provide access for people with a disability to all common foyer and parking areas.
 - Publicly accessible areas within private developments are to be provided with facilities for access and mobility in accordance with the Building Code of Australia.

6.3 Vehicle Access and Parking

Explanation

The location, type, and design of vehicle access points to a development have a significant impact on the streetscape, site layout and building design. It is important that vehicle access is integrated with site planning from the earliest stages to minimise any potential conflicts with pedestrians, streetscape requirements and traffic patterns.

Objectives

- To provide adequate and convenient parking for residents and visitors.
- To provide bicycle access and facilities.
- To ensure car parking areas provide parking spaces for people with a disability.

Performance Criteria and Controls

- Accessible, safe and secure storage areas for bicycles are to be provided:
 - within the storage areas of each dwelling; or
 - within the designated parking space of each dwelling; or
 - in a separately secured purpose built facility provided in the basement (if any) or on the ground floor of multi unit dwellings, capable of storing a bicycle for each dwelling.



- Parking provision is to be in accordance with Randwick City Council's Parking DCP.
- iii. In multi unit housing developments, resident and visitor parking is to be provided below the building to which it is allocated. Where parking cannot be provided below a particular building (for example due to heritage constraints), parking is to be provided as close as possible to the building it is intended to serve.
- iv. Separate entries are to be provided for pedestrians and vehicles.
- v. Vehicular access in multi unit housing developments is to be designed to allow all vehicles to enter and leave the site in a forward direction.

6.4 Driveway Design

Explanation

The design of driveways can have a significant impact on the appearance of a street. In the case of the Prince Henry site, the location of driveways and the materials used is important, because of the large number of built and landscape elements of State and local heritage significance.

Driveways need to be carefully located so that damage to tree roots and conflict with traffic and on street parking is avoided.

Objectives

- To minimise the area of hard paving.
- To minimise the potential for conflict between vehicles and pedestrians.
- To minimise the visual impact of driveways and garage doors on the streetscape.
- To ensure driveways are integrated with landscape design and are provided in accordance with the relevant standards and guidelines.

Performance Criteria and Controls

- Driveway location, width, and design is to comply with Australian Standard AS 2890.1
- ii. Two single driveways may only be provided for a residential apartment building where the distance between the crossings exceeds 30m (or where the driveways are located on two different streets).
- iii. Driveways to underground car parks are to be separate from pedestrian entries and designed so that the visual impact on the street is minimised.
- iv. Driveways to underground car parks must not be located adjacent to doors or windows of habitable rooms.
- v. Driveways and kerb crossings are to be sited to have minimum impact on the root zone of existing trees.
- vi. Driveways, car parking spaces and car parking structures are not to occupy more than 35% of the width of the allotment.
- vii. Driveways should have a maximum width of 3 metres at the property boundary and footpath crossing.
- viii. Driveway gradients are not to exceed 1 in 6. For driveways longer than 20 metres, a maximum gradient of 1 in 5 can be used with suitable transition grades as outlined in Council's Parking DCP.
- ix. Garage doors are to be setback a minimum of 1 metre behind the front face of the building and kept to minimum width.
- x. Garages and carports facing streets or public open space must have a maximum width of 6 metres, or 35% of the allotment frontage, whichever is the lesser.



6.5 Utilities/Site Facilities

Explanation

Site facilities include loading areas, garbage areas, recycling facilities, mail boxes, external stores, laundries and clothes drying areas. Development should provide appropriate site facilities for retail, commercial and/or residential uses that have minimal impact on the streetscape.

Objectives

- To ensure ancillary site facilities are accessible, functional and unobtrusive.
- To ensure utilities and ancillary site facilities are carefully incorporated into the design of the development and streetscape character, and require minimal maintenance.

Performance Criteria and Controls

- Mailboxes are to be provided in accordance with the delivery requirements of Australia Post. Mail boxes are to be integrated into the entrance way or entrance pathway to multi unit dwellings rather than along the fence facing the primary street frontage.
- ii. A suitable screened single common television/radio antenna (or other types of communication reception device) is to be provided to service all dwellings in a development. The antenna should not be visible from the public domain.

iii. Electricity:

- services are to be provided in accordance with the requirements of Energy Australia;
- all electrical reticulation is to be underground; and
- meter boxes are to be placed in positions acceptable to the energy provider and screened from the street.
- iv. A reticulated gas supply to a meter for each dwelling, and to optimum service points for cooking and space heating is to be provided.
- v. Water and sewerage connections are to be provided in accordance with the requirements of Sydney Water.
- vi. Adequate garbage and recycling areas must be provided to satisfy Council's waste collection requirements. These areas are to be integrated with the development and screened from the street and windows of the development to minimise their impact on the streetscape and neighbours. Such facilities should be located away from windows to habitable rooms to avoid amenity problems. Refer to Section 5.4 Waste Management and Minimisation for details.
- vii. Telephone lines are to be installed in accordance with the requirements of the service provider.
- viii. Laundry and drying facilities:
 - Outdoor clothes drying facilities are to be accessible to all residents and screened from the street and public spaces.
 - Alternatively, a retractable or demountable clothesline is to be provided in the courtyard or on a screened service balcony of each dwelling.



6.6 Storage

Explanation

Providing adequate and useable storage space is an important design consideration, particularly for multi unit housing.

Objectives

- To ensure new development is provided with adequate storage space.
- To ensure new development includes readily accessible and separately contained storage areas for each dwelling.

Performance Criteria and Controls

i. In addition to kitchen cupboards and bedroom wardrobes, accessible storage facilities are to be provided at the following minimum rates (half of which may be located in garages, semi-basement enclosures or located externally):

Dwelling* size	Minimum accessible storage
Studio	6m³
1 bedroom	8m³
2 bedroom	10m³
3 or more bedrooms	12m³

^{*} includes apartments

- ii. Storage is to be provided to accommodate larger items such as surfing, skiing equipment, bicycles, etc.
- iii. External storage spaces must have a minimum height of 1.5m.



7.0 PRECINCT SPECIFIC CONTROLS

This section contains precinct specific controls. These controls apply in addition to the general controls contained in the remainder of the DCP.

To the extent of any inconsistencies between the general and precinct specific requirements, the precinct specific requirements prevail.

Each precinct section comprises:


- objectives;
- statement of desired character;
- precinct specific performance criteria and controls (text and Precinct Control diagram); and
- indicative cross section(s).

Building height, FSR and minimum landscaped area requirements are set out in the Built Form Control table (**Figure 7, Part 2**).

The relevant figures for the Precincts are located at the end of this section. Note that the figures show proposed lot boundaries that may be subject to change with subdivision applications. Nevertheless the specified performance criteria and controls will continue to apply. The figures do not show road details (including footpaths, verges, road lanes or parking) for clarity.

Applicants must demonstrate that the site analysis submitted as part of any DA, addresses the key principles outlined in Part 2 of this DCP.



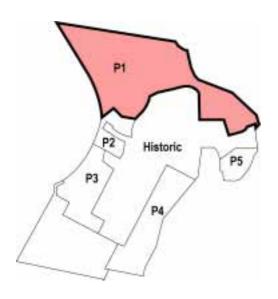

7.1 Precinct P1

Precinct P1 is located in the north and north-western corner of the DCP area and is directly accessible from Anzac Parade.

Key features within this precinct are the Northern Bushland Park and Oval Park, located in the centre of the precinct, and the part of the Little Bay Geological Site and Potential Ochre site located within the DCP area, along the northern boundary of the precinct. This precinct also contains the two northern road accesses to the site.

Precinct Objectives

- To achieve a distinctive built form and strong streetscape character along Anzac Parade with buildings framing the entrance road to the precinct.
- To protect remnant bushland and the significant features of the Little Bay Geological site and potential ochre site.
- To reinforce the curved form of Oval Park via a strong, consistent built edge.
- To ensure a consistent built edge along park and street frontages
- To encourage a mix of housing types within the precinct whilst maximising view sharing
- To provide a north-south biological link along the eastern edge of this
 precinct (forming part of a larger link across the Prince Henry site).

Desired Character

This precinct will contain a mix of residential buildings focused around the Oval Park and the Northern Bushland Park and towards the ocean views. The Northern Bushland comprises an area of Eastern Suburbs Banksia Scrub (ESBS), an endangered ecological community that occurs on the Prince Henry site in a number of locations.

Building height and density will vary across the precinct, ranging from four storey envelopes suited to residential flat buildings along the western, Anzac Parade frontage, through to two storey envelopes suited to medium density attached housing (such as terrace and courtyard houses) towards the centre of the precinct.

The building envelopes along the northern and eastern boundaries of the precinct suit low density detached and semi-detached housing. Development of this scale will retain a sense of openness, a significant characteristic of the site, and views and vistas to the ocean from all parts of the site. Building envelopes in the central part of the precinct will provide a transition in density and scale between the taller four storey envelopes along Anzac Parade and the two storey envelopes along the northern and eastern edges of this precinct.

Building siting and design will maximise view-sharing opportunities. View corridors will offer visual and physical links between communal and private open space. The building envelopes have been designed so that where possible, communal open spaces are located adjacent to the remnant bushland or opposite other communal open spaces to create a feeling of a larger landscaped area and ensure that the landscape is not dominated by buildings. The detached dwelling allotments are located along the site's northern and north-eastern boundary and adjacent to the golf course, which will create a feeling of open space that is more extensive than the private open space of each individual allotment.

A former oval on site has been incorporated into a similar scale open space (Oval Park), with a pedestrian connection to the local shops in Precinct P2. Pedestrian paths also run along the edges of the Northern Bushland Park, linking it to Anzac Parade.

Low fencing and substantial landscaping along the Anzac Parade boundary will provide a green corridor along Anzac Parade.



Little Bay Geological site and Potential Ochre site

The Little Bay Geological site (which extends across the northern boundary of the Prince Henry site onto adjacent land) is a site of national significance. It provides evidence of topography, relative sea level, vertical land movements and coastal landscape prior to the formation of Sydney Harbour and other coastal valleys. The Little Bay Geological site has been divided into three management areas (the Critical Exposure Area, the Cleared Area and the Palaeovalley Area) which also extend across the northern boundary of the Prince Henry DCP site onto adjacent land. The Critical Exposure Area includes outcrops of exposed rock, clay shale and gully-fill sands.

The part of the Critical Exposure Area within the Prince Henry site (and within this precinct) is to be retained (exposed) to form the 'Geological Reserve'. The Cleared Area within the Prince Henry site (and this precinct) will be largely filled over to protect its significant surfaces.

The Potential Ochre site, which has been identified as a potentially significant Aboriginal site, also extends across the northern boundary of the Prince Henry site onto adjacent land. Although largely underground within the Prince Henry site (and within this precinct), the Potential Ochre site is exposed within the Geological Reserve (Critical exposure area) which will remain exposed to allow for interpretation.

Those areas of the Little Bay Geological site and the Potential Ochre site within the Prince Henry site are to be managed together with those areas on adjacent lands.

Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

 Building height, FSR, setback and landscaped area for all lots in Precinct P1 are to comply with the controls set out in the Built Form Control Table.

Note:

- Maximum height and FSR may not be able to be achieved in all instances, however the requirements for minimum landscaped areas must be achieved in all instances.
- Lofts are permitted in identified locations. These locations have been identified to enable a diversity of housing types whilst minimising the impact of development on the existing heritage buildings in the adjacent Historic Precinct.
- ii. Maximum building envelope depth for apartment buildings (3-4 storeys) is 13 metres.
 - Note: building envelope excludes building articulation depth.
- iii. All new buildings are to have a parallel alignment to the primary street frontage.
- iv. New buildings are to be sited and designed to form a strong, predominantly continuous built edge to the primary street frontage and public parks and pathways, namely Anzac Parade, Roads NR1, NR3, EX 2 and EX3, and the oval park and connecting path to the corner of Anzac Parade and Pine Avenue.
- Buildings are to be articulated along the facades identified on Figure 7.1
 Precinct P1 Controls.
 - minimum articulation depth 2m

<u>Note</u>: buildings should be appropriately articulated using a combination of measures. Refer to **Section 4.6** for further details.



- vi. The following minimum setbacks apply to all buildings in Precinct P1, unless otherwise specified in Figure 8:
 - front setback 3m
 - side setback (detached dwellings) 1.5m
 - side setback (where side property boundary adjoins a road or public pedestrian path)
 - side setback (where side property boundary adjoins the Little Bay Geological Site Critical Exposure Area)
 - rear setback (dwellings along northern site boundary and adjoining golf course)

<u>Note</u>: side and rear setbacks for detached dwellings have been designed to maximise opportunities for view sharing.

3m

- vii. Buildings along Anzac Parade (four storey, plus loft in identified locations) are to provide a built form consistent in height and scale along Anzac Parade, and are to frame the entrance roads to the precinct. The building envelope for Lot 1-2 should provide for a landscaped area at the rear, to allow views northwards to the ocean.
- viii. All development is to maximise the opportunity for view sharing. Maximum building height and FSR for detached dwellings may not be achieved where views (from private <u>and</u> public open spaces) would be unreasonably obstructed. View analysis details are to be included as part of the site analysis submitted at DA stage.
- ix. All buildings are to be setback 7m from the Anzac Parade property boundary and should form a strong, consistent built edge along Anzac Parade.
- x. Buildings adjacent to Anzac Parade are to incorporate a 3m landscaped strip (as part of the 7m setback) and low fencing (700mm high), with both fencing and landscaping contributing to privacy, a high level of amenity and a consistent streetscape.
- xi. Buildings surrounding Oval Park are to follow the street and park alignment and reinforce its curved form.
- xii. Development in Lot E1 is to match the front building alignment of the adjacent heritage building (former Institute of Tropical Medicine).

Landscaping


- xiii. Landscape planting is to complement and not dominate the remnant stands of Eastern Suburbs Banksia Scrub in the Northern Bushland Park.
- xiv. Buildings surrounding the Northern Bushland Park must demonstrate no adverse overshadowing impacts on this bushland.
- xv. Landscaping, paths, driveways and the like, adjacent to the Northern Bushland Park, are to be designed to ensure no stormwater run off into the remnant bushland areas.
- xvi. Landscaping plans for lots surrounding the Northern Bushland Park must demonstrate that species planted will not result in any adverse weed invasion or overshadowing of this bushland.
- xvii. An asset protection zone of 6m (minimum) should be provided between new buildings and any remnant vegetation in the Northern Bushland Park (Figure 8) consistent with the requirements of the NSW Fire Brigade, Bushfire Hazards Section (See Appendix B). As shown on Figure 8, this asset protection zone should take the form of publicly accessible paths and private driveways.



Heritage

- xviii. All development must be accordance with the Conservation Management Plan, Archaeological Management Plan and any relevant Specific Elements Conservation Policy and must demonstrate that:
 - new buildings maintain an appropriate setting for the former Matron Dickson Nurses Home, the Artisans Cottages, Institute of Tropical Medicine and former Motor Garage (all located in the adjacent Historic Precinct – see Figure 18);
 - the Critical Exposure Area of the Little Bay Geological Site (which also contains the exposed part of the Potential Ochre Site) is to be retained intact remains intact, and new development is to be designed to minimise impacts on this area; will not result in any adverse impact;
 - new development on lots within the Cleared Area of the Little Bay Geological Site and within the boundaries of the Potential Ochre site is designed so that non-essential excavation or scouring of significant rock surfaces is avoided;
 - the number and size of footings on the exposed rock surfaces within the Cleared Area and Potential Ochre site is minimised;
 - ground level adjustments within the Cleared Area and extent of the Potential Ochre site are made by fill, not excavation; and
 - excavation within the possible extent of the Palaeovalley Area should not be below RL 26 unless endorsed by Randwick City Council and the NSW Heritage Office.
- xix. Car parking for development within the Cleared Area and/or Potential Ochre site must be provided above ground to prevent any damage to their significant features.
- xx. Development must demonstrate consideration of the Bushland Plan of Management (POM), and the Little Bay Geological Reserve Plan of Management (POM). In particular, development must meet the objectives of these POMs.



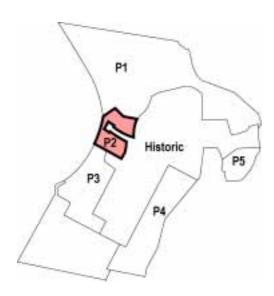

7.2 Precinct P2

Precinct P2 is located adjacent to Anzac Parade at the Pine Avenue entrance to the DCP area.

Key features within this Precinct are Pine Avenue, which is the main entrance to the Prince Henry site. Significant historic elements including the entrance gateposts to the former hospital and the alignment of Pine Avenue form part of the adjoining historic precinct (which encompasses the majority of significant historic elements within the central part of the DCP area), however these elements have an important relationship with the development of Precinct P2.

Key views include the view along Pine Avenue, and the view towards the former Pathology Department Building, the Clocktower and Flowers Wards and beyond.

Precinct Objectives

- To create a local neighbourhood centre that provides for the needs of new residents and the existing community in the locality.
- To reinforce Pine Avenue as the gateway to the Prince Henry site.
- To create a strong, consistent built edge along Anzac Parade.
- To ensure new development maintains views along Pine Avenue to the Entrance Gates, Gateposts, Gatehouse, Flowers Wards, Clocktower and beyond.
- To encourage a mix of neighbourhood scale retail, commercial and residential uses that will create a vibrant and attractive local neighbourhood centre

Desired Character

This precinct will contain a neighbourhood centre located at the Pine Avenue entrance to the site. The centre will contain a mix of retail, commercial and community uses, including a potential medical centre and potential supermarket, with apartments above. The centre will serve the adjoining neighbourhoods.

Building height within the precinct is generally four storeys, with a component in Lot 18 stepping down to three storeys opposite Flowers Ward 1 to create a transition in scale between development fronting Anzac Parade and the adjoining Historic Precinct to the east.

Buildings are to provide a strong built edge to Anzac Parade, and active frontages are encouraged along all streets and public paths where activity strips are identified within this precinct (refer to **Figure 6**). Buildings along Pine Avenue will provide a strong, consistent alignment to reinforce the historic alignment and significance of Pine Avenue. Colonnades and broad pavements will extend along Pine Avenue at ground level, providing sheltered outdoor areas for social interaction.

A public path provides a direct pedestrian and visual link between the neighbourhood centre/Anzac Parade and the Oval Park and the northern part of the site.

A small parking area for the neighbourhood centre will be clearly separated from resident parking (to be located underground). The neighbourhood centre parking is provided at-grade (to maximise accessibility for less mobile people) in well landscaped car park(s), which will be screened from surrounding buildings and roads by the neighbourhood centre buildings. At grade car park(s) will be designed to maximise opportunities for water sensitive urban design (eg. stormwater collection and re-use).



Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

 Building height, FSR, setback and landscaped area for all lots in Precinct P2 are to comply with the controls set out in the Built Form Control Table.

<u>Note</u>: Maximum height and FSR may not be able to be achieved in all instances; however the requirements for minimum landscaped areas **must** be achieved in all instances.

- Development is to comply with the setbacks shown on Figure 10 Precinct P2.
- iii. New buildings are to present a strong built edge to Anzac Parade and Pine Avenue.
- iv. The preferred design solution for the corner of Anzac Parade/Pine Avenue corner of Lot 19 is a strong built corner and entry to the site, which follows the building envelope edge shown in Figure 10.

Alternative design solutions (such as a landscaped plaza) may be considered, subject to the applicant demonstrating that this solution meets the objectives of this DCP and is a preferable design solution to the preferred option outlined above.

- v. Building depth is to maximise opportunities for cross ventilation and dual aspect apartments.
- vi. Active frontages are to be provided along Pine Avenue, Anzac Parade, and the southern side of Lot 18.
- vii. Lot 18 is to provide an active frontage which maximises outlook over the pathway (which links the corner of Pine Avenue/Anzac Parade to the Oval Park) to maximise pedestrian amenity and safety (see Figure 10 for setback requirements).
- viii. All buildings are to be setback 7m from the Anzac Parade property boundary to form a strong, consistent built edge along Anzac Parade.
- Development in Lots 18 and 19 is to match the building alignment of the adjacent heritage buildings, as shown on Figure 10.
- x. Awnings over a public footway are to be:
 - a minimum clear height of 3m above the footpath
 - not less that 600mm from the edge of the road/kerb.


Landscaping

- xi. Details of the proposed landscaping along the Anzac Parade and Pine Avenue frontage (including paving materials and planting) are to be submitted at DA stage.
- xii. Landscaped roof terraces may be used to provide communal open space for the residential levels of the buildings.
- xiii. At-grade car parking is to be well landscaped and is to maximise opportunities for deep soil areas and effective water cycle management.

Heritage

- xiv. All development must be in accordance with the Conservation Management Plan, Archaeological Management Plan and any relevant Specific Elements Conservation Policy and must demonstrate that:
 - New buildings maintain an appropriate setting for the Historic Precinct, particularly significant buildings and landscape features in the vicinity such as the Gateposts and Gatehouse, former Pathology Department Building, as well as views along Pine Avenue to the Clocktower, former Flowers Wards and beyond (see also Part 2 Views and Vistas).



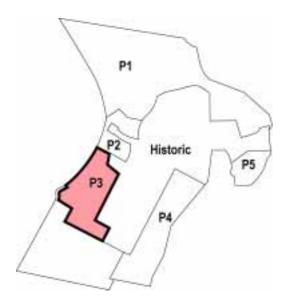

7.3 Precinct P3

Precinct P3 is located in the south western corner of the DCP area. It is bounded by the neighbourhood centre precinct to the north, the Historic Precinct and Brodie Avenue to the east, Anzac Parade to the west and remnant bushland to the south.

A key feature of the precinct is its elevated location. The precinct contains a small number of significant landscape elements, such as sandstone outcrops and the entrance gates to the former Executive Officer's (CEO) residence, which are to be incorporated within new development.

Precinct Objectives

- To achieve a transition in scale from the neighbourhood centre precinct to lower scale development to the east.
- To achieve a strong landscape edge along Anzac Parade.
- To protect remnant bushland and significant landscape features.
- To ensure that the bulk, scale and design of new development complements adjacent heritage buildings.
- To encourage simple, rectilinear block building forms which relate to the adjacent Flowers Wards.
- To encourage a mix of housing types.

Desired Character

Development within this precinct will comprise aged care accommodation, residential development and a women's health facility. These three different types of development are proposed to be quite separate entities, and require visual separation via landscaping to act as a buffer between uses, to ensure appropriate levels of privacy. A key design objective for this precinct is to ensure outlooks from future buildings are to trees rather than adjacent buildings.

This precinct contains significant rock outcrops and a number of significant trees. These landscape elements have been a key influence on building envelope design, indicative lot subdivision and indicative vehicular entry point location within this precinct, to ensure future development does not affect these elements.

The built form controls of this precinct generally continue the pattern of Precincts P1 and P2, with the tallest building envelopes located along Anzac Parade and the adjacent to the bushland (south of this precinct). The building envelopes step down in height towards the east, to result in a built form compatible in scale with the adjacent buildings in the historic precinct.

Buildings are to be well set back from Brodie Avenue so as not to compete visually with the former Flowers Wards opposite, and to conserve the sandstone rock cuttings and outcrops (identified on the Precinct P3 Plan as LE-15). Buildings should have simple, rectilinear forms to relate to the historic Flowers Wards.

The women's health facility, Jarrah House, located in the south western corner of this precinct, will be low scale and will be visually separated from the rest of the site, by screen planting, with separate access from Anzac Parade. This facility will have direct vehicular access from Anzac Parade. This is the only direct access appropriate along Anzac Parade (in addition to the 3 main access roads to the Prince Henry site: northern; Pine Avenue; and southern access roads).

The landscape design of the aged care accommodation is to incorporate the entrance gates to the former CEO's Residence.

The tallest buildings (5 storey) are located along the southern edge of this precinct, immediately north of the southern access road (from Anzac Parade) to the site. These buildings are required to be of an alignment, scale and form that avoids adverse impacts on the remnant bushland to the south and respects the nearby heritage buildings to the north and east, including the Flowers Wards



and the Delaney Building.

Low fencing and substantial landscaping along the site's Anzac Parade edge will provide a green corridor along Anzac Parade.

Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

i Building height, FSR, setback and landscaped area for all lots in Precinct P3 are to comply with the controls set out in the Built Form Control Table.

Note:

- Maximum height and FSR may not be able to be achieved in all instances; however the requirements for minimum landscaped areas must be achieved in all instances.
- Lofts are permitted in identified locations. These locations have been identified to minimise the impact of development on the existing heritage buildings in the adjacent Historic Precinct.
- ii. The following minimum building setbacks apply, unless otherwise specified in Figure 12 Precinct P3:

Anzac Parade property boundary 7m

Brodie Avenue property boundary

7_m

Note: a large setback to Brodie Avenue is required to accommodate a change in ground level and to ensure landscape elements (rock cuttings and outcrops) are adequately protected.

- iii. Buildings adjacent to Anzac Parade are to be aligned and designed to give an attractive edge and address to Anzac Parade.
- Residential building setback areas facing Anzac Parade are to iv. incorporate a 3m landscaped strip (as part of the 7m setback) and low fencing, with both fencing and landscaping contributing to privacy and a high level of amenity.
- ٧. Development in Lot 20 and Lot 22-30b is to match the building alignment of existing heritage buildings (in the adjacent Historic Precinct), as identified on Figure 12.

Landscaping

- Landscaping plans for lots adjacent to remnant bushland must vi. demonstrate that species planted will not result in any weed invasion or overshadowing of this bushland.
- An asset protection zone of 8m (minimum) is to be provided between vii. new buildings and any remnant bushland consistent with the requirements of the NSW Fire Brigades, Bushfire Hazards section (see Section 5.6 and Appendix B).
- viii. Buildings adjacent to the southern bushland must demonstrate no adverse overshadowing impacts on this bushland.
- Landscaping, paths, driveways and the like, adjacent to the southern ix. bushland are to be designed to ensure no stormwater run off into the remnant bushland areas.
- Development must demonstrate consideration of the Bushland Plan of X. Management (POM). In particular, development must meet the objectives of this POM.



Heritage

- xi. All development must be accordance with the Conservation Management Plan, the Archaeological Management Plan and any relevant Specific Elements Conservation Policy and must demonstrate that:
 - New buildings maintain an appropriate setting for the Historic Precinct including significant buildings and landscape features in the vicinity such as the Flowers Wards, Henry's Trading Post, Heffron House and the Delaney building (see Figures 18-19);
 - The entrance gates to the former CEO's Residence are to be incorporated into the landscaping for the Aged Care facility.
 - significant landscape heritage elements such as outcropping sandstone adjoining the Historic Precinct are conserved and incorporated into the landscape design for new development; and
 - landscaping in this precinct complements that in the adjoining Historic Precinct.





7.4 Precinct P4

Precinct P4 is located in the south-eastern part of the DCP area adjoining the Coast Golf Course.

Key features within this precinct are the Southern Local Park and the adjoining Golf Course buffer separating the DCP area from the golf course. This precinct adjoins the Historic Precinct to the north and west, and an area of remnant bushland, also to the west. The topography slopes down to the east towards the golf course and coast.

Precinct Objectives

- To create a consistent edge of buildings facing Ewing Avenue that respect the heritage buildings opposite and step down toward the golf course.
- To protect remnant bushland to the south west and within the buffer strip
 and Southern Local Park, and provide for a vegetated link along the
 southern boundary pf the DCP area between the Jennifer Street remnant
 bushland and the golf course buffer.
- To maximising view sharing within the precinct and from the historic precinct.

Desired Character

This precinct will be characterised by residential uses in the form of apartments, and significant open space linking to the golf course and beyond. Development ranges in height from two storeys immediately opposite the former Flowers Wards to three storeys, stepping down as the topography slopes down towards the coast. This precinct also includes a medical research facility (Lot 33a) 1-3 storeys in height.

The precinct overlooks the Coast Golf Course and adjoins open space to the north, east and south west. New development will maximise view opportunities and open up view corridors from significant places within the adjoining historic precinct, including the main axis of the former Flowers Wards.

The apartments which line Ewing Avenue will form a group of buildings of height and scale consistent with the form of the former Flowers Wards buildings. These buildings will be sited to maintain visual and publicly accessible pedestrian links between Ewing Avenue and the linear open space buffer strip to the golf course. A built form that steps down in response to the precinct's sloping topography is encouraged.

Key open spaces in this precinct include the southern park and the linear buffer strip running along the eastern edge of the site. Pedestrian and cycle connections will be provided along the buffer strip connecting the southern park to the Pine Avenue Park, while also providing for a vegetated north-south habitat corridor. Pedestrian paths will also connect the Historic Precinct to the buffer strip.



Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

iii.

 Building height, FSR, setback and landscaped area for all lots in Precinct P4 are to comply with the controls set out in the Built Form Control Table.

<u>Note</u>: Maximum height and FSR may not be able to be achieved in all instances; however the requirements for minimum landscaped areas **must** be achieved in all instances.

ii. The following minimum building setbacks apply, unless otherwise specified in Figure 14:

Setback from Ewing Avenue 3m
Setback from property boundary 4.5m
adjoining pedestrian paths

Setback from boundary adjoining remnant bushland (consistent with the requirements of the NSW Fire

with 2.1m wide landscaped verges on either side).

- Brigade, Bushfire Hazard Section)

 The pedestrian paths linking Ewing Avenue to the open space buffer
- iv. New buildings facing Ewing Avenue are to create a strong built edge consistent with the scale and form of the historic Flowers Wards.

strip are to be a minimum width of 6 metres (comprising a 1.8m path

- v. New buildings are to be sited and designed to form a strong, predominantly continuous built edge to the primary street frontage and to public parks and pathways, namely existing road EX 6, and the pathways connecting EX6 to the golf course buffer strip.
- vi. Buildings are to be articulated along the facades identified in Figure 14 Precinct P4. Minimum articulation depth required is 2m.
- vii. Development in Lots 34, 35, and 36-37 is to match the building alignment of the Flowers Wards opposite, as per Figure 14.
- viii. Buildings surrounding the Southern Local Park are to address the park with articulated facades including windows that overlook the park.
- ix. Applicants are to demonstrate that building design does not obstruct views along Ewing Avenue and along the pedestrian paths. Details are to be included at DA stage.

Landscaping

- x. Planting is to comprise local native species, primarily low in mature height, to maintain views and vistas of Little Bay and the adjoining coastal scenery from both the private <u>and</u> public domain.
- xi. Landscape Plans for lots adjacent to remnant bushland and the buffer strip are to demonstrate that species planted will not result in any weed invasion or overshadowing of indigenous vegetation.
- xii. Lots 33a and 33b are to comprise suitably designed landscaping along their southern boundaries to provide a continuous, vegetated link along the southern boundary of the DCP area, between the Jennifer Street remnant bushland and the golf course buffer.
- xiii. An asset protection zone of 8m is to be provided between new buildings and remnant bushland or the buffer strip, the golf course consistent with the requirements of the NSW Fire Brigade, Bushfire Hazard section (see **Section 5.6** and **Appendix B**).
- xiv. Landscaping, paths, driveways and the like, adjacent to the southern bushland are to be designed to ensure no stormwater run off into the remnant bushland areas.

59




xv. Development must demonstrate consideration of the Bushland Plan of Management (POM). In particular, development must meet the objectives of this POM.

Heritage

- xvi. All development must be in accordance with the Conservation Management Plan (CMP), Archaeological Management Plan (AMP) and any relevant Specific Elements Conservation Policy (SECP) and must demonstrate that:
 - new buildings maintain an appropriate setting for the Historic Precinct including significant buildings and landscape features in the vicinity such as the Flowers Wards and the Heffron and Delaney Buildings;
 - view corridors from the central axes of Flowers Wards 5 and 6 are recovered and maintained; and
 - the significant quarried sandstone pieces will be conserved and incorporated into the landscaping for the Southern Local Park.



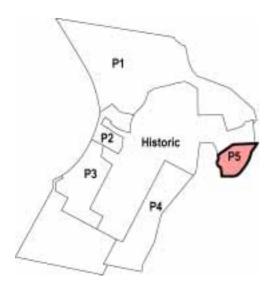

7.5 Precinct P5

Precinct P5 is located on the eastern side of the DCP area at the end of Pine Avenue. It is bound by the Historic Precinct to the north and the Coast Golf Course to the east, south and west.

This precinct will contain a community centre, to serve the needs of residents and the surrounding suburbs, as well as specific needs such as cultural facilities, as part of Council's program for integrated, multi-purpose community facilities across Randwick City. This precinct has a close visual relationship with the Chapel (within the adjoining Historic Precinct) and the coast.

Precinct Objectives

- To provide for a multi purpose community centre for the residents of the Prince Henry site and beyond.
- To ensure that the community facility becomes a model development in terms of sustainable development.
- To ensure that new development sits within the landscape and that the visual prominence of the Chapel is retained.
- To retain the open landscape character of the Prince Henry site.

Desired Character

This precinct will contain a new multi-purpose community centre. The design emphasis will be on enhancing the existing landscaping along access roads and the golf course edges and to soften the appearance of the proposed community building.

The community and recreation uses of this building may require a building form that differs quite substantially from other buildings (new and existing) on the Prince Henry Site. The new building must not however dominate the landscape or compete with the nearby Chapel when viewed from within the site or from the coastline, nor should it block significant views to the coastline.

Accordingly, the built form will comprise a combination of indoor and outdoor spaces that relate to the topography of this part of the site and which offer opportunities for enhancing the existing landscaping. This may result in a single building, but may also result in a number of linked buildings and/or ancillary buildings.

The building will incorporate a range of measures, which set the highest benchmark in terms of sustainable development, all of which are suitably integrated into its design.

Landscaping will retain the open grassy character of the site, with local, drought-tolerant native plant species.



Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

 Building heights, FSR and landscaped areas are to comply with the Built Form Control Table.

<u>Note</u>: Maximum height and FSR may not be able to be achieved in all instances; however the requirements for minimum landscaped areas **must** be achieved in all instances.

- ii. Development is to comply with the minimum setbacks and alignments shown in Figure 17 Precinct P5.
- iii. The building envelope in Figure 17 is indicative only, and may vary subject to compliance with these controls at DA stage.
- iv. Building frontages are to be aligned with street frontages.
- v. New buildings should be of a scale that does not dominate the landscape or visually compete with the Australian Nurses War Memorial Chapel. Refer to Figure 17 for building alignment requirements.
- vi. A full range of passive and active sustainable design measures are to be incorporated into the community facility building to maximise opportunities for renewable energy use and minimise demand for water and other finite resources.
- vii. The development of the Community Centre is to be in accordance with the Developer Agreement.

Landscaping

viii. Significant landscape elements such as cultural plantings are to be conserved. Landscaping in this precinct should complement that in the adjoining Historic Precinct.

Heritage

- vix. All development must be accordance with the Conservation Management Plan, Archaeological Management Plan and any relevant Specific Elements Conservation Policy and must demonstrate that:
 - the new building(s) maintain an appropriate setting for the Historic Precinct including significant buildings and landscape features in the vicinity, including the Interdenominational Nurses War Memorial Chapel, and Pine Avenue; and
 - excavation in the possible extent of the palaeovalley area should not go below RL 26 unless endorsed by Randwick Council and the NSW Heritage Office.





7.6 Historic Precinct

The Historic Precinct comprises the centre of the DCP area and contains the majority of the existing built and landscape heritage elements that contribute to the heritage significance of the Prince Henry Site, representing the key elements of the former Coast Hospital and Prince Henry Hospital.

Precinct Objectives

- To conserve the heritage significance of the Historic Precinct and it's setting.
- To conserve significant built and landscape elements while adapting them to suitable new uses.
- To ensure that new development respects the historic structure and layout
 of the precinct and relates sympathetically to significant built and landscape
 elements within the precinct.

Desired Character

This precinct will accommodate a variety of residential development, community uses, and housing for older people. This will be achieved largely by appropriate adaptation of existing significant buildings, areas of sensitive 'infill' development, complemented by areas of open space.

Significant built and landscape heritage elements within the Historic Precinct will be conserved. Aboriginal and Historical archaeological relics and sites within the precinct will be managed, recorded and conserved as appropriate.

The streetscape of the Historic Precinct will continue to be strongly influenced by the many retained built and landscape heritage elements as well as the existing road structure and layout. Pine Avenue and its Norfolk Island pine trees will continue to be the dominant landscape element. The structure and general layout of the precinct will be retained, together with the open character of the landscape.

Development within the Historic Precinct will primarily comprise conservation and adaptation of existing heritage buildings on site (for residential, community and small scale local retail uses), with small pockets of new development.

New development within the northern part of the Historic Precinct will comprise a single storey detached dwelling (Lot 12) at the south-western end of the existing Artisans Cottages, and 3-4 storey apartment buildings along the northern side of Pine Avenue (Lots 9 and 10), adjacent to former hospital buildings of similar scale.

At the southern end of the Historic Precinct, the DCP makes provision for an extension to the Delaney Building (Lot 32). The minimum landscape area requirements for this lot are lower due to its proximity to the Southern Local Park and the remnant bushland at the southern end of the DCP area. The remnant bushland will provide a "green outlook" for residential development on this Lot, giving the perception of substantial open space, while the Southern Local Park will provide accessible open space for passive and small scale active recreation. The existing Delaney building influences the south-facing location of the extension allowed and the location of open space on this lot, which is atypical and does not establish a precedent for other lots.

It is important that new development complements the established character of the precinct by having a compatible scale and architectural character, and through careful consideration of the spaces between buildings.



Performance Criteria and Controls

In addition to the performance criteria and controls contained in the general sections of this DCP the following performance criteria and controls also apply to development within this precinct:

Built Form

 Building height, FSR, and landscaped area for all lots in the Historic Precinct is to comply with the controls set out in the Built Form Control Table.

<u>Note</u>: Maximum height and FSR may not be able to be achieved in all instances; however the requirements for minimum landscaped areas **must** be achieved in all instances.

- ii. The maximum height of the extension to the Delaney Building (Lot 32) must not exceed the existing ridge height of the Delaney Building (see Figure 20), with a minimum floor to ceiling height of 2.7 metres for all floors.
- iii. New developments are to be in accordance with the policies contained within the Conservation Management Plan (CMP), Archaeological Management Plan (AMP), and any relevant Specific Elements Conservation Policies (SECP).
- Development is to comply with the setbacks and 'match building alignment' controls identified on Figures 18-19.
- v. Development is to demonstrate that views (both from the private <u>and</u> public domain) identified on Figures 18-19 are maintained. Details of the view analysis are to be included at DA stage.
- vi. New buildings should respect the blocky rectilinear form of the most significant buildings such as the Flowers Wards and the Matron Dickson Nurses Home without mimicking their character or appearance.
- vii. New buildings should be designed so they are appropriate in terms of their character, scale, massing, materials and details, setback and orientation to the existing buildings and spaces within the Historic Precinct.

Landscaping

- viii. Landscape planting is to complement and not compete with the highly significant plantings of Norfolk Island Pine trees along Pine Avenue.
- The historically open character of the landscape in the precinct should be retained.
- x. New planting should be in accordance with the suggested species list included as **Appendix A**.

Heritage


- xi. All development must be accordance with the Conservation Management Plan (CMP), Archaeological Management Plan (AMP), and any relevant Specific Elements Conservation Policy (SECP), and must demonstrate that:
 - historic and visual relationships of buildings and groupings of buildings are retained:
 - the symmetry and axial siting of the Flowers Wards and Heffron and Delaney buildings is respected and reinforced;
 - view corridors from the Flowers Wards and the visual link from Coral Avenue to the former Matron Dickson Nurses Home are opened up;
 - the visual prominence of the Clock Tower and the Chapel as viewed from Pine Avenue is maintained;
 - new buildings along Pine Avenue follow the road alignment and the alignment of the early road from Pine Avenue to the former Institute of Tropical Medicine;





- that adequate curtilages and settings are defined, protected and maintained around significant buildings, groups of buildings and spaces;
- that a consistent approach to the conservation of the Flowers Wards and their settings is maintained; and
- excavation of the palaeovalley should not go below RL 26 unless endorsed by Randwick City Council and the NSW Heritage Office.

Parking

xii. Where surface parking is provided within private lots within this precinct, it is not to detract from the setting of significant buildings.

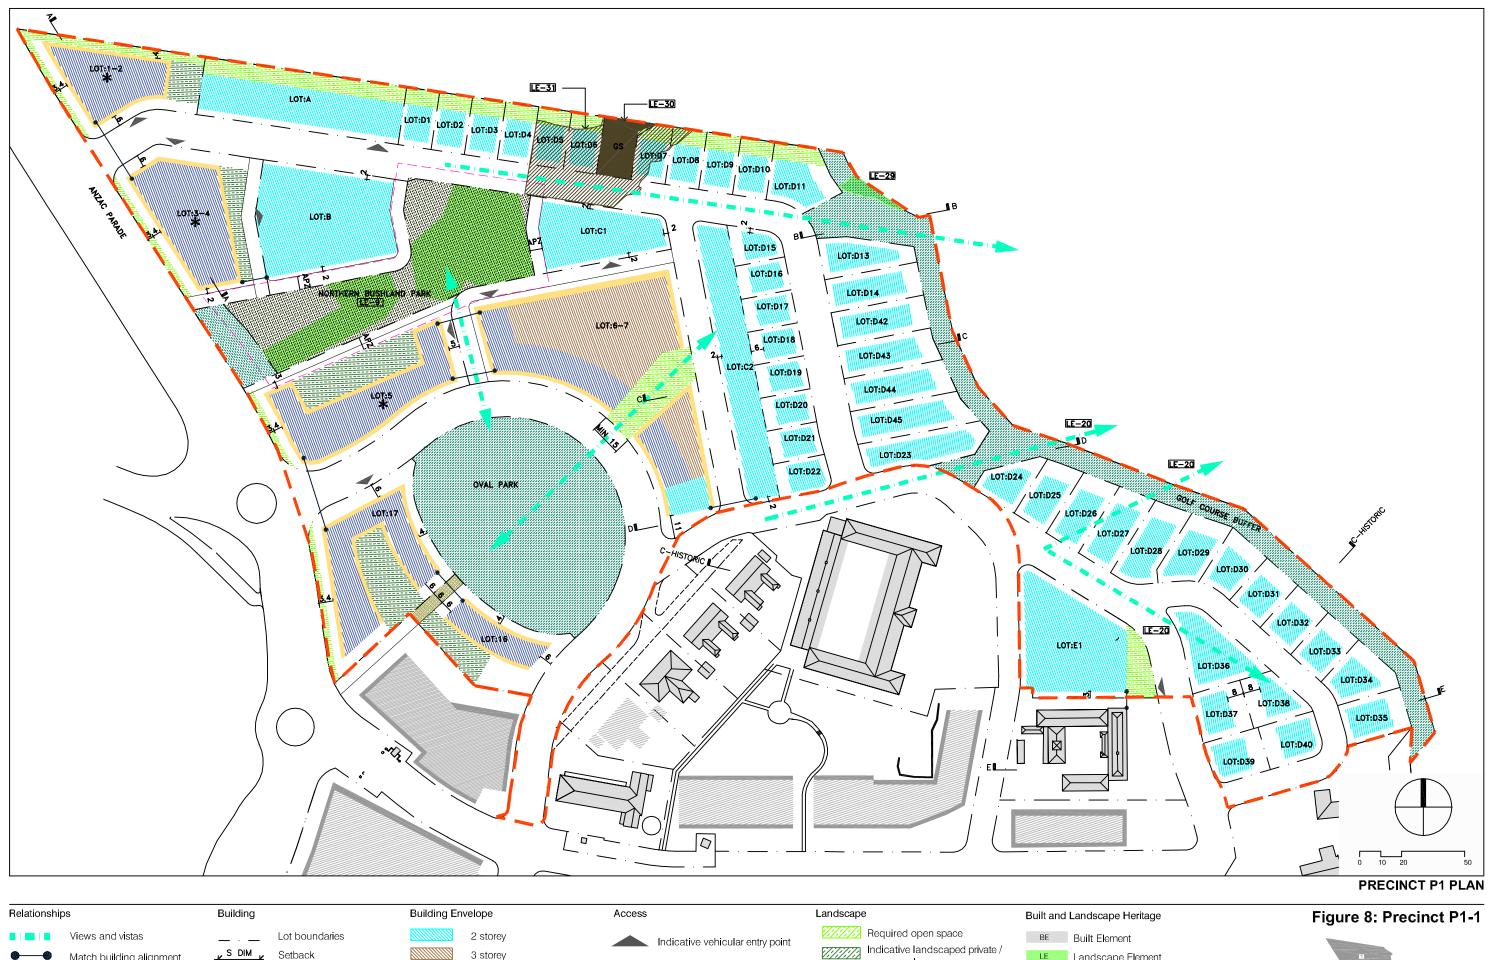

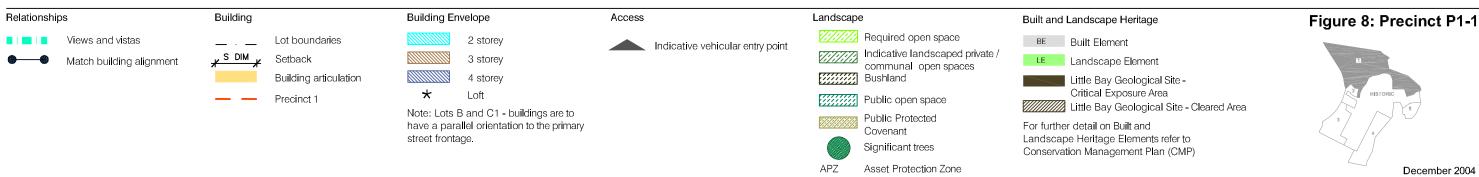

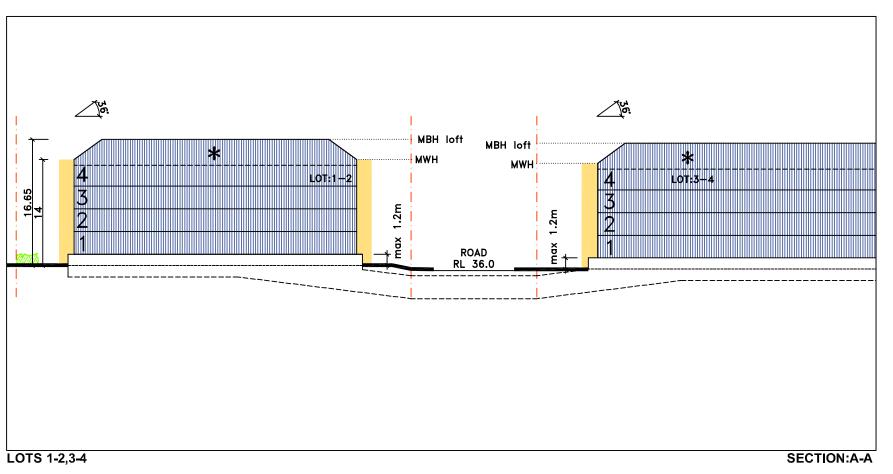

LOTS 6-7,C2,D19,D43

Building articulation

Indicative carparking

Maximum Wall Height Maximum Building Height

Existing RL

4 storey


Loft

Building

, S DIM

MWH

MBH

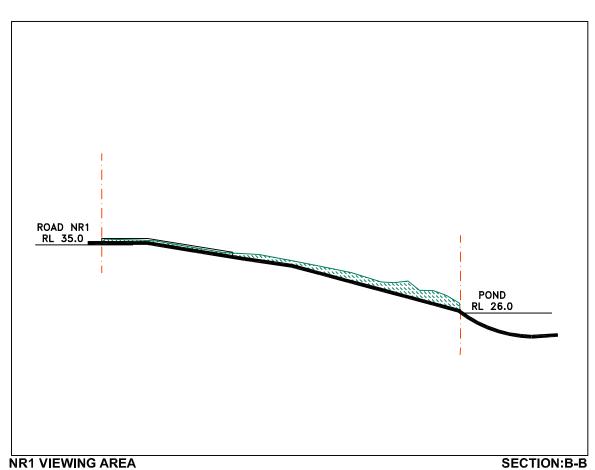

MBH 2 LOT:043 2 LOT:045 2

Edit boundaries
Setback

Edit Sorrey

Landscape

Notes

Figure 9: Precinct P1-2

Lot 6-7-southern part of site limited to 2 storeys, eastern part of site limited to 3 storeys.


Figure 9: Precinct P1-2

Lot 6-7-southern part of site limited to 2 storeys, eastern part of site limited to 3 storeys.



December 2004

SECTION:C-C

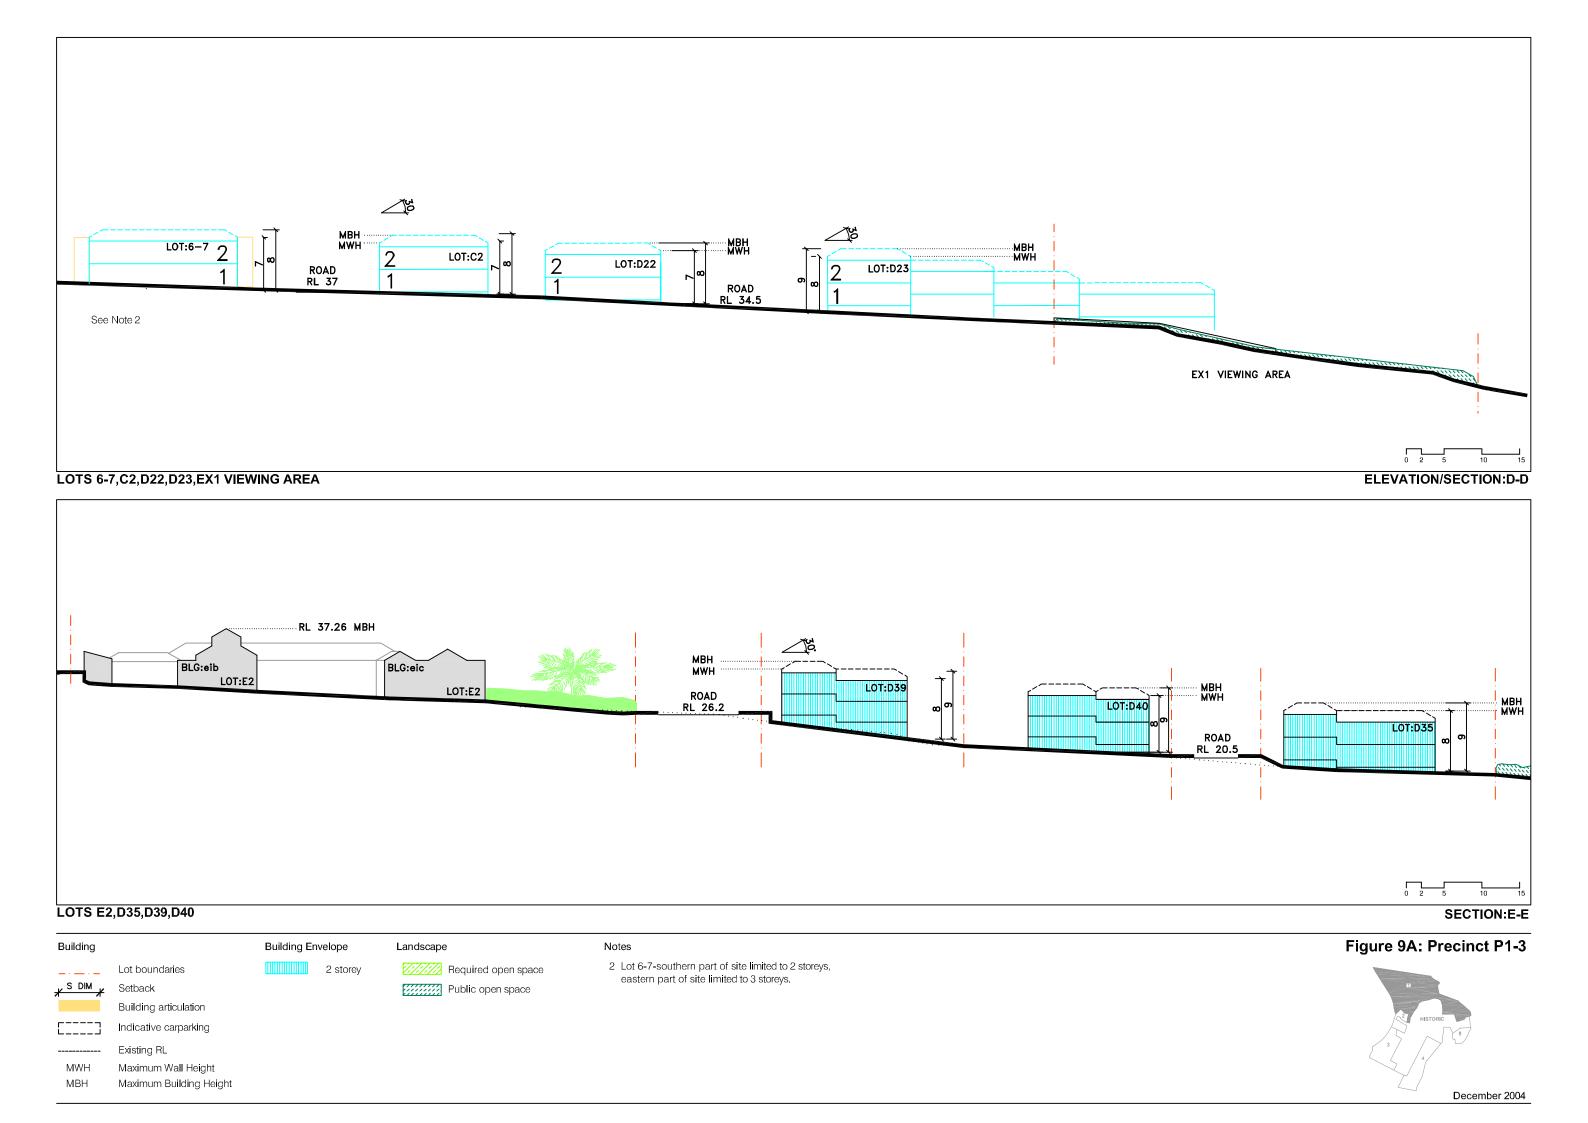



Public pathway

Public Protected Covenant

Indicative vehicular entry point to Henry's Trading Post (Lot23-2 Historic Precinct)


4 storey

Building articulation

Precinct 2

HISTORIC 5

For further detail on Built and Landscape Heritage Elements refer to Conservation Management Plan (CMP)

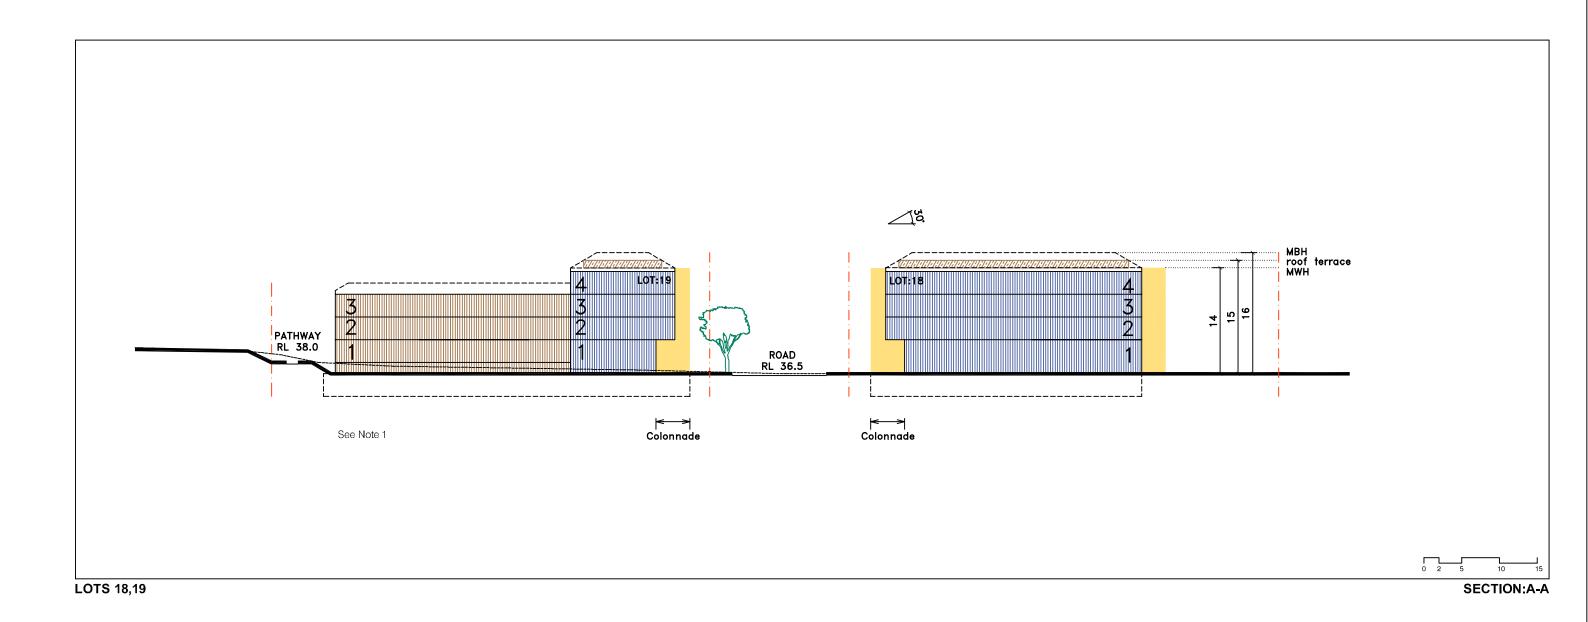

Building Envelope Landscape Notes

Lot boundaries 3 storey Roof terrace 1 Lot 19-eastern part of site limited to 3 storeys.

Setback Building articulation Undicative carparking Indicative carparking


Existing RL


Maximum Wall Height


Maximum Building Height


MWH


MBH

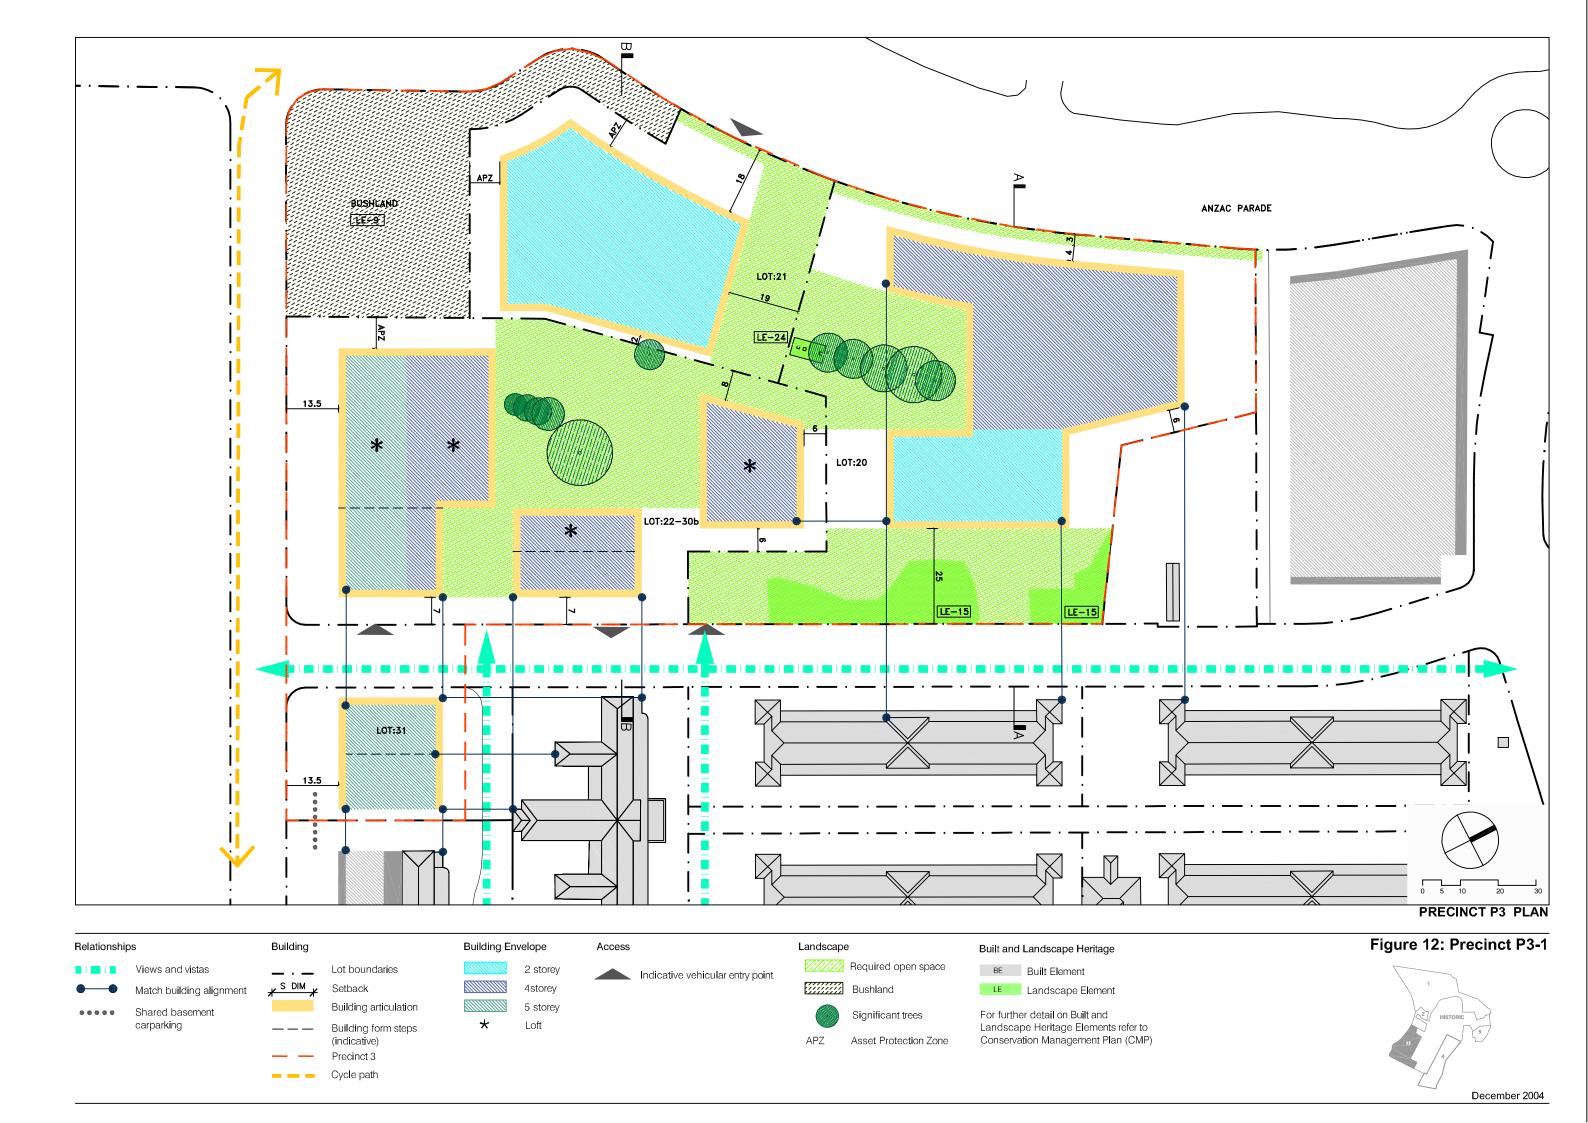

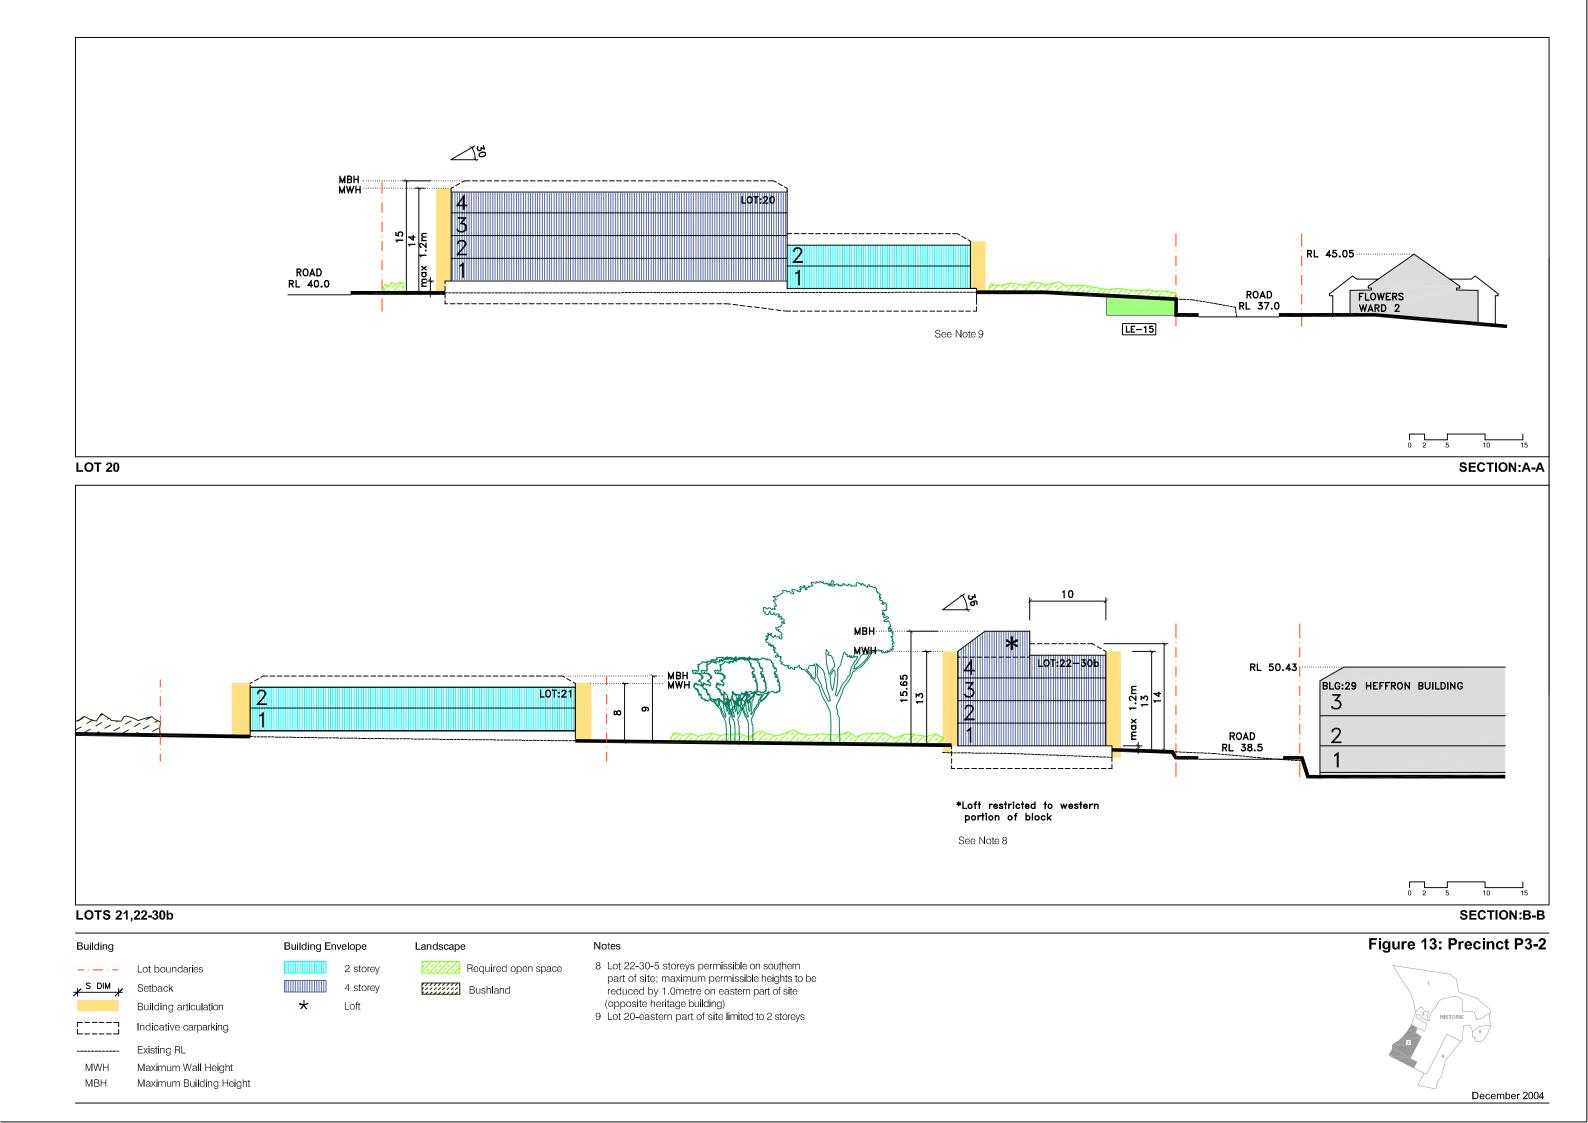

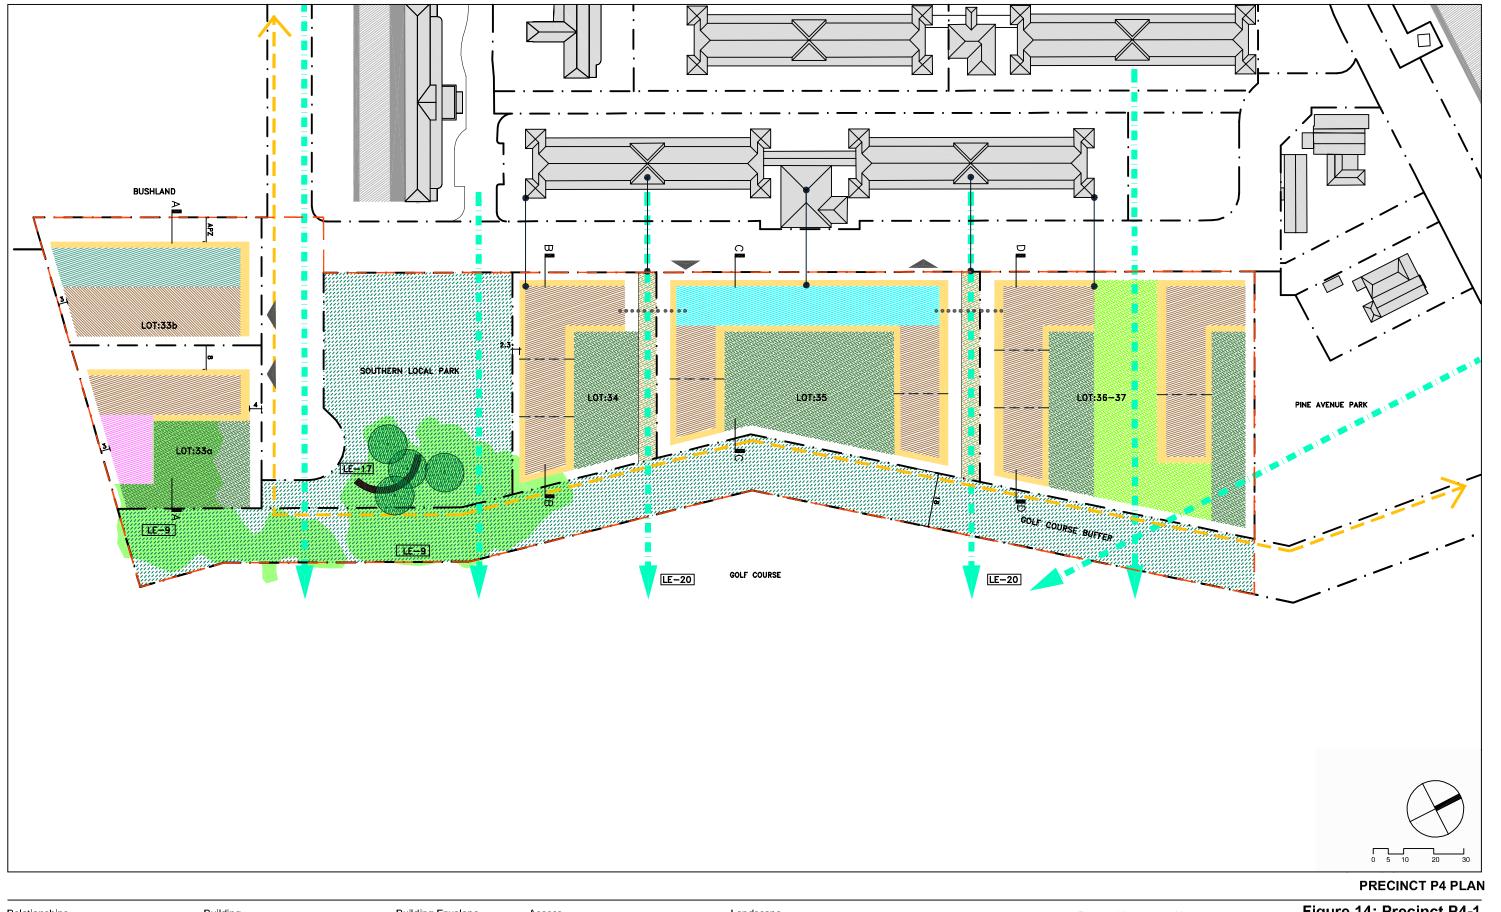


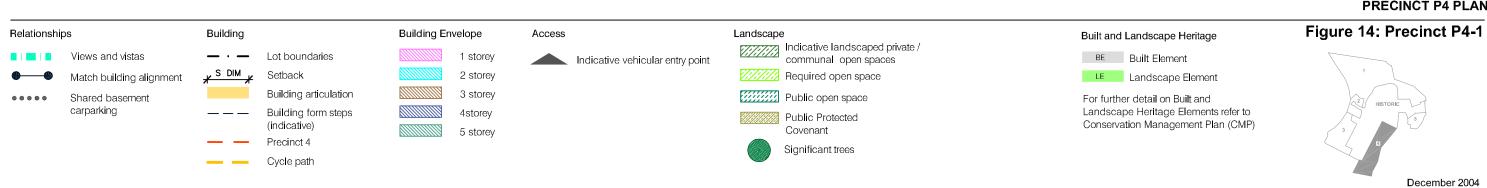


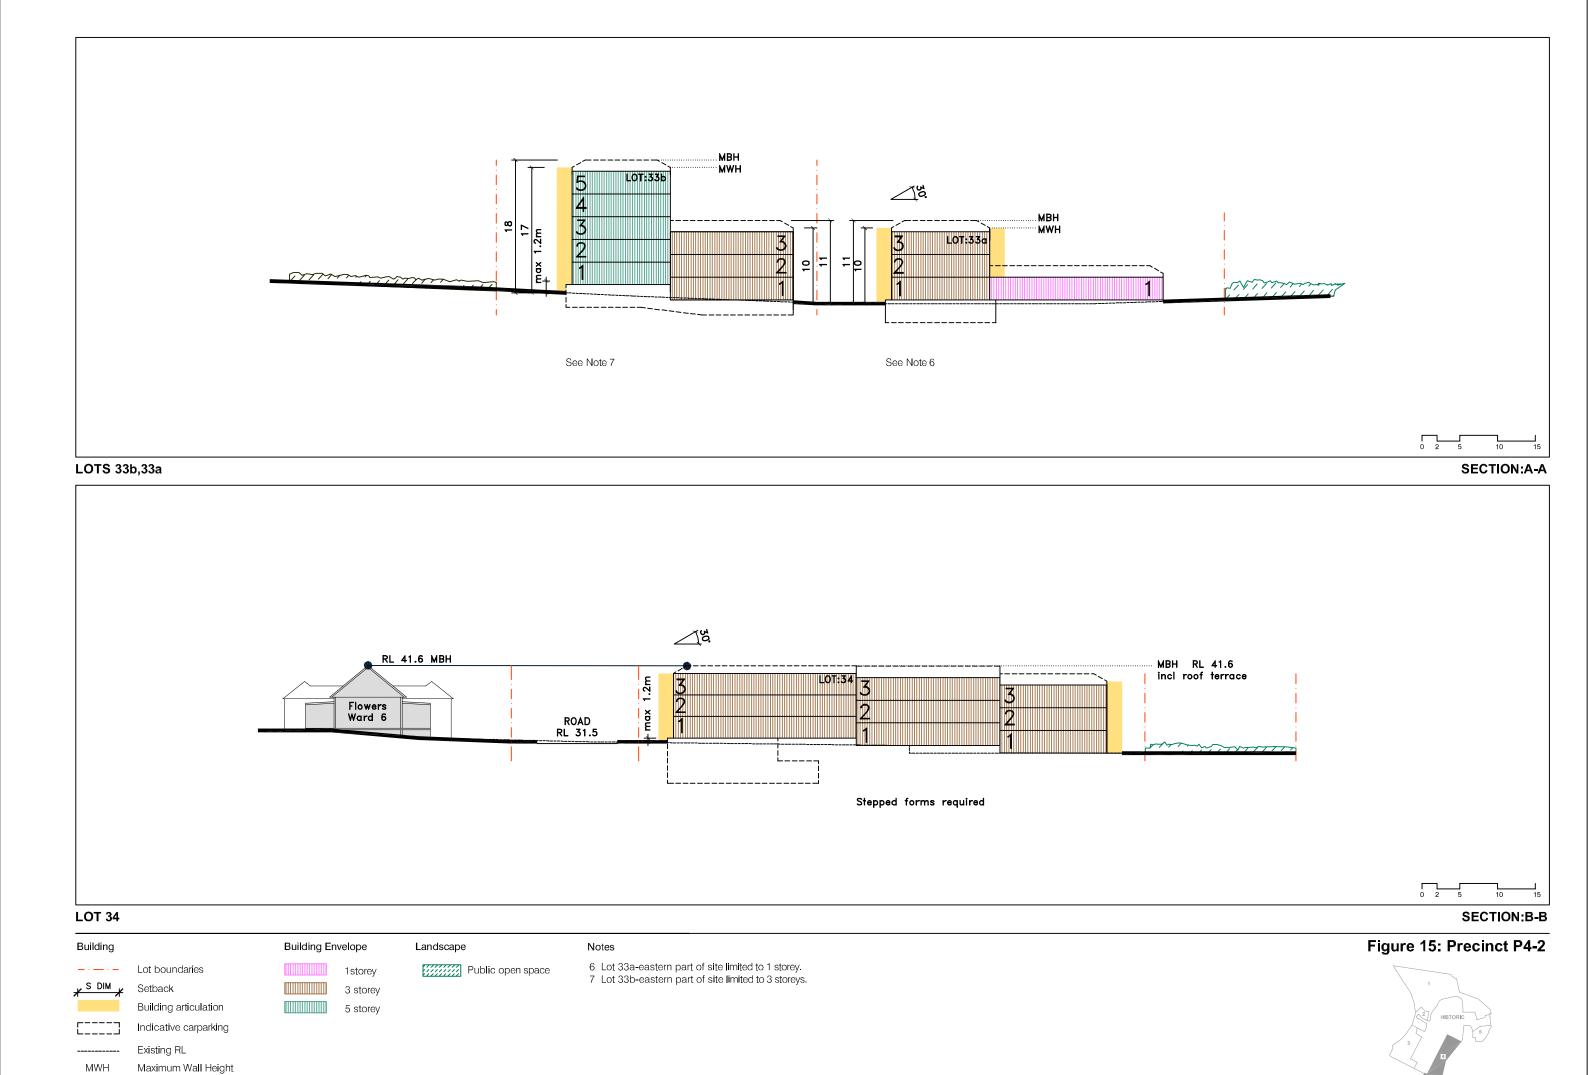



MBH

Maximum Building Height

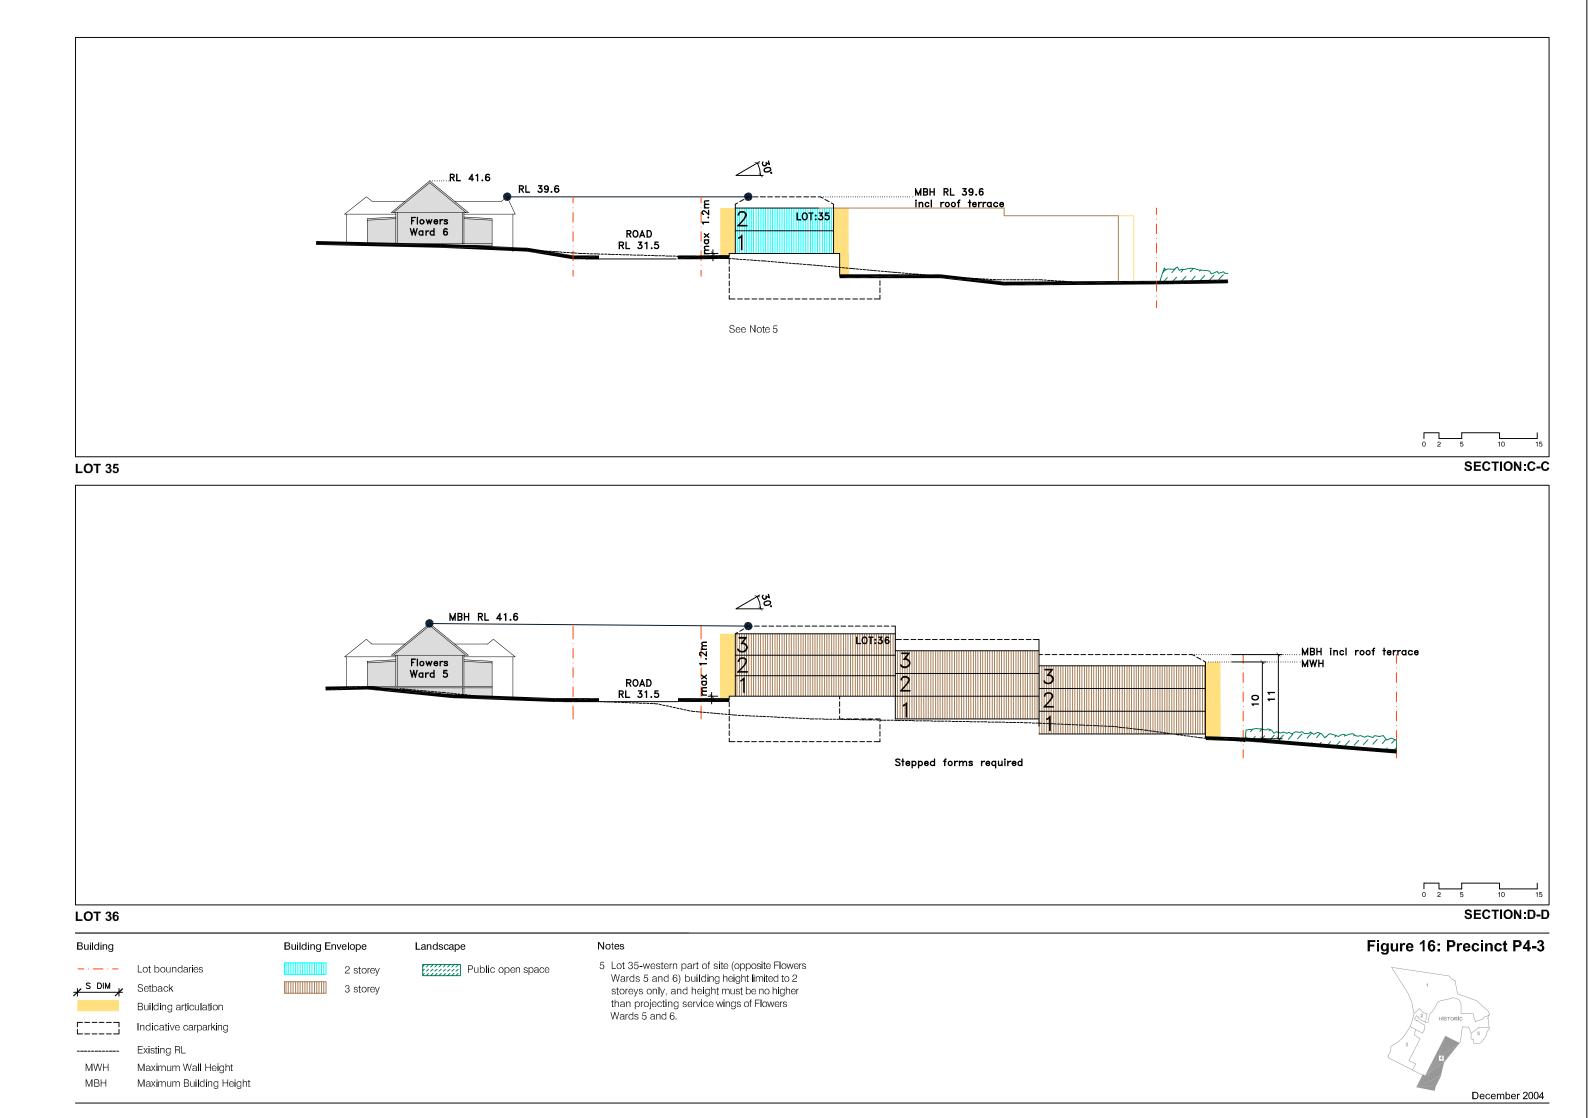

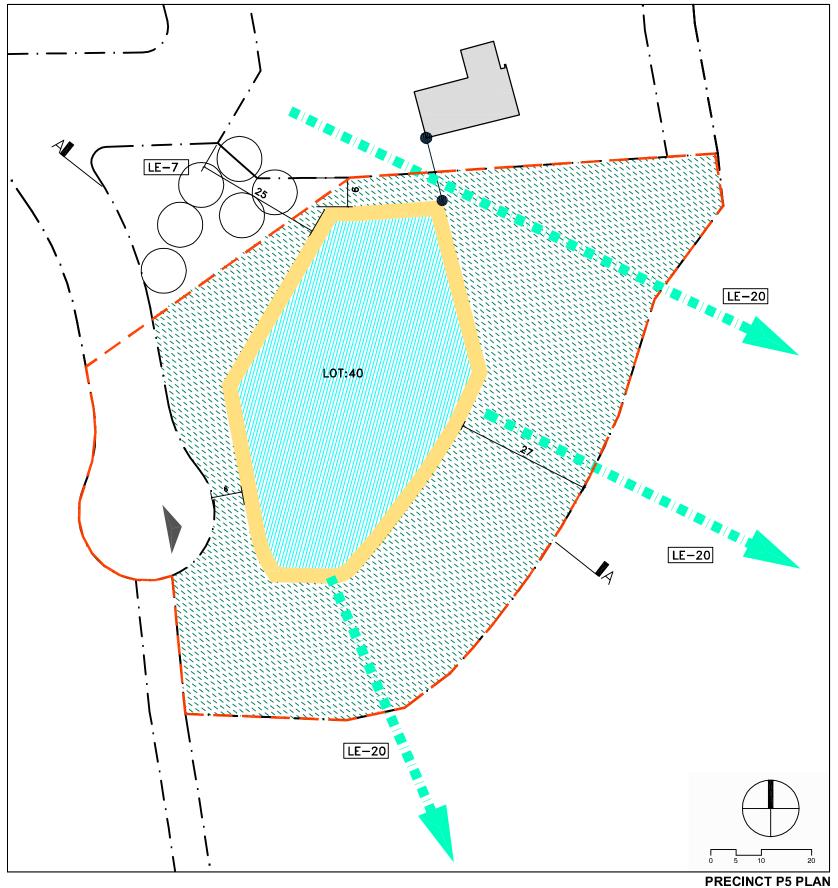

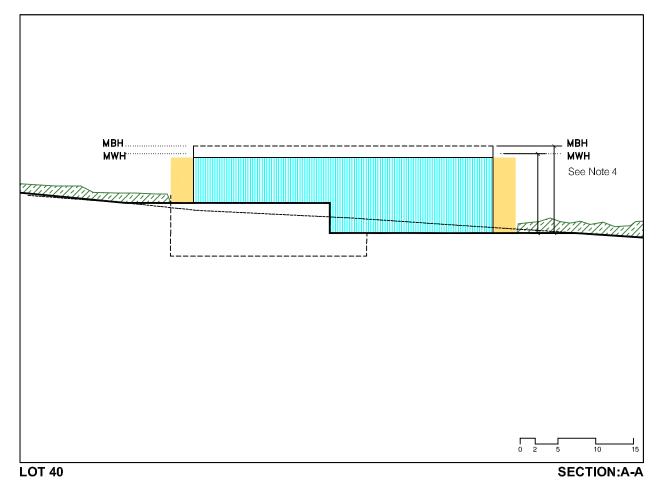

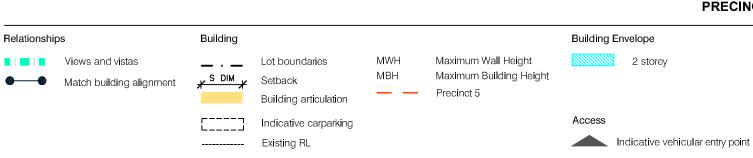

Landscape
Public open space


For further detail on Built and Landscape Heritage Elements refer to Conservation Management Plan (CMP)


Note


4 Lot 40-maximum permissible heights may be increased to accommodate functions of community centre.


Figure 17: Precinct P5



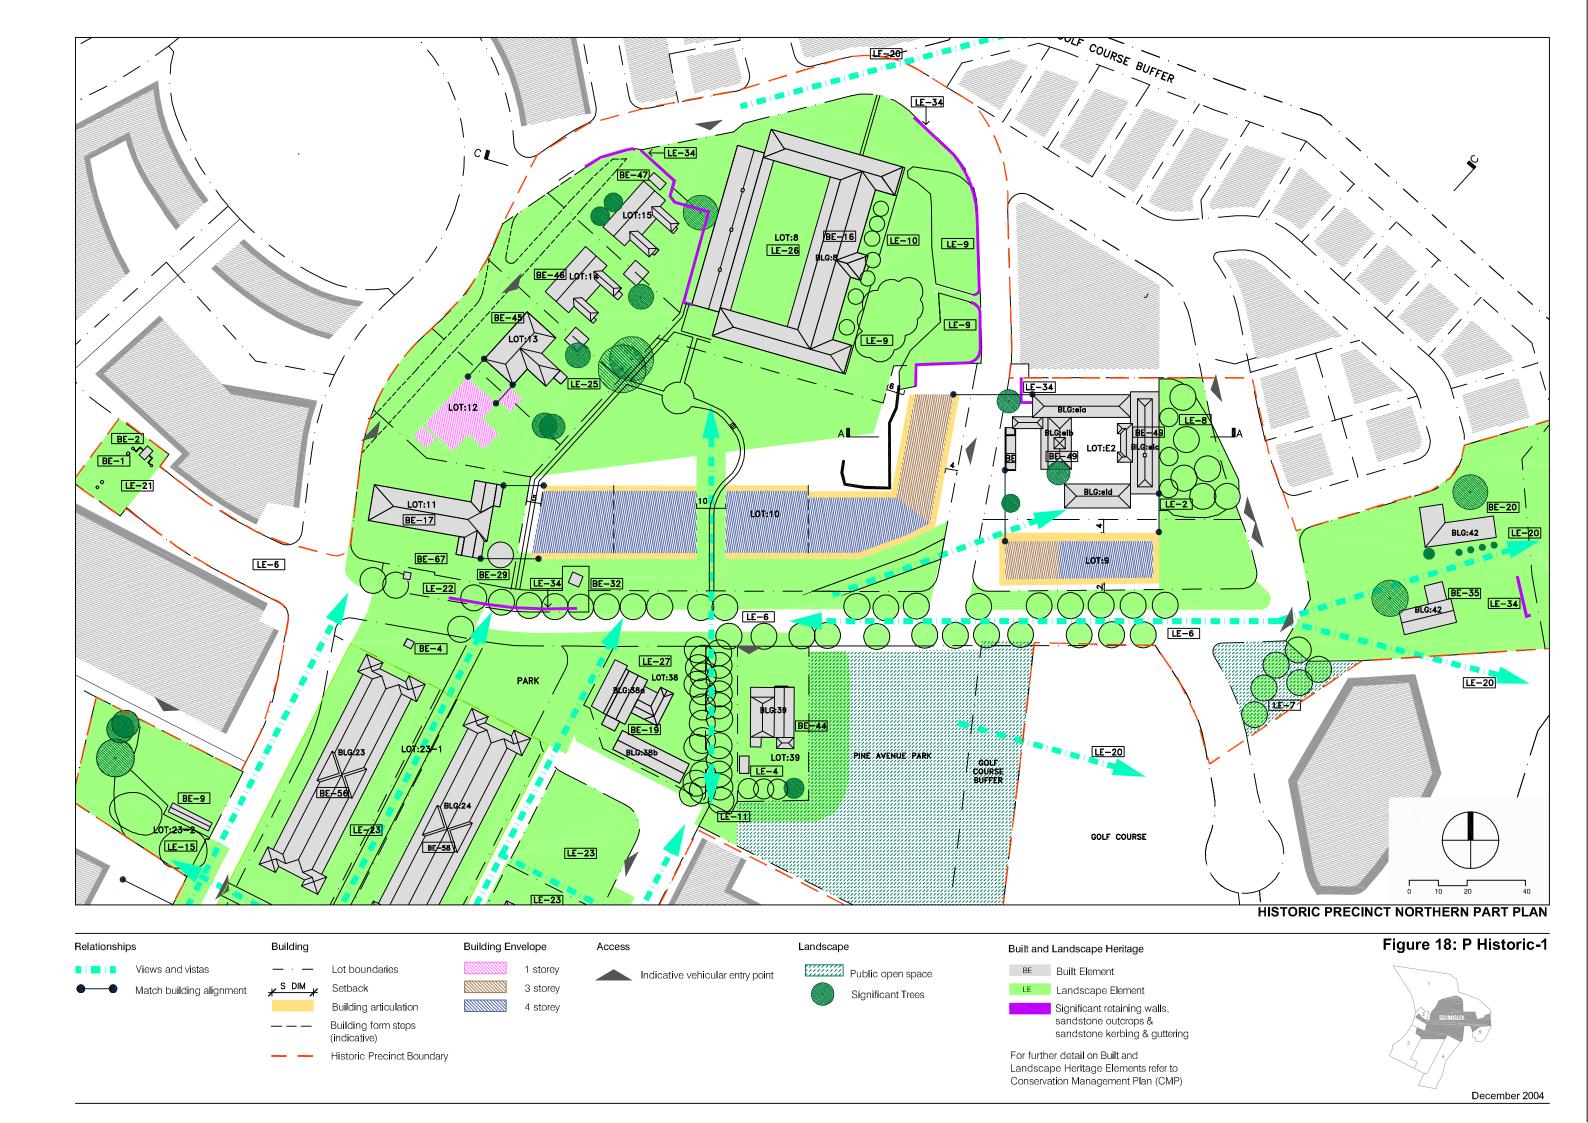

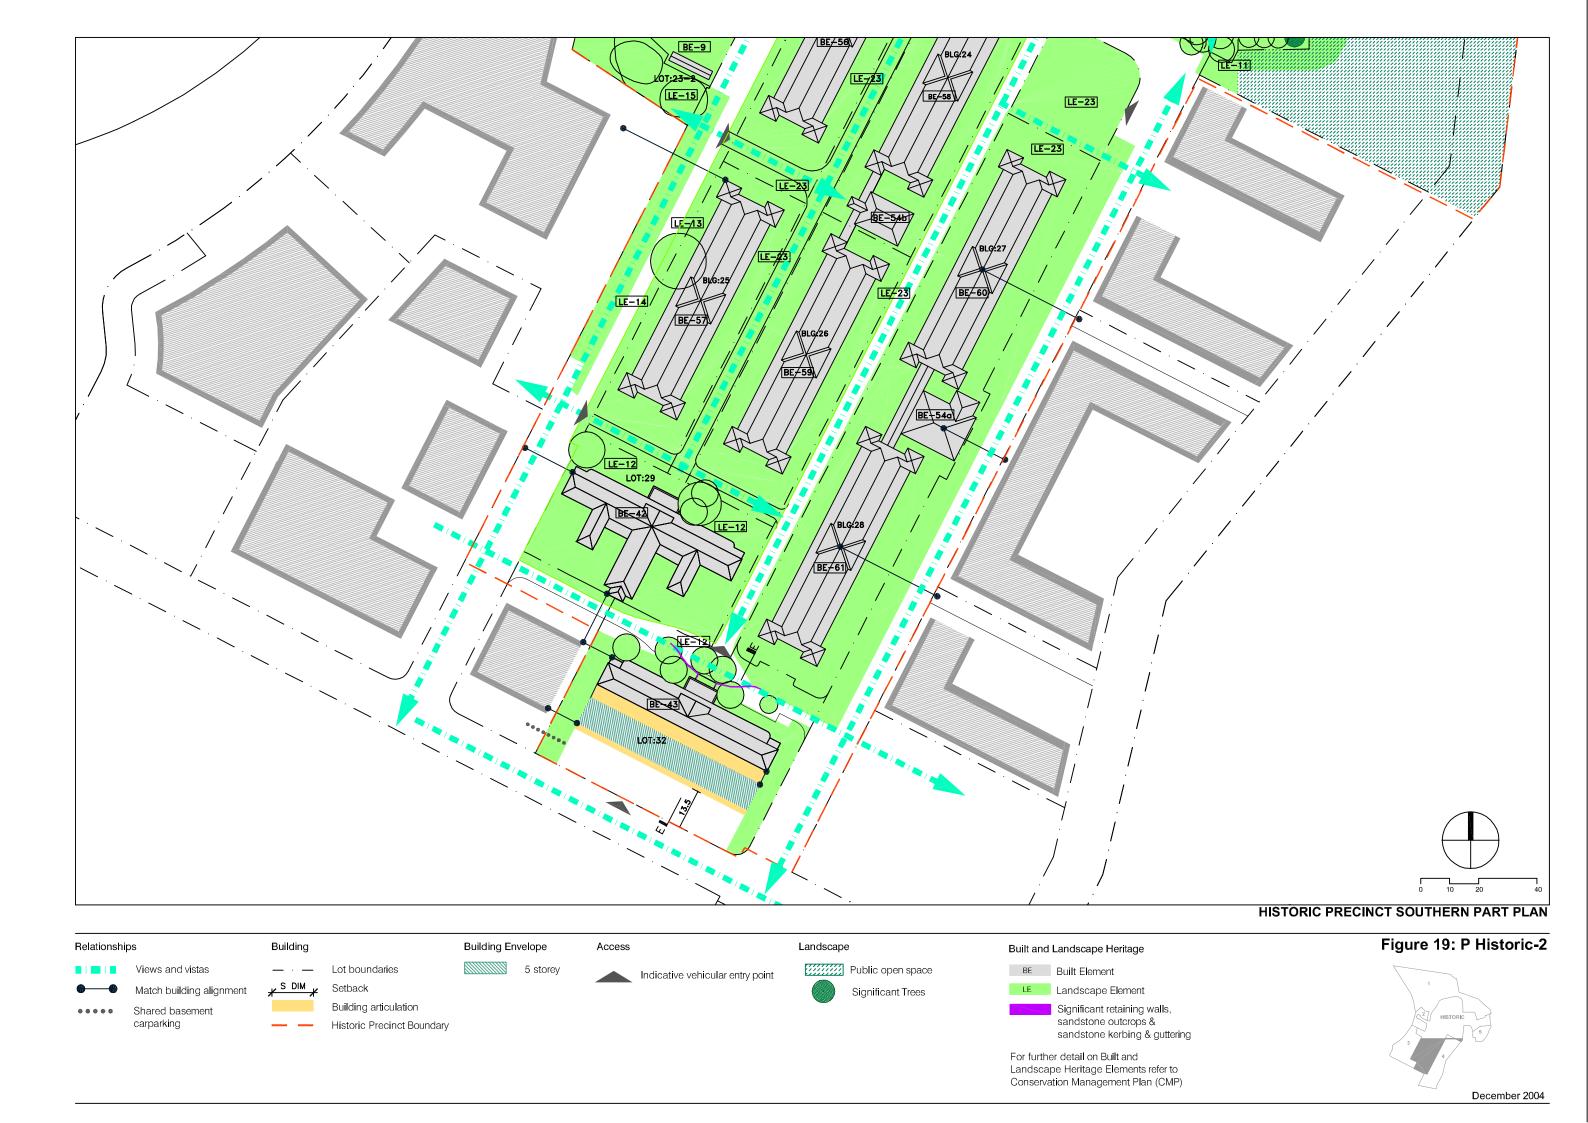

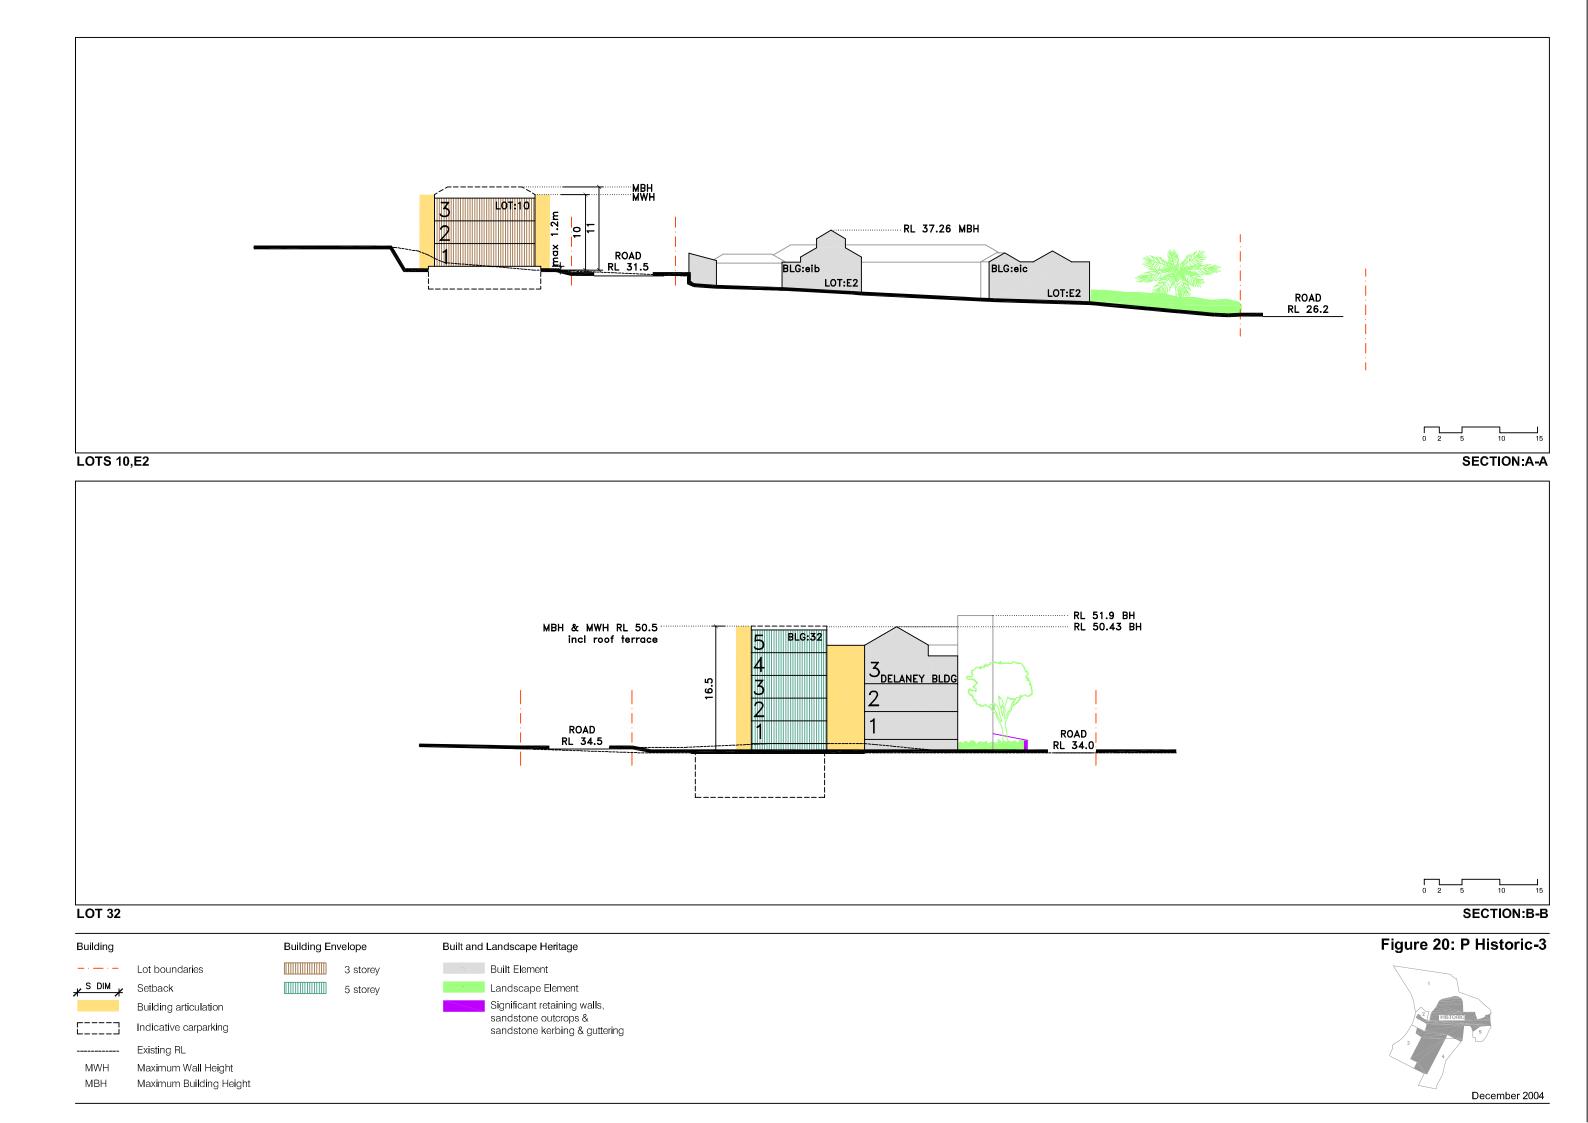

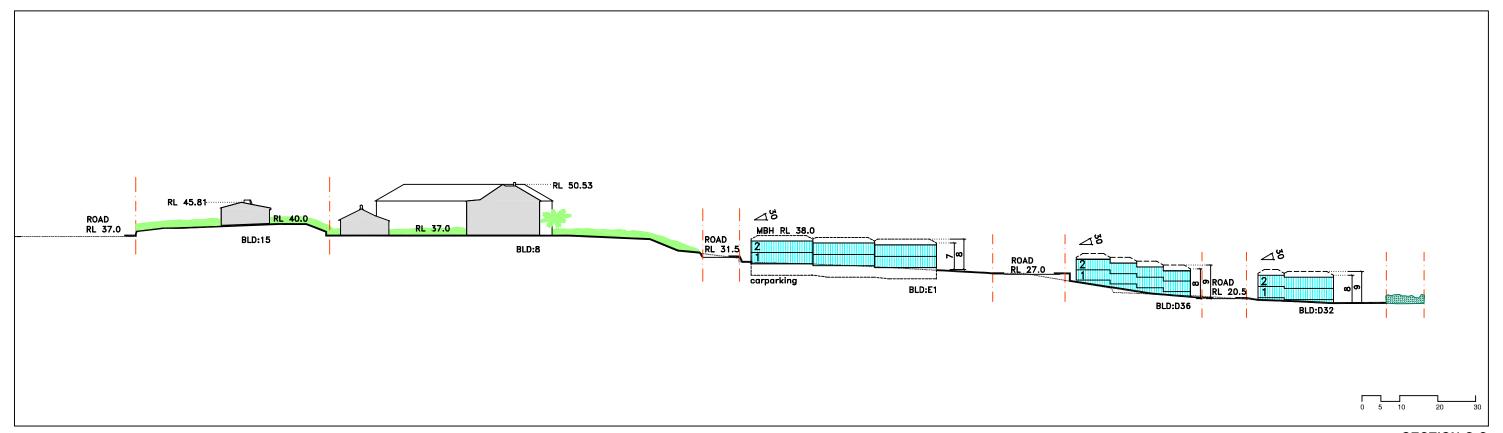

LOTS 15,8,E1,D36,D32





DEFINITIONS

Asset Protection Zone

(APZ) is an area of land that is not built upon. The APZ is measured from the edge of the identified bushland to the edge of the building. It can include roads and open space.

Building depth

is the horizontal cross section dimension of a building, which is generally measured from front to back (ie from the street side of the building to the inside of the block)

Building envelope

for a site, is the three dimensional space within which development may take place. It is defined by combining building height, building depth, setback, and landscaped area controls for the site.

Building height

means the vertical distance from the highest point on the building to the ground level and includes ancillary services, installations and works (including works to conceal and integrate services) unless the council is satisfied that they will not adversely affect the amenity of adjoining or nearby land.

Dwelling house

A building containing one (but not more than one) dwelling whether attached or not.

Floor space ratio

The ratio of the total gross floor area of all buildings (existing and any proposed) to the site area.

Gross floor area

The sum of the areas of each level of a building where the area of each level is taken to be the area within the inner face of the external enclosing walls and the area of any attic measured at 2.1 metres above floor level of the attic, excluding:

- (a) columns, fin walls, shading devices, awnings, balconies and any other elements, projections or works outside the general lines of the outer face of the external wall, and
- (b) lift towers, cooling towers, machinery and plant rooms, and air-conditioning ducts, and
- (c) associated car parking and any internal vehicular or pedestrian access to that parking (to ground level), and
- (d) space for the loading and unloading of goods.

Ground level

in relation to land shown edged heavily on the map marked 'Randwick Local Environmental Plan 1998 (Amendment No. 28)' means the ground level that exists after completion of the initial redevelopment earthworks and re-contouring of the site as determined by that development consent issued for the land.



L_{Aeq (1hour)}

represents the highest percentile hourly A-weighted $L_{\rm eq}$ during the period 7am to 10pm or the period 10pm to 7am (whichever is relevant). If this cannot be defined accurately, use the highest hourly A-weighted $L_{\rm eq}$ noise level (Environment Protection Authority's Environmental Criteria for road traffic noise).

Landscaped Area

The part of a site area which is used, or capable of being uses, for outdoor recreation or garden uses (such as lawns, gardens, unroofed swimming pools, clothes drying areas, barbeque areas, footpaths and the like) and includes landscaped podium areas and water tanks located at the ground level. It does not include areas used for parking, driveways, balconies, rooftop gardens or areas used for garbage or recycling material storage or sorting.

Multi unit housing

Two or more dwellings, whether or not attached.

Riparian land

means any land which adjoins, directly influences, or is influenced by a body of water, such as a watercourse or wetland.

Wall height

means the vertical distance from the highest point on an external wall to the ground level of that site. Each external wall height measurement must include gable ends and attic walls with an area over 6m² and dormer windows that protrude horizontally from the roof more than 2.5 metres.

Watercourse

means a stream of water or channel, marked on the map, whether perennial or intermittent, flowing in a natural channel, or a natural channel artificially improved, or in an artificial channel, and any branch or other stream into or from which any such stream flows, and in the case of a stream running to the sea or into a coastal bay inlet or coastal lake, includes the estuary of the stream influenced by tidal waters.



Prince Henry DA Checklist The following information is required when submitting a development application for the Prince Henry site:
Site analysis, including view analysis
Is the proposed development Integrated Development? If yes, relevant copies of plans, fees are to be provided
Heritage Impact Statement if applicable, which addresses any relevant Conservation Management Plan (CMP), Archaeological Management Plan (AMP) and Specific Elements Conservation Policy (SECP)
Landscape Plan, including: proposed species (predominance of local natives and drought resistant species) How the proposed design responds to site microclimate
Shadow Diagrams , including: elevations showing shadow impacts on any walls (and windows) of adjoining development and any remnant bushland.
Economic analysis if applicable
Noise and Vibration Impact Assessment Report if applicable
Crime Risk Assessment For all developments of 20 or more new dwellings. Consistent with DIPNR's Crime Prevention and the Assessment of Development Applications guidelines (or any update).
Sample Board Showing proposed colours, materials and finishes
Waste Management Plan
consistent with Randwick City Council's Waste Management Plan – Part A (and any other relevant guidelines or update), and the Better Practice Guide for Waste Management in Multi Unit Dwellings, Resource NSW Feb 2002 (or any update)
Consideration of any relevant Plan of Management (POM)
Environmental Education toolkit
that outlines the sustainable features of the development (for distribution to residents and employees) including Transport Access Guide component – required for developments comprising 3 or more dwellings
BASIX Certificate (single dwellings)
Sustainable Building Report ¹ (for multi unit and mixed use development), including:

- energy efficiency NatHERS certificate
- Total Water Cycle management (including stormwater)

Development Control Plan 2004

¹ It is noted that State Environmental Planning Policy (SEPP) – Building Sustainability (BASIX) will replace these requirements when it comes into effect for multi unit housing (Stage 2). It is anticipated that this will occur in October 2004. Applicants are advised to check with Council officers prior to DA lodgement.



ACKNOWLEDGEMENTS

Randwick City Council

Landcom

Gary Shiels and Associates (GSA Planning)

Godden Mackay Logan Heritage Consultants

PTW Architects



Appendices

Appendix A	List of species		
Appendix B	Bushfire Risk Management Report (2001), NSW Bushfire Brigades, Specialised State Operations Bushfire/Natural Hazards Section		
Appendix C	Map extracts from the Archaeological Managemen Plan and the Conservation Management Plan		
Appendix D	Total Water Cycle Strategy		
Appendix E	Watercourse Categories and Riparian Land Widths		
Appendix F	Specific Elements Conservation Policies (SECP)		



Appendix A

Recommended list of suitable native species Prince Henry

Appendix A

Recommended list of suitable native species for landscaping Prince Henry Site, Little Bay

Trees:

Banksia integrifolia
Casuarina cunninghamiana
Casuarina glauca
Eucalyptus eugenioides
Eucalyptus parramattensis
Eucalyptus piperita
Eucalyptus punctata
Eucalyptus robusta
Eucalyptus sieberi
Eucalyptus tereticornis
Melaleuca decora
Melaleuca styphelioides
Tristaniopsis laurina

Shrubs:

Angophora hispida Baeckea imbricata Banksia marginata Banksia paludosa Banksia spinulosa Bauera rubioides Boronia pinnata Callistemon viminalis Correa alba Grevillea 'Superb' Melaleuca hypericifolia Myoporum boninense Olearia tomentosa Ozothamnus diosmifolius Phebalium squamulosum Prostanthera incisa Prostanthera rhombea Westringia fruticosa

Groundcovers:

Brachycome multifida
Carex appressa
Carex fascicularis
Carpobrotus glaucescens
Chrysocephalum apiculatum
Crinum pedunculatum
Dianella congesta
Dichondra repens
Doryanthes excelsa
Grevillea X gaudichaudii
Isolepis nodosa
Myoporum parvifolium
Poa labillardieri
Scaevola aemula
Viola hederacea

The species in this list are generally suitable for dry, windy, coastal sites with nutrient-poor soils. They require relatively little maintenance. The trees and shrubs do not have fleshy fruits, so as not to promote the spread of larger, more aggressive birds, which may result in the loss of smaller native species.

The list has also been compiled to address the provenance issue, as it relates to the potential loss of genetic biodiversity, due to use of non-local provenance planting material. Hence, only a few native species present in bushland in the vicinity of the Prince Henry site have been chosen for this list.

Plants on this list can be used without restriction, provided that they are compatible with the setting of heritage buildings and the open character of the landscape and the retention of significant views.

Other non-local native plant species can be planted providing they are not invasive.

Exotic plant species can be planted providing they are not invasive and are not used extensively.



Appendix B

Bushfire Risk Management Report (2001), NSW Bushfire Brigades, Specalised State Operations, Bushfire/natural Hazards Section

NEW SOUTH WALES FIRE BRIGADES SPECIALISED STATE OPERATIONS

Amarina Avenue GREENACRE NSW 2190
Private Locked Bag 13 GREENACRE NSW 2190
Telephone: (02) 9742 7155 Facsimile: (02) 9742 7381



All Communications to be addressed to The Commissioner

14 September 2001

CHO/01692

EDAW PO Box 91 ST LEONARDS NSW 1590

Dear Mr Lang

Bushfire Risk Management Recommendation for Prince Henry Hospital

The NSW Fire Brigades carried out a bushfire risk assessment of the surrounding bushlands bounding Prince Henry Hospital on 30 August 2001. The assessment results and recommendations are as follows:

• Eastern Perimeter Bounding onto Golf Course :

The eastern perimeter has a covering of old coastal tea tree at a height of approximately 12 metres that runs parallel to the hospital buildings and existing sealed roadway. This small parcel of bush also incorporates a heavy ground covering of bushfire fuel beneath these trees which would support a fire should this area be ignited.

The inspecting Officer was informed that these trees would stay to act as a divider between the golf course and the hospital. The Officer was also informed that it was the intention to plant further tea trees to the north to complete the division between the golf course and the hospital.

Recommendation:

Due to the size of the existing coastal tea trees and ground fuel beneath and the intention to plant new trees, it is the recommendation of the inspecting Officer that an asset protection zone of not less than 8 metres remain parallel to any existing or new building.

Southern Perimeter:

The southern perimeter will incorporate a newly constructed roadway of 3.5 metres. As informed by Edaw the closest building in this area to the existing bushland will be approximately 12 metres, which is more than sufficient to act as an asset protection zone. The recommended requirements would also be 8 metres.

New South Wales Government Smoke Alarms Save Lives

W:\BF\George\Prince henry Hospital report doc: msoffice: 14 September 2001

• Northern Perimeter:

After inspecting this area and having an understanding of the intended construction and planting it is recommended that an asset protection zone of 6 metres exists between any new building for fire protection.

• General:

The recommendations in this report will reduce the risk of fire spread from surrounding bushlands and from fire impacting on Prince Henry Hospital buildings old and intended. Coastal tea tree is very volatile and a good supporter of fire and will burn intensely if ignited. It must be noted, the hospital will suffer smoke and ember attack from fire in these areas, this will be dictated by wind direction.

Should you require any further information please contact our Bushfire / Hazard Reduction Officer George Irwin on 9742 7155 or 0407 237223.

stream the golf course and the hospital. The Officer was also informed that it was the

Yours faithfully

Superintendent J Spiteri

Manager Bushfire & Natural Hazards



C.C. TO EDAW.

New South Wales Government Smoke Alarms Save Lives

uset protection zone of not less than 8 metres remain parallel to any existing of

as southern perimeter will incorporate a newly constructed readway of 3.5 metres.


Sanformed by Edaw the closest building in this area to the existing bushland will be



Appendix C

Map Extracts from the Archaeological Management Plan (AMP) and the Conservation Management Plan (CMP)

Drawing Title

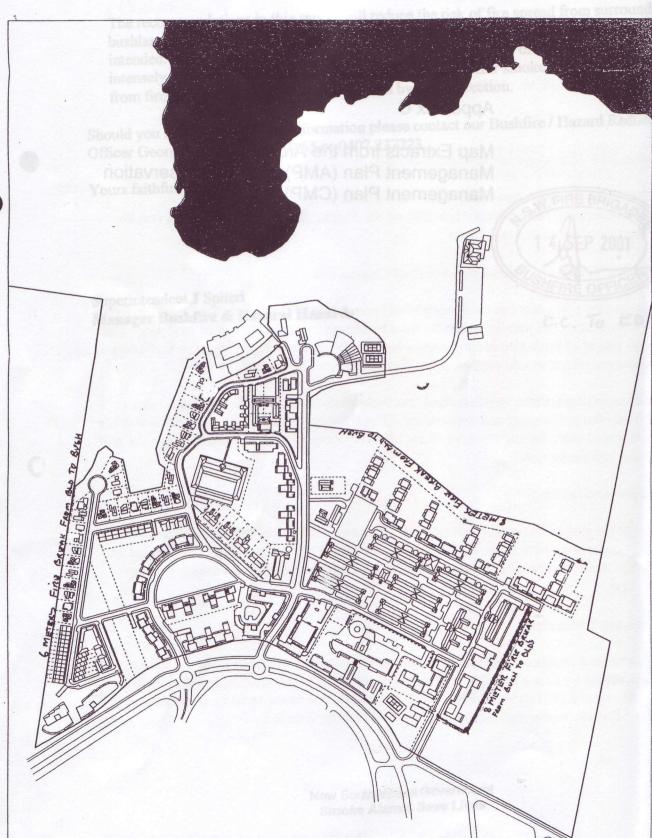

Prince Henry Masterplan

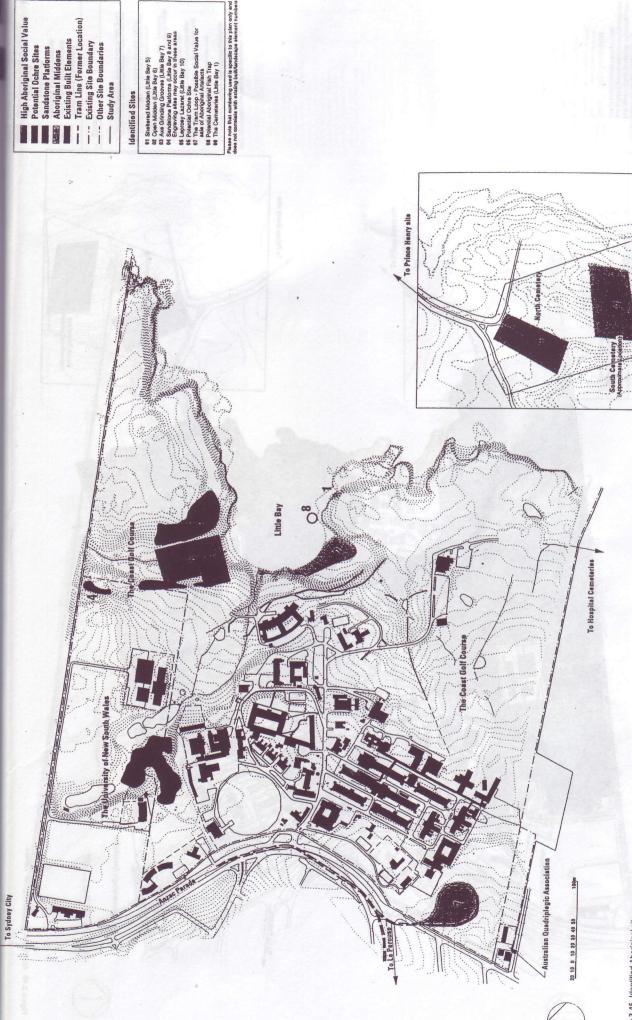


Figure 3.45 Identified Aboriginal sites.

Zone 2: High Sensitivity
Buil Areas - Likely to contain engravings and
axe grinding grooves on obscured sandstone
and/or below existing hard surfaces

Zone 3: High Sensitivity Bushland - Likely to contach intact sub-surface archaeological profiles Existing Built Elements

Existing Site Boundary Other Site Boundaries Study Area

Zone 1: Very High Sensitivity Foreshores and Golf Course - Likely to contain undelected buffals, middens, campsites and engravings etc.

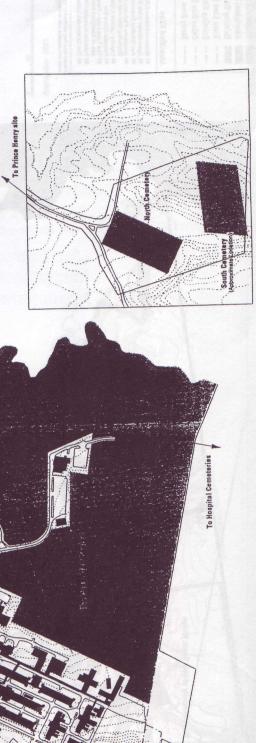


Figure 3.46 Aboriginal Archaeological Zones.

To Sydney City

Existing Built Elements

SEED Demolished Built Elements - The Tram Loop

Page 79


Little Bay

- Australian Quadriplegic Association

122

a a

To Sydney City

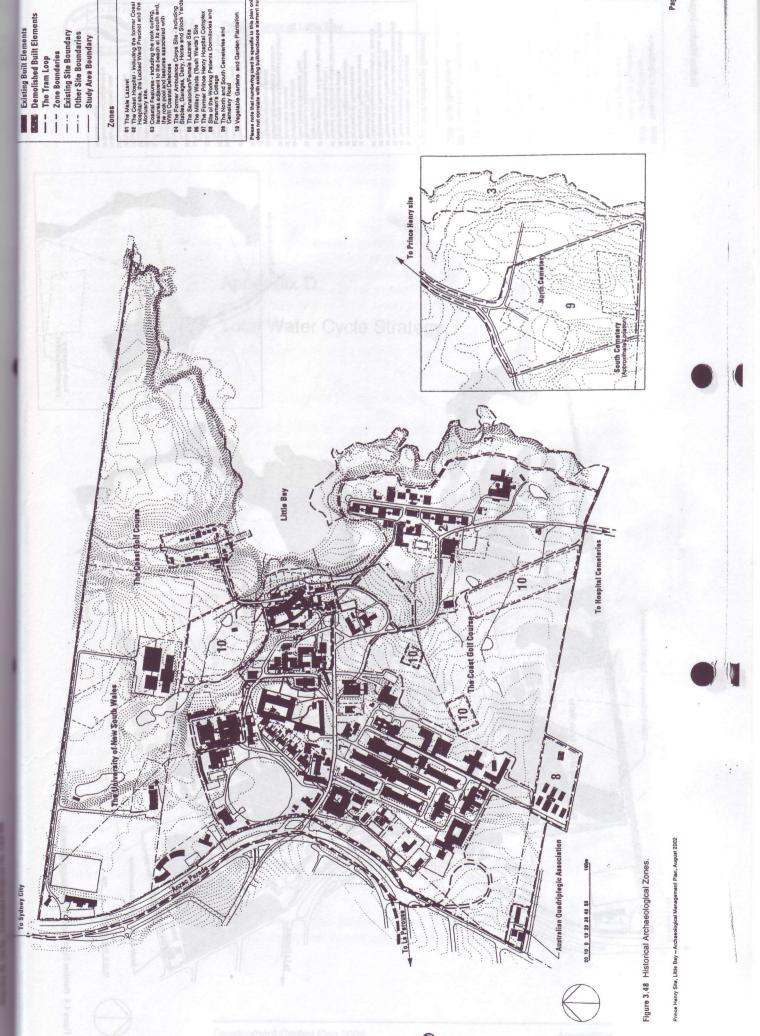

ge 83



Figure 4.4 Relative Significance of Landscape Elements.



Appendix D

Total Water Cycle Strategy

BS SI OH bal gitto AC KK

Appendix D

Total Water Cycle Strategy - Prince Henry Site

Background

Stormwater from the site drains to 3 major discharge points: Anzac Parade sub-catchment, Wetlands sub-catchment and the Golf course sub catchment (refer to Figure 1).

Overview

Harvested rainwater re-use will be shared amongst a number of users for a range of purposes. It will be re-used within the Prince Henry DCP area for irrigation of parks and the public domain, and will also be re-used by the Coast Golf Course for irrigation of their greens. The irrigation of parks and the golf course greens may need to be supplemented by mains water during summer months, however, the volume of mains water used to supplement recycled water use (particularly for irrigation of public open spaces within the Prince Henry DCP area) is to be minimised.

A substantial proportion of stormwater from the Prince Henry site will run off to the Coast Golf Course, passing through swales, which will provide a level of water quality treatment.

Key Elements

Key elements of the total water cycle strategy for the site include:

- Water storage facilities must be provided in conjunction with the Prince Henry development to allow storage of stormwater for reuse in irrigation of public open spaces (within the Prince Henry DCP area). It is noted that the water storage facilities shall be provided to the satisfaction of Council.
- High efficiency irrigation techniques and practices are to be installed and implemented in all parks within the Prince Henry site.
- Drought tolerant local native species are to be used in parks and the public domain.
- Water quality treatment measures and devices shall be provided in conjunction with the Prince Henry development. Such measures are to include, but not be limited to, bio-retention swales and gross pollutant traps (GPTs). Swales are to be dedicated to Council a minimum of 36 months post construction (or such time as agreed to by Council) to allow them to be properly established, and to ensure protection during the construction phase.
- Where pumps are required, high energy efficient pumps are to be used. Consideration shall be given to the use of solar power pumps (details to be provided at DA stage).
- Where possible, permeable paving is to be used in at-grade car parks and private lots, Car parks are to maximise opportunities for water sensitive urban design through the use of techniques such as (but not limited to) swales, rainwater planter boxes etc, suited to the scale and location of the car park. It is envisaged that these techniques will perform dual roles of water sensitive urban design and maximising the amenity and appearance of the car parks through substantial landscaping.
- Deep soil areas through out the Prince Henry DCP area are to be maximised.
- Water efficient plumbing fixtures are to be incorporated building and public domain design (ie public toilets etc).

The detailed design for the Total Water Cycle Strategy must be approved by Council prior to the lodgement of the DA/s for the open space areas across the site (proposed DA 5).



Appendix E

Watercourse categories and riparian land widths

Appendix E

Watercourse Categories and Riparian Land Widths

There are 4 watercourses within the Coast Golf Course, adjacent to the Prince Henry DCP area, known as:

- the northern watercourse:
- the central watercourses (comprises 2 watercourses/arms); and
- the southern watercourse.

These watercourses are mapped on the map titled LEP Amendment No. 28 – Zoning (Sheet 1 of 3).

The Department of Infrastructure, Planning and Natural Resources (DIPNR) has identified these 4 watercourses according to the classification system developed for the *Riparian Corridor Management Study for Wollongong LGA* as a result of the 1999 Commission of Inquiry into the long term management of the Illawarra Escarpment. This study identified a number of riparian categories to reflect the environmental significance of watercourses. DIPNR has identified two watercourse categories on the Coast Golf Course as follows:

the northern and southern watercourses: Category 2
 the central watercourses: Category 3

The riparian land widths for these categories (also contained in the provisions of Randwick LEP 1998 (Amendment No. 28) are as follows:

Category 2 watercourse: a minimum riparian land width of 20 metres on each side of the bank (measured from top of bank), or to the extent of significant remnant native vegetation which ever is the widest, to provide terrestrial and aquatic habitat, bank stability and to protect water quality

Category 3 watercourse: a minimum riparian land width of 10 metres on each side of the bank (measured from top of bank), to provide terrestrial and aquatic habitat, bank stability and to protect water quality



Appendix F

Specific Elements Conservation Policies

Appendix F

Prince Henry Site – Specific Elements Conservation Policies (SECPs) as required by the Conservation Management Plan (CMP)

Applicants should check with Council for any update

No.	Specific Elements Conservation Policy	Notes
	Entrance Group	
B-01	Entrance Gates and Gateposts	
B-02	Entrance Gatehouse	
	Pine Avenue Group	
B-04	War Memorial Clock Tower	
B-29	Former Water Reservoir	
B-32	Former Water Tower	
B-67	Wishing B(W)ell	
B-09	Henry's Trading Post	SECP completed in August 2003.
B-16	Matron Dickson Nurses Home	The state of the s
	Pathology Department Building and Water	
B-17	Reservoir	
B-29	Former Pathology Department Building	
2 20	Former Water Reservoir	
	Former Nurses Lecture Hall	
B-19	Store and Social Work Department	
	(Former Nurses Dining Hall/Lecture Hall)	
	Former Motor Garage and Retaining Walls	
B-20	Storage Shed/Former Motor Garage	
L-34	Significant Retaining Walls	
B-35	Interdenominational Australian Nurses War	
	Memorial Chapel	
B-37	Coast Golf Course Clubhouse	Outside DCP Area.
	(Former Coast Hospital Laundry)	
B-42	BJ Heffron House (A Block)	
B-43	Delaney Building (B Block)	
B-44	Pine Cottage	
B-45	Artisans' Cottages No 4 and No 5	
B-46	Artisans' Cottages No 6 and No 7	
B-47	Artisans' Cottages No 8 and No 9	
B-49	Institute of Tropical Medicine Complex	
B-54a	'Hill Theatres' (Operating Theatre No 3)	
B-54b	'Hill Theatres' (Operating Theatre No 2)	
	Flowers Wards Group	SECP completed in May 2003.
B-66	Foundation Stone	
B-56	Flowers Ward 1	SECP completed in May 2002 as part of the May 2002 CMP
		(amended February 2003).
B-57	Flowers Ward 2	,
B-58	Flowers Ward 3	
B-59	Flowers Ward 4	

No.	Specific Elements Conservation Policy	Notes
B-60	Flowers Ward 5	
B-61	Flowers Ward 6	
B-70	Former Coast Hospital Water Tower	Outside DCP Area.
L-28	Setting and Curtilage of North Cemetery	Outside DCP Area.
	Little Bay Geological Site	SECP completed in November 2003.
L-30	Critical Exposure Area	
L-31	Cleared Area	
L-34	Significant Retaining Walls	Some retaining walls are outside the DCP Area. Most retaining walls are now covered by the Road Network SECP and Motor garage SECP. Others to be incorporated into SECPs for significant buildings to be sold or are outside the DCP area and may need to be prepared as separate SECPs.
L-34	Road Network SECP Significant Retaining Walls	Preliminary SECP completed in July 2003. (Will need to be updated/amended to incorporate significant changes to the
L-35	Sandstone Kerbing/Guttering and Historic Road Alignment	road network.)